CONSUMER ELECTRONICS SHOW ROUNDUP

1851

Build a

Swipe-Card Reader

Keep your secrets safe from prying eyes

Get the

Big Picture

Large-screen TVs that you can hang on a wall are finally here

Fuel-Cell-Powered Cars and Buses

Will they someday replace today's polluting vehicles?

Build a

Digital Storage Oscilloscope


Turn any PC into a high-powered storage scope



\$4.50 U.S. \$4.99 CAN. Access Approved

Professional Power

at a hobbyist price.

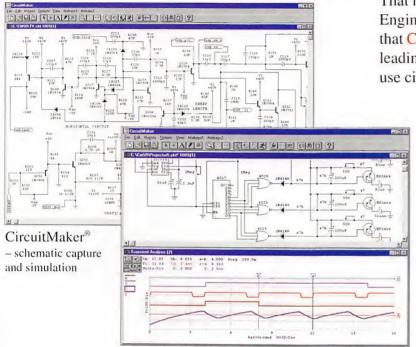


That has been our philosophy at MicroCode Engineering since 1987. So it's no surprise that CircuitMaker and TraxMaker are the leading software tools for affordable, easy-to-use circuit design, simulation and PCB layout.

QUICKLY DESIGN analog, digital or mixed analog/digital circuits with CircuitMaker's advanced schematic features. You fully control the wiring, device placement, annotation and colors. And the Symbol Editor and macro features let you create unlimited custom devices and symbols.

SIMULATE and **ANALYZE** what you create – try all the "what if" scenarios with:

- Fast, proven 32-bit SPICE 3f5/XSpice simulator
- · True mixed analog/digital simulation
- Fully interactive digital logic simulation
- 4,000-device library
- · AC Frequency Analysis
- · DC Operating Point Analysis
- · DC Transfer Function
- · Transient Analysis
- Step Function step component values and sources over a user-definable range

TraxMaker® - PCB layout and autorouting



TAKE MEASUREMENTS at any point in the circuit with a click of the Probe tool. Results appear immediately on virtual instruments like the Digital Oscilloscope, Curve Tracer, Digital Multimeter and Bode Plotter. No other simulator lets you take measurements as quickly and easily as CircuitMaker.

COMPLETE the design process with TraxMaker, a professional printed circuit board layout program with built-in autorouter. Import netlists from CircuitMaker and other schematic programs, or design boards from scratch.

- · Includes autorouter, auto component placement and Design Rules Check
- Supports up to 8 copper layers, board sizes up to 32 x 32 inches
- Surface mount and through-hole components from a customizable library
- Outputs your PCB as a Gerber file, Excellon N/C drill file, and prints to any Windows-selectable printer or plotter

RELY ON free technical support from qualified engineers. And every MicroCode product is backed by our **30-day Money-Back Guarantee** if it does not live up to your expectations.

Call 800-419-4242 for more information and free demos

(or download from www.microcode.com)
CIRCLE 171 ON FREE INFORMATION CARD

CircuitMaker Version 5	\$299
TraxMaker Version 2	\$299
CircuitMaker Design Suite™	
(CircuitMaker and TraxMaker)	\$549

Vol. 69 No. 5

CONTENTS

ON THE COVER

37 Build the InfoCard Card Scanner

We've seen them in airports, office buildings, laboratories, and anywhere else where it is important to restrict access to any area to only those who have legitimate business

there. We've also used them on an almost daily basis to gain access to our money at an ATM and even to buy groceries or gas. What we are talking about are the now ubiquitous swipe cards that are used to provide an extra measure of security to people, places, and information. In this



month's cover story, we'll show you how to add that same type of security with a system that can be integrated with computers, locks, and more. — *J. J. Barbarello*

TECHNOLOGY

13 PROTOTYPE



Consumer Electronics Show roundup and a look at how the new large-screen, flat TVs work.

FUEL-CELL-POWERED VEHICLES



Are fuel cells the technology that will replace today's polluting internal-combustion engine?

— Bill Siuru

NATIONAL ELECTRONICS TECHNICIANS DAY 1998

It's a time to honor those who have shown a commitment to the electronics-servicing profession, and an opportunity to join their ranks. — Alice Brown

As a service to readers, ELECTRONICS NOW publishes available plans or information relating to newsworthy products, techniques and scientific and technological developments. Because of possible variances in the quality and condition of materials and workmanship used by readers, ELECTRONICS NOW disclaims any responsibility for the safe and proper functioning of reader-built projects based upon or from plans or information published in this magazine.

Since some of the equipment and circuitry in ELECTRONICS NOW may relate to or be covered by U.S. patents, ELECTRONICS NOW disclaims any liability for the infringement of such patents by the making, using, or selling of any such equipment or circuitry, and suggests that anyone interested in such projects consult a patent attorney.

ELECTRONICS NOW, (ISSN 1067-9294) May 1998. Published monthly by Gernsback Publications, Inc., 500 Bi-County Boulevard, Farmingdale, NY 11735-3931. Periodicals Postage paid at Farmingdale, NY and additional mailing offices. Canada Post IPM Agreement No. 334103, authorized at Mississauga, Canada. One-year subscription rate U.S.A. and possessions \$19.97, Canada \$27.79 (includes G.S.T. Canadian Goods and Services Tax, Registration No. R125166280), all other countries \$28.97. All subscription orders payable in U.S.A. funds only, via international postal money order or check drawn on a U.S.A. bank. Single copies \$4.50. © 1998 by Gernsback Publications, Inc. All rights reserved. Printed in U.S.A.

POSTMASTER: Please send address changes to ELECTRONICS NOW, Subscription Dept., Box 55115, Boulder, CO 80328-5115.

A stamped self-address envelope must accompany all submitted manuscripts and/or artwork or photographs if their return is desired should they be rejected. We disclaim any responsibility for the loss or damage of manuscripts and/or artwork or photographs while in our possession or otherwise.

Combine this add-on module, the High-Performance Logic Analyzer from last March's issue, and almost any PC, and get a powerful digital storage scope for your workbench.

- Robert G. Brown



DEPARTMENTS

COMPUTER CONNECTIONS
The platform is the user interface. — Jeff Holtzman



- **EQUIPMENT REPORT**Fluke Model 77 III digital multimeter.
- 23 SERVICE CLINIC
 CD information storage and playback. Sam Goldwasser



TECH MUSINGS
The right way to measure AC power. — Don Lancaster



AND MORE

4 EDITORIAL

NEW LITERATURE

LETTERS

110 ADVERTISING INDEX

R Q&A

11 ADVERTISING SALES
OFFICE

27 New Products

Electronics

Hugo Gernsback (1884-1967) founder

LARRY STECKLER, EHF, CET, Editor-in-chief and publisher Adria Coren, Vice-President Ken Coren, Vice-President

EDITORIAL DEPARTMENT

CARL LARON, editor

JOSEPH J. SUDA, technical editor
JULIAN S. MARTIN, associate editor
EVELYN ROSE, assistant editor
TERI SCADUTO, assistant editor
MICHAEL A. COVINGTON, N4TMI
contributing editor
SAM GOLDWASSER, SERVICE editor
JEFFREY K. HOLTZMAN,
computer editor
FRANKLIN J. MILLER,
audio editor
DON LANCASTER,

Contributing editor

Debbie Cybula, editorial assistant

ART DEPARTMENT

ANDRE DUZANT, art director RUSSELL C. TRUELSON, illustrator

PRODUCTION DEPARTMENT

RUBY M. YEE, production director
KATHRYN R. CAMPBELL,
production assistant
KEN COREN,
desktop production director
LISA BAYNON, desktop production
MELISSA GIORDANO, desktop production

CIRCULATION DEPARTMENT

THERESA LOMBARDO, circulation manager GINA GALLO, circulation assistant

REPRINT DEPARTMENT CHRISTINA M. ESTRADA, reprint bookstore

Typography by Mates Graphics

Electronics Now is indexed in Applied Science & Technology Index, and Readers Guide to Periodical Literature, Academic Abstracts, and Magazine Article Summaries

Microfilm & Microfiche editions are available. Contact reprint bookstore for details.

Advertising Sales Offices listed on page 110.

Electronics Now Executive and Administrative Offices 1-516-293-3000.

Subscriber Customer Service:
1-800-999-7139,
7:00 AM-6:00 PM Monday-Friday MST
VISIT US ON THE INTERNET AT:
www.gernsback.com

A

Audit Bureau of Circulations Member

May 1998, Electronics Now

Take This Giant Circuit Library For Only \$495

when you join the **Electronics Engineers' Book Club®**

Hundreds of circuit ideas alphabetically arranged-from Alarm circuits to Zero crossing detector circuits!

"...includes schematics for the latest electronics circuits from industry leaders..."—Popular Electronics

The Encyclopedia of Electronic Circuits Volumes 1-3

by Rudolf F. Graf

Encyclopedia of Electronic Circuits

Volumes

ENCYCLOPEDIA OF ELECTRONIC CIRCUITS

VOLUME 1

ROBRIT S GRAD

\$180.00

VALUE

VALUE

2,344 total pages 3,490 total illustrations

Turn to this comprehensive circuit library for hundreds of project ideas...valuable troubleshooting and repair tips...and concise pinout diagrams and schematics. Each volume contains more than 700 electronic and integrated circuits and covers 100+circuit categories.

If coupon is missing, write to:

Electronics Engineers' Book Club®, A Division of The McGraw-Hill Companies, P.O. Box 549, Blacklick, OH 43004-0549

Phone: 1-614-759-3666 (8:30 am to 5:00 pm EST Monday-Friday) Fax: 1-614-759-3749 (24 hours a day, 7 days a week)

Internet: www.bookclubs.mcgraw-hill.com

As a member of the Electronics Engineers' Book Club...

you'll enjoy receiving Club bulletins every 3-4 weeks containing exciting offers on the latest books in the field at savings of up to 50% off the regular publishers' prices. If you want the Main Selection, do nothing and it will be shipped automatically. If you want another book, or no book at all, simply return the reply form to us by the date specified. You'll have at least 10 days to decide. If you ever receive a book you don't want due to late delivery of the bulletin, you can return it at our expense. Your only obligation is to purchase 2 more books during the next 12 months, after which you may cancel your membership at any time. And you'll be eligible for FREE BOOKS through our Bonus Book Program.

Publishers' Prices Shown © 1998 EEBC

ELECTRONICS ENGINEERS'

ping/handling charge & sales tax will be added to all orders.

A Division of The McGraw-Hill Companies, P.O. Box 549, Blacklick, OH 43004-9918

TYES! Please send me *The Encyclopedia of Electronic Circuits-Vols.* 1-3 (5857863), billing me just \$4.95, plus shipping/handling & tax. Enroll me as a member of the **Electronics Engineers' Book Club** according to the terms outlined in this ad. If not satisfied, I may return the books without obligation and have my membership cancelled.

Name	
Signature	(Required on all orders)
Address/Apt.#	
City	State
Zip	Phone
	ject to acceptance by EEBC. Canada must remit in U.S. funds drawn on

RPIF598

Accredited B.S. Degree in Computers or Electronics

by studying at Home

Grantham College of Engineering offers 3 distance education programs:

- B.S.E.T. emphasis in Electronics
- B.S.E.T. emphasis in Computers
- B.S. in Computer Science

E-Electronics Workbench Professional 5.0 included in our B.S.E.T curriculums -Approved by more than 200 Companies, VA and Dantes, (tuition assistance avail.)

For your free catalog of our programs dial

1-800-955-2527

http://www.grantham.edu

GCE

Your first step to help yourself better your future!



Grantham College of Engineering 34641 Grantham College Road Slidell, LA 70460-6815

ANTIQUE RADIO CLASSIFIED Free Sample!

Antique Radio's
Largest Circulation Monthly.
Articles, Ads & Classifieds.



6-Month Trial: \$19.95. 1-Yr: \$38.95 (\$55.95-1st Class). A.R.C., P.O. Box 802-L19, Carlisle, MA 01741 Phone:(508) 371-0512 VISA/MC Fax:(508) 371-7129

Trees Make a World of Difference

Find out how trees can make a world of difference for you, and your neighborhood. For your free brochure write: Trees For America, The National Arbor Day Foundation, Nebraska City, NE 68410.

The National Arbor Day Foundation

BE A TEACHER. BE A HERO.

Call 1-800-45-TEACH.

EDITORIAL

T-DAY 1998

The government tells us that the economy is in great shape and unemployment is down. That might be true, but it does not change the fact that to get ahead and stay ahead in your career, you need an advantage over your competition.

Nowhere is that more true than in the electronics-servicing profession. For an electronics technician, the challenge is twofold. First, he or she must deal with the types of ups and downs that are common to any profession, especially in these days when companies ruthlessly look after their bottom line. But second, they must make sure that they do not become obsolete.

The problem is that electronics technology is constantly evolving. What was state-of-the-art last year is mundane and common this year. What was state-of-the-art five or ten years ago is now an antique.

So, then, how does an electronics technician stay current? Even more important, how does a technician demonstrate to his present or potential employer that he or she is both up-to-date and competent?

That's where the Certified Electronics Technician (CET) program comes in. Technicians who have earned the CET designation have demonstrated to their employers and colleagues that they have the knowledge needed to deal with today's technologies, and the skills to do so successfully. They have also demonstrated that they have the dedication and desire needed to succeed in their chosen profession.

To honor those professionals who have earned the CET designation, and to encourage others to join their ranks, the International Society of Certified Electronics Technicians (ISCET) has set aside Tuesday, April 21, 1998 as "T-Day," and the week of April 21 through April 25 as "T-Week". As part of the celebration, ISCET has established a network of Volunteer Examiners to help qualified electronics technicians earn the CET designation. To learn more about that opportunity, the CET program, and ISCET, please turn to the story on page 54 or visit ISCET's home page at www.iscet.org. Both you and your career will be glad you did.

Call Laron

Carl Laron Editor



LETTERS

SEND YOUR COMMENTS TO THE EDITORS OF ELECTRONICS NOW MAGAZINE

Capacitance-Substitution Box Error

There is an error in the "Audio Update" column in the February 1998 issue of Electronics Now. In the schematic for the capacitance-substitution box, only the first row of capacitors connects to one of the binding posts. The PCB layout is correct, and so is the parts-placement diagram. But if you trace through the schematic, you'll see that from the second row on, the capacitors do not connect to both binding posts when switched.

REN TESCHER via e-mail

If They Build It, Will They Come?

Your editorial in March 1998 raised serious questions. One might also ask, "If a DTV commercial airs, and no one has sets capable of receiving it, can you bill for it?" The answer is clearly NO, since advertising cost is based upon viewers' share data. No viewers means no billing. Will stations convert, with no initial revenue stream, or turn in their licenses for the free use of spectrum? It seems obvious that both cable and over-the-air channels must subsidize their cost for equipment for DTV transmission with real revenue from NTSC standard advertising. The networks had to install new gear when color TV was introduced, but the pie was divided only three ways back then in the late 1950s. As cable multiplied the number of channels, the pie became decimated, raising the investment/return number to perilous levels. The FCC has enabled the subsidization by allowing a flexible mix of broadcasting, so what's the fuss all about? The new sets will have dual-standard performance, and as aging sets are replaced by new ones, we will eventually all have DTV sets.

For me, a professional in the industry who gets to play with the latest toys long before I can afford them at home, the real question is whether we really need High Definition TV. After living with three

different DVD players and Laserdisc players, and having seen many HDTV demonstrations, I have personally concluded that what I have is good enoughfor now. I bought far more surround sound equipment in the last year than TVs. The next TV I buy must be priced under \$1600, offer just as tall a picture as my \$800 32-inch set (forget the screen's diagonal measurement, guys), have DTV input capability, and make watching NTSC-format DVDs, LDs, and VHS tape even better. It's simple, really. Are you marketing guys listening? MICHAEL NEIDICH

Santa Clara, CA

Web Compliment

I just wanted to take a second to compliment you and your entire staff on one of the best Web-site designs I have ever seen. It was clear, concise, and to the point. While it was rather graphics rich, the pages loaded quickly, and I was able to find exactly what I needed (the address change form).

It's great to see someone using the media effectively and creatively. Keep up the good work.

TIM OUINN via e-mail

A Resource Omitted

I read the item on handheld data acquisition in Don Lancaster's "Tech Musings" column (Electronics Now,

Write To: Letters. Electronics Now Magazine, 500 Bi-County Blvd., Farmingdale, NY 11735

Due to the volume of mail we receive, not all letters can be answered personally. All letters are subject to editing for clarity and length.

January 1998). The world's leader in the industry was conspicuously missing from the list of resources. Symbol Technology is the only company that designs, develops, manufactures, and markets its products. Our revenues exceed \$700 million, and we are growing at a rate of 20% per year. Interestingly enough, one of our competitors listed (Intemec in Washington) is also a customer. They purchase our scan engines for their products. Many of those listed who are not competitors are customers. If any of your readers are interested in finding out more about us, they can visit our Web site: www.symbol. com.

MARGARETT M. EISENBERG Senior Human Resources Representative Symbol Technologies, Inc.

Holtsville, NY



We're on the web

FREE

We are starting up, but you can watch us grow!

Projects for beginners to experts! **New Product information!** Bookstore-discover what's new!

http://www.poptronix.com

WE'RE WITH YOU EVERY DAY 24 HOURS A DAY! DROP IN! **WE'D LOVE TO HAVE YOU VISIT!**



A & D

READERS' QUESTIONS, EDITORS' ANSWERS

Electronic Dice

I want to build an electronic set of dice using LEDs in the traditional arrangement. The purpose of using LEDs instead of a numeric display is to teach children how to count and add dots. I want to be able to disable one of the two dice for some games. I want to build this project as a Christmas present for my grandchildren. — C. J. G., Sebring, FL

A Unfortunately, our backlog, and the fact that this column is written four months before publication, didn't allow us to get to this project in time for Christmas. But perhaps the children could enjoy it during summer vacation.




FIG. 1—THE LEDs in our electronic dice are switched in three groups: A, B, and C. Each whole group is either on or off.

As you can see from Fig. 1, the seven LEDs that serve as spots on each die can be switched in three groups, which we'll call A, B, and C. For example, to display 5, you'd turn on groups A and C. Accordingly, the LED drivers, shown in Fig. 2, only need three input signals. Each signal tells whether to illuminate each set of LEDs.

To roll the dice, use the oscillator/counter circuit in Fig. 3. When the button is pressed, the oscillator runs at 5 kHz and the 4017 decade counter activates its outputs, one at a time, too fast for the human user to see, resetting itself whenever the count reaches 7 (output

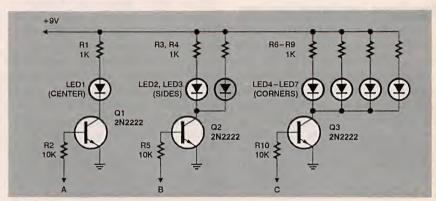


FIG. 2—BECAUSE THE LEDs are driven in three groups, this LED driver circuit needs only three inputs.

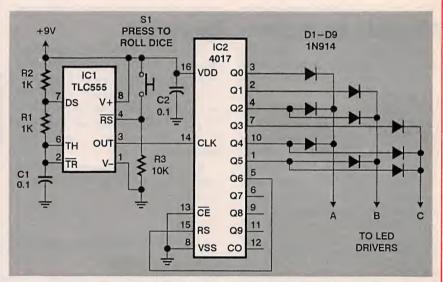


FIG. 3—TO ROLL THE DICE, press switch S1. When the oscillator stops, one of the outputs of the 4017 is left high, determining the dice display.

Q6). When the button is released, the oscillator stops, one of the outputs is held high, and the diodes direct the signal to the appropriate combination of A, B, and C outputs, which are connected to the LED drivers.

To build two dice, you can connect one oscillator to two 4017s. To deactivate one die, cut off power to its LED drivers. Leave both 4017s powered up because CMOS chips can be damaged if their inputs are driven while supply voltage is absent.

Weather Satellites

It just occurred to me that the PIC microcontroller chips would be perfect for collecting weather satellite data streams and converting the tone bursts into binary code. Unfortunately, I haven't been able to locate a source for what data streams are transmitted. — N., Waco, TX

A more powerful microprocessor might be even better for this—in fact, most satellite experimenters use their PCs for ease of programming. To learn more about weather satellites, and to see some applicable 8088 assembly code, see the *Weather Satellite Handbook* published by the American Radio Relay League (Newington, CT 06111; Web: www.arrl.org).

Hacking VCR Timers

The electronic timers built into VCRs are handy since they cover long periods (up to a year) and provide for multiple on-off cycles. I have acquired several defunct VCRs and am reusing their timers for other purposes. I've had no trouble finding a switched 12-volt circuit in the VCR and connecting a relay there. To get the timer to work, I had to short out the "cassette-in" switch and cover the end-of-tape detector with black electrical tape. But how can I keep the takeup reel's motion sensor from shutting down the VCR after a few seconds? — E. R. B., Jamaica, NY

Reusing VCR timers is a worthwhile idea. However, as you've discovered, VCRs include many protective mechanisms to keep them from eating tapes, and you have to do several things to fool the timer into thinking it's controlling a properly working VCR.

The take-up reel motion detector normally uses an LED whose light is reflected into a photocell by a disk with alternating black and white sectors, creating a pulsing signal. When the pulses stop, the control circuit infers that the tape must not be moving.

You might drive the LED from a flasher circuit (or substitute a flashing LED) and use a stationary white reflector. Or you might feed a low-frequency squarewave (from a 555 or the like) directly into the control chip in place of the signal from the photocell. If you take the latter approach, not knowing the electrical requirements, you should probably start by feeding the signal through a large resistance (such as 1 megohm) and decrease the resistance until you get a response.

Color Subcarrier Frequency

I have an NTSC laserdisc player that I would like to use with my JVC television, which supports PAL, SECAM, and NTSC-

4.43 formats. Unfortunately the laserdisc player uses the American standard 3.58-MHz subcarrier frequency, rather than 4.43 MHz, and I can only see the picture in black and white. Is there any circuit I can build to convert the 3.58-MHz signal to 4.43 MHz so I can get color? — N. P., Samambula, Suva, Fiji

A It doesn't sound simple because what needs converting is a small part of a very complex signal, and it's not a fixed 3.58-MHz oscillation—it's a subcarrier with color information phase-modulated onto it. The conversion circuit would

have to demodulate the composite video signal completely into luminance, color, and sound, and modulate it again. This would require much of the circuitry of a television set.

PAL, SECAM, and NTSC are of course the three major systems of color TV modulation (British, French, and American respectively). The NTSC standard specifies a 3.58-MHz subcarrier, but you indicate that your TV uses a 4.43-MHz subcarrier, which is standard for PAL and SECAM. The bottom line is that your TV supports NTSC video only partially.






FIG. 4—HOW TO WIRE AN INTERCOM. The master can set any remote unit to off (silence), on (to feed it audio from whomever is talking), or listen (to listen continuously to the remote).

Intercom Wiring

My question is about the intercom you describe in the February 1997 issue (pg. 14). It works very well with two stations, but how can I hook up more than that? — D. R., St.-Augustin-de-Desmaures, Quebec, Canada

Note that in the original diagram, the two remote units are connected in parallel. That is, each unit is connected to the same three places in the amplifier circuit. You can connect many more units in parallel with them in the same way.

Figure 4 shows a more sophisticated way to wire an intercom so that the master unit can turn any of the remote units on or off, or place it in continuous "listen" mode (for baby monitoring and the like). When any unit talks, it is heard on all the units that are switched on, not just the master.

The speaker in the master unit is wired just like a remote unit except that it does not need an "on/off/listen" switch; wire it to be "on" all the time.

Two Minutes of Power

I need a 555 timer circuit that will activate a relay for two minutes when a
pushbutton is pressed, which means the output will stay high for two minutes, then go
low and stay low, and go high for two minutes again when the button is pressed again.
The circuit may be similar to "Delayed
Power-On" published in November, 1997,

pg. 8, but I tried to change it without any luck. — C. L., Pittsburg, KS

A The circuit is indeed very similar, as shown in Fig. 5. (See also "Five Minutes of Power," which we discussed on pg. 12 in the January 1997 installment of this column.)

The main difference is that the resistor and capacitor are swapped, so that the 555 output goes high when the capacitor is discharged rather than when it is charged. Pressing the button discharges the capacitor, and it takes about two minutes to charge up again.

To drive a relay, be sure to use a conventional bipolar 555 (NE555, LM555), not the CMOS 7555, LMC555, or TLC555—they can't source enough current. Even so, the relay coil must not draw more than 200 mA. Diode D1 protects the 555 from inductive kickback.

The Third Wire

Why does my laptop computer battery pack have three wires instead of two?—
R. A. B., Falmouth, VA

The third wire probably goes to a temperature sensor that is used to control fast charging.

Point of Grammar

Why do you further the misuse of the English language by speaking of "an




FIG. 5—WHEN THE PUSHBUTTON SWITCH (S1) is closed, the relay closes for two minutes, then opens. Do not use the CMOS versions of the 555 chip (7555, TLC555, etc.) for IC1.

LED" ("Q&A," August 1997, page 8, Fig. 2)? — D. W. E., Nappannee, IN

A It's not an error. The usage of a and an depends on pronunciation, not spelling. We pronounce LED as "ell ee dee," which begins with a vowel sound, so we put an in front of it. If you pronounced it "led," you would of course say "a LED."

Conductive Rubber For LCD

According to your statement at the end of the Q&A page, you welcome questions. I am sorry to say that through all the years I have subscribed to your magazine, I have never received an answer to any of my questions. I hope that you will answer the following:

In your August 1997 issue, pg. 8, you described the conductive rubber that is used under LCD displays. I have a Precision Data multimeter that uses this material. Apparently, my conductive strips have aged and are not conducting properly. Do you know where I can purchase these strips and how they are identified? — W. B. H., Knoxville, TN

A We regret that we can answer only about a third of the questions we receive. Space limitations are the biggest reason; also, we choose questions that are of wide interest and that we can answer reliably. (Even we don't know everything!)

Sometimes, when a question is a real puzzler, we throw it open for readers to answer. That's what we're going to do with yours, since we've never seen the

HOW TO GET INFORMATION ABOUT ELECTRONICS

On the Internet: See our Web site at http://www.gernsback.com for information and files relating to our magazines (Electronics Now and Popular Electronics) and links to other useful sites.

To discuss electronics with your fellow enthusiasts, visit the newsgroups sci.electronics.repair, sci.electronics.components, sci.electronics.design, and rec.radio.amateur.homebrew. "For sale" messages are permitted only in rec.radio.swap and misc.industry.electronics.marketplace.

Many electronic component manufacturers have Web pages; see the directory at http://www.hitex.com/chipdir/, or try addresses such as http://www.ti.com and http://www.motorola.com (substituting any company's name or abbreviation as appropriate). Many IC data sheets can be viewed online. Extensive information about how to repair consumer electronic devices and computers can be found at www.repairfaq.org.

Books: Several good introductory electronics books are available at RadioShack, including one on building power supplies.

An excellent general electronics textbook is *The Art of Electronics*, by Paul Horowitz and Winfield Hill, available from the publisher (Cambridge University Press, 1-800-872-7423) or on special order through any bookstore. Its 1125 pages are full of information on how to build working circuits, with a minimum of mathematics.

Also indispensable is *The ARRL Handbook for Radio Amateurs*, comprising 1000 pages of theory, radio circuits, and ready-to-build projects, available from the American Radio Relay League, Newington, CT 06111, and from ham-radio equipment dealers.

Copies of past articles: Copies of past articles in Electronics Now and Popular Electronics (post 1993 only) are available from our Claggk, Inc., Reprint Department, P.O Box 4099, Farmingdale, NY 11735; Tel: 516-293-3751.

special rubber material for sale as a separate item either. (As explained in November, it's not just a hunk of conductive rubber or plastic; it consists of conductive strata separated by insulators to prevent cross-connections.) Our first suggestion would be that you might ask Precision Data whether they can supply it as a replacement part; after all, their LCD display is probably custom-made. Alternatively, can a reader help?

Electronics Now and many other magazines are indexed in the *Reader's Guide to Periodical Literature*, available at your public library. Copies of articles in other magazines can be obtained through your public library's interlibrary loan service; expect to pay about 30 cents a page.

Service manuals: Manuals for radios, TVs, VCRs, audio equipment, and some computers are available from Howard W. Sams & Co., Indianapolis, IN 46214 (1-800-428-7267). The free Sams catalog also lists addresses of manufacturers and parts dealers. Even if an item isn't listed in the catalog, it pays to call Sams; they may have a schematic on file which they can copy for you.

Manuals for older test equipment and ham radio gear are available from Hi Manuals, PO Box 802, Council Bluffs, IA 51502, and Manuals Plus, PO Box 549 Tooele, UT 84074.

Replacement semiconductors: Replacement transistors, ICs, and other semiconductors, marketed by Philips ECG, NTE, and Thomson (SK), are available through most parts dealers (including RadioShack on special order). The ECG, NTE, and SK lines contain a few hundred parts that substitute for many thousands of others; a directory (supplied as a large book and on diskette) tells you which one to use. NTE numbers usually match ECG; SK numbers are different.

Remember that the "2S" in a Japanese type number is usually omitted; a transistor marked D945 is actually a 2SD945.

Hamfests (swap meets) and local organizations: These can be located by writing to the American Radio Relay League (Newington, CT 06111; http://www.arrl.org). A hamfest is an excellent place to pick up used test equipment, older parts, and other items at bargain prices, as well as to meet your fellow electronics enthusiasts—both amateur and professional.

Pinball Wizard Found

In your September 1997 issue, you had someone wanting old Gottlieb parts. Most parts for pinball machines can usually be obtained at local distributors, but Gottlieb is out of business. The only place I know of so far that has parts for their machines is Two Bit Score, 4418 Pack Saddle Pass, Austin, TX 78745, Tel: 512-447-8888. — Staci Steddum, Wichita, KS

Writing to Q&A

That's all for this month. As always, we welcome your questions; please write to: "Q&A," Electronics Now Magazine, 500 Bi-County Blvd., Farmingdale, NY 11735. The most interesting ones are answered in print. Please be sure to include plenty of background information (we'll shorten your letter for publication). If you are asking about a circuit, please include a complete diagram. Due to the volume of mail, we regret that we cannot give personal replies.

WINDOWS 95 One Step at a Time

Don't know what to do when confronted with Microsoft's Windows 95 screen? Then you need a copy of Windows 95—One Step at a Time. Develop your expertise with the straight-forward presentation of the fre-



quently-used features that make Windows 95 so valuable to the PC user.

To order Book BP399 send \$8.99 plus \$3.00 for shipping in the U.S. and Canada only to Electronics Technology Today Inc., P.O. Box 240, Massapequa Park, NY 11762-0240. Payment in U.S. funds by U.S. bank check or International Money Order. Please allow 6-8 weeks for delivery.

BRULLITEMEDIA on the PC

MULTIMEDIA on the PC!

What is Multimedia? What can it do for you? It can do lots of nice things! This 184-page book helps you create your own multimedia presentation.

Multimedia applications by people like you can revolutionize educational and business applications as well as bring more FUN, FUN, FUN into your leisure computer activities.

Mail coupon	to:		
Electronics Technology Today, Inc. P.O. Box 240 Massapequa Park, NY 11762-0240			
(PCP120). I end to cover the bo	e my copy of <i>Mu</i> close a check or mo ook's cost and shi ctate resident mus	oney order for \$18 ipping-and-handl	. 95 ing
Name			_
Address			
City	State	Zip	_
All orders mus	t he paid in II C f	unde only Corne	

orders accepted outside of USA and Canada. Please

allow 6-8 weeks for delivery.

9

Elecronics Now, May 1998

The platform is the UI

E'VE BEEN RUBBING OUR NOSES PRETTY DEEPLY IN PALMPILOT PROGRAMMING THE PAST FEW MONTHS.

I THINK WE'VE GOTTEN A PRETTY GOOD IDEA OF WHAT'S INVOLVED, INCLUDING THE CAPABILITIES AND LIMITATIONS OF

the target platform, the development tools, and the development process. It's time now to back up a little, take stock of where we've been, why we went down that path, and chart a new direction.

I was initially attracted to the PalmPilot for some pretty mundane reasons—basically, I thought it would help me solve some pretty mundane problems, such as appointment tracking, time and billing, and the other things that an organizer should do. After purchasing my Pilot, I quickly realized that there was more to it than just a better (or at least more modern) way of getting organized.

My view of just what that "more" amounts to has evolved over the past year, but in essence in comes down to this: Probably unintentionally, the Pilot has become the first serious challenge to the Wintel platform since perhaps the introduction of the Macintosh. No, I'm not suggesting that the Palm OS will soon or ever overtake Windows, or that the Dragonball 68K CPU is going to put Intel out of business.

What Palm has done is create a new platform. In the computer business, the term platform usually denotes a CPU family, a hardware architecture, and an operating system. For our purposes, I want to use the term somewhat differently. Here it means an intellectual, business, and even cultural magnet, with increasing momentum, like a snowball rolling downhill.

This new platform is making Palm

(3Com) a little more successful as a company. It is also spawning a slew of other companies building products to complement the platform. Those products span a broad range, including system hacks, utility programs, application programs, accessories such as styli and cases, peripherals such as keyboards and IRDA connectivity (soon), and even complete OS replacements for special markets and other languages. Most importantly in

our hype-ridden age (witness Java), it shows that another platform can be a viable business proposition.

That has all happened in a very short period of time—less than two years. There is excitement among both users and developers unlike anything I've seen for a long time. To many of us, the whole phenomenon is strongly reminiscent of the early and mid eighties, when the PC platform was starting to take off.

The surest sign that what I'm saying is true is the way Microsoft is scrambling to produce a workable version of Windows CE, and the way the hardware manufacturers such as Compaq, HP, TI, Casio, and Philips are scrambling to evolve their designs to track that of the Pilot. As I write this, CES is just a few



THE NINO 300 FROM PHILIPS is one of the first of a new generation of palm computers that use the Windows CE 2.0 operating system. It is designed to compete directly with the PalmPilot.

The UI is the Problem

Now zoom out. In the overall landscape, there is probably a 200:1 ratio between Wintel machines and PalmPilots. Further, they don't even compete, right? So why is Microsoft so worried? Perhaps because the race is not yet over.

The race? What race? The race to mature-industry status, like automobiles, washing machines, refrigerators, even telephones.

With the advent of pretty darn capable \$1000 machines the past year or so, it could be argued that PCs have reached commodity status; that is, that they are distinguished more by price and marketing than by technology and innovation.

The problem is the user interface. And (as always) I don't simply mean the arrangement of GUI elements on a screen. I'm talking about the whole gestalt of the computer experience. Some of it is technology driven; some, socially driven. To begin with the latter, there has to be a certain level of invisible social awareness and comprehension of a technology for it to become truly ubiquitous, like the automobile.

Nearly every normal person in our society knows what an automobile is, what is its purpose, and how to use it. Usage training is an integrated part of growing up. Not so with computers, not by a long-shot. And why not? Because they are too hard to use.

I don't mean that word processors or windowing systems themselves are too hard to use. I mean that the whole experience of computing is too hard for most people. This means system-level stuff like fragile configuration management, system and data vulnerability, maintenance, and upgrades.

Think about it. How many (nontechnical) users do you know who don't do backups? Has your machine ever been trashed by a corrupt registry? How do you handle system and application software upgrades? Hardware upgrades? System transfers?

What we need are "unbreakable" systems. (Spare me; I'm well aware nothing is truly unbreakable.) At a minimum, systems that you would have to consciously rather than inadvertently or ignorantly

Perhaps some examples will make things clearer. Suppose we had a system

- Password-protects all system-level resources so that you couldn't accidentally format your C drive, or erase all the DLLs in your system directory;
- · Allows additional storage to be "mounted" under a unified filing system (like UNIX);
- · Predicts and provides notification of incipient hardware failure;
- · Predicts and provides notification of incipient resource depletion (e.g., out of hard drive space, disk thrashing due to insufficient RAM);
- · Provides a clean, simple method of moving a (software) system from one (hardware) host to another;
- · Provides automatic and invisible backup through some RAID-like tech-
- Provides a built-in uninterruptible power supply;
 - Provides a fool-proof way of per-(Continued on page 26)

New and Bestselling Titles from CRC PRESS



Catalog no. 8345

1997, 2,624 pp.

ISBN: 0-8493-8345-5


\$115.00

Electrical Engineering Handbook

Catalog no. 8574 January 1998, 2,752 pp. ISBN: 0-8493-8574-1 \$115.00

web site!

http://www.crcpress.com



Communications Handbook

Catalog no. 8349 1997, 1,632 pp. ISBN: 0-8493-8349-8 \$135.00



The Engineering Handbook

Catalog no. 8344 1996, 2,352 pp. ISBN: 0-8493-8344-7 \$115.00



Digital Signal **Processing** Handbook

Catalog no. 8572 Janaury 1998, 1,776 pp. ISBN: 0-8493-8572-5 \$129.95

Mention 'Electronics Now' and recieve 10% off book list price!

For more information, please call 1-800-272-7737 or write to:

(CRC PRESS • 2000 Corporate Blvd., N.W. • Boca Raton, FL 33431

In Florida and outside the U.S., please call 561-994-0555

Order Code: NOW01

Contact us through e-mail:

orders@crcpress.com

Electronics Now, May 1998

The Electronics Industry is looking for a lot of good people!

Here is your chance to get in on the ground floor as an Associate CET. Is your job title "Electronics Service Technician?" Would you like to have that title? You can prove you qualify for the title with a CET Associate Certificate. It can be your career door-opener and begin your rapid advancement!

A technician or student of electronics with less than a total of four years of basic experience may take the Associate Level Exam. The exam is the basic electronics portion of the full-credit CET exam. The 75-question, multiple-choice test covers basic electronics, math, DC and AC circuits, transistors and semiconductors, instruments, measurements and troubleshooting. A successful Associate CET will receive a wall certificate valid for four years and is eligible to join ISCET as an Associate Member. ISCET is the International Society of Certified Electronics Technicians.

The ISCET Computer-Aided Associate-Level Study Guide prepares you for the Associate CET Certificate by randomly selecting sample questions with appropriate diagrams, provides multiple-choice answers, grades the test and provides a summary of your strong and weak points.

Diskette requires IBM computer or compatible with VGA color monitor, 3.5-in. drive and a hard-disk drive.

CLAGGK INC. – CET Computer-Aided Study Guide Offer PO Box 4099, Farmingdale, New York 11735 YES, I want to step up to a career in servicing. Here is my order for the CET Computer-Aided Study Guide on a 3.5 diskette. I am enclosing \$39.95 (price includes shipping and handling changes) in U.S. funds. Bill my VISA MasterCard Expire Date J____ USA Bank Check US or International Money Order Card No. Signature Name (Please Print) Address State Zip New York residents add local sales taxes. Canadians add \$6.00 per order. No foreign orders. Do not send cash. Checks drawn on US Bank and International Money Orders in US funds

only. Credit card users may telephone or FAX orders. Telephone 516-293-3751 or FAX 516-


293-3115. Price subject to change. Allow 6 to 8 weeks for delivery.

Proof Positive that you are a Certified Electronics Technician



Computer Software Program —
ISCET Computer-Aided
Associate-Level Study Guide

Prepare yourself for the 75-question CET Associate Examination. Model examinations provide the technician with a study program and introduction to the actual examinations. The model examinations are automatically graded in decimal numbers and bar graphs that can be outputted on your printer. The questions for each exam are selected randomly from a loaded data base—no two exams are exactly the same. When you answer a question, the correct answer is displayed and an explanation is given. From the printouts you will determine whether you need more practice and in which topic areas, or if you are ready to take the real test and continue to promote your electronics career today!



On The Floor at CES

f you've never attended a mega trade show like the Winter Consumer Electronics Show, the experience is hard to describe adequately. Part serious business forum, part crazed carnival on steroids, it could only be held in Las Vegas—a city where it is very hard to tell reality from fantasy.

Usually, the show produces lots of heat and smoke, but little fire. Occasionally, however, a trend or product that will profoundly affect some part of our lives will make its first appearance on the show floor. Thanks in part to the FCC's ruling on DTV (digital TV), this was one of those rare years.

Be Digital or Be Square

Despite the fact that no one, including broadcasters and manufacturers, is really quite sure what shape digital TV will take, and despite the fact that DVD sales, while "acceptable" for a first year product, fell quite a bit short of the hype that accompanied its introduction, it seemed that every manufacturer found some way to work the word "digital" into their product offerings. But without a doubt, the 800-pound gorilla of the show was DTV. Every manufacturer of television sets, video displays, or any type of video product, had to deal with the coming change in standards in some way.

Of course, the ones most directly impacted were the set manufacturers. Without exception, every company from the major players to the smallest supplier of off-brand sets from the Pacific Rim showed some type of DTV, and most showed wide-screen models. Most manufacturers expect that initial buyers will be the so-called "early adopters" who generally have excess funds at their disposal and want to be the first on the block with the latest technological advances. As such, most of the initial

DTV products will be high-end, high-cost, large-screen 16:9 models capable of producing a full 1080-line (interlaced) HDTV image.

But what about the rest of us? The full switch to DTV is not scheduled until 2006 at the earliest. However, most feel that even that target date is unattainable. Because of that, manufacturers are bringing a new generation of "DTV-ready" analog sets to market. Those sets look and work just like the TVs we are all accustomed to, but include componentvideo and/or RGB inputs. Typically, manufacturers will be adding these features to their higher-end, large-screen models first. A few models are already available-in fact, high-end video projectors with RGB inputs have been available for many years-with many more slated to be available by this fall.

Of course, if a DTV-ready set is to

receive a DTV broadcast, some type of set-top decoder box will be needed. Again, almost everyone had black-box prototypes, but most manufacturers were vague about costs and delivery dates. One exception was Zenith, which announced that they would have a full-featured decoder available this spring. The cost? It carries a suggested list price of \$5995.

Of course, not all the digital news was DTV. Almost all manufacturers announced new DVD offerings. Among other things, this coming year will see DVD changers and portable DVD players. Several manufacturers announced DIVX players, though others were vague about plans to support the controversial DVD-derivative format. For more on DIVX, see the Editorial in the December 1997 issue of Electronics Now.



MOST OF THE FIRST DTV PRODUCTS are slated to be wide-screen, high-end models like this 64-inch rear-projection model from Philips.

FOR MORE INFORMATION

Crosley Radio

1220 E. Oak Street Louisville, KY 40204 Tel: 502-583-4246 Fax: 502-584-8531

emWare, Inc.

1225 E. Fort Union Blvd. Suite 200 Midvale, UT 84047 Tel: 801-256-3883 Fax: 801-256-9267 E-mail: sales@emware.com Web: www.emware.com

ESP Electronics

11666 Gateway Blvd Suite 205 Los Angeles, CA 90064 Tel: 310-473-2874 Fax: 310-391-0058

Intel Corp.

200 Mission College Blvd. Santa Clara, CA 95052-8119 Tel: 408-765-1702 Fax: 408-765-1568

Microsoft Corp.

1 Microsoft Way Redmond, WA 98052 Tel: 425-882-8080 Fax: 425-936-7329 Web: www.microsoft.com

NUWAVE Technologies, Inc.

One Passaic Ave. Fairfield, NJ 07004 Tel: 201-882-8810 Fax: 201-882-8812 Web: www.nuwav.com

Panasonic Consumer Electronics Company

One Panasonic Way Secaucus, NJ 07094-2999 Tel: 201-348-7000 Fax: 201-348-7209 Web: www.panasonic.com/pcec

Philips

4 Perimeter Center East Atlanta, GA 30346-6401 Tel: 770-821-2400 Fax: 770-821-3126

E-mail: info@philipsmagnavox.com Web: www.philipsmagnavox.com

Sharp

Sharp Plaza Mahwah, NJ 07430 Tel: 201-529-8200 Fax: 201-529-8919 Web: www.sharp-usa.com

Thomson Consumer Electronics

10330 North Meridian Street INH-310 Indianapolis, IN 46290 Tel: 317-587-3000 Fax: 317-587-6731 Web: www.rca-electronics.com

Tri-Vision Electronics

41 Pullman Court Scarborough, ONT Canada M1X 1E4 Tel: 416-298-8551 Fax: 416-298-7976 E-mail: tvision@istar.ca

Zenith

1000 Milwaukee Avenue Glenview, IL 60025 Tel: 847-391-7000 Fax: 847-391-5273 Web: www.zenith.com

The Shape of TV

We already know that, thanks to DTV, one of the future shapes of television will be wide. However, to that you might also be able to add flat and round.

A flat TV that consumers could hang on a wall just like a picture has been a holy grail for the consumer-electronics industry for decades. Now, that grail is finally within reach. Nearly every TV manufacturer had a large-screen, 16:9 format, flat-panel set on display. Nearly all were based on plasma technology (Sharp showed one that was a plasma/LCD hybrid), nearly all were prototypes (though a few are scheduled to ship this year and one should be avail-



DURING THE TRANSISTION TO DTV, most manufacturers will be offering DTV-ready analog sets like this 36-inch model from Sharp.

able by the time you read this), and all were very expensive (\$11,000 and up). Typically, the sets on display were no more than about 4-inches thick and sported screen sizes of 42 inches (diagonal). For more on the technology behind these sets, see "Get the Big Picture" elsewhere in this installment of "Prototype."

OK; we've taken care of wide and flat, but round? Believe it or not, one small company, ESP Electronics, was demonstrating a "360-Degree Television" that produces a 19-inch picture and offers in-the-round theater-style viewing to watchers seated on all sides of the unit.

There were a couple of drawbacks, however. One was cost; the unit is slated to be limited to a collectors-edition run of 1000 sets, each with a price of \$40,000. The other was that the unit on display suffered from extreme flicker. Talking to company officials, we learned that they had solved the problem, but did not have enough time to implement that solution prior to the show.

Other News

A show as large and diverse as CES is difficult to fully summarize in the space

we have available, but there were a few other noteworthy trends and develop-

Home security and the Internet would seem like topics that are far removed from each other, yet products and systems that used the Internet in home-security and remote-control applications were shown by several companies, including Intel. One company, emWare, demonstrated a prototype Weiser "Powerbolt" door lock that can be controlled over the Internet using their software.

The much ballyhooed V-Chip also made its debut at CES. The Telecommunications Act of 1996 required the V-Chip to be incorporated into new TV designs beginning this



TO RECEIVE DIGITAL SIGNALS ON AN ANALOG SET, a viewer will need a set-top box. One of the first on the market is this unit from Zenith.


year. For those who want to exercise parental control without buying a new set, Tri-Vision had on display four outboard units that work with existing sets and the current TV-rating system to electronically control youngsters' access to TV programming. The inventor of the V-Chip, Tim Collings, is on Tri-Vision's board of directors.



PANASONIC WILL BE OFFERING a portable DVD player later on this year.

Another product that generated some attention was Philips new audio CD recorder. Though technically not a new introduction—it has been available at a few select retailers since the fall—it will be distributed to mainstream electronics retailers during the coming year. The recorder allows home users to make their own CDs, which will have all the features and quality of professionally produced discs. To prevent unregulated disc duplication, the player supports the various international copy-protection agreements.

In the midst of all of this future technology, there were also a few islands of



USING PLASMA-DISPLAY TECHNOLO-GY, large screen flatTVs like this unit from Philips have finally become a reality.



PRESIDENT CLINTON is seen here holding a prototype V-Chip board. Tri-Vision will be offering add-on V-Chip units designed to work with existing sets.

nostalgia. A couple of companies exhibited specialty radios with a distinctly antique look. One even sported an antique name—Crosley Radio.

A few noteworthy technologies were also on exhibit off the main floor. One company, NUWAVE, was demonstrating its video-processing technology in a suite at the Riviera Hotel. That technology, already available in a standalone processor aimed at the professional market, improves image clarity, color, contrast, and brightness. Particularly striking was the fact that the processor can increase an image's apparent dynamic range-deeper black levels can be set without affecting the white levels of the image. From a viewer's point of view, that means that details can be brought out of shadows or dark areas without adversely affecting the rest of the image. Among the plans discussed were a possible mass-market consumer product and the availability of the technology on an ASIC IC for OEMs. Shortly after the show's end, NUWAVE announced that they had signed an agreement with Thomson (manufacturers of RCA, GE, and ProScan sets) to include their videoprocessing ASIC in that company's future products.

On the computer side, Microsoft had

a major presence at this year's show as it launched its Windows CE 2.0 operating system. One application for the new OS is in Palm computers, and several manufacturers announced units that made use of it. For more on that, see "Computer Connections" elsewhere in this issue of Electronics Now.



WHEN MICROSOFT TALKS about its "Windows Everywhere" philosophy, they mean what they say as evidenced by this Auto PC that runs on the new Windows CE 2.0 operating system.

However, Palm computers are not the only application for CE 2.0. There is perhaps no better demonstration that Microsoft meant what it said with its "Windows Everywhere" philosophy than the Auto PC.

The Auto PC is an in-dash automo-

tive computing system. Built around the CE 2.0 platform, Auto PC adds speechrecognition technology, a visual interface, and other car-oriented features to create "an information and entertainment device" for the automobile. An Auto PC unit can be used to send and receive e-mail, dial a cell phone, locate and/or navigate to a location, obtain weather and traffic information, and control the car's entertainment system (radio, CD, etc.). Through the use of speech recognition, all of that could be accomplished without the driver taking his hands off the wheel or his eyes off the road.

Get The Big Picture

ince at least the 1950s, researchers have said that a practical largescreen, flat, wall-hanging TV display was about ten years away. Well, after nearly a half-century, those ten years have finally passed. At the just concluded CES, nearly every manufacturer of TVs showed some type of large-screen (typically 42-inches diagonal measure, 16:9 aspect ratio) flat-panel TV. While some remain prototypes, several manufacturers plan to ship units this year, with at least one scheduled to be on the market by the time you read this. For more information on those, see "On the Floor at CES" elsewhere in this installment of "Prototype." In this article, we will be looking at the technology that has made those flat TVs finally a reality.

Flat Panel Technology

There are four technologies that can be used to create a large, flat display. Those are summarized in Fig. 1.

The first is the LCD (liquid crystal display). LCDs have the ability to change the light transmission coefficient



FUJITSU'S PLASMAVISION 42EP is a second-generation, DC, PDP flat-panel display that is now commercially available. It carries a suggested price of \$10,999.

of a liquid crystal. Generally, small fluorescent lamps are placed behind the screen to serve as a backlight. The strength of the light transmitted from the backlight is modulated to display text, graphics, and other information. Today LCDs are mass produced in sizes of several inches to well over ten inches for use in small television sets, word processors, and personal computer terminals. TFT-LCDs have TFTs (thin film transistors) on every picture element (pixel) for excellent image reproduction. The drawback to this technology is that the displays are complex devices, and making them requires every bit as much precision as manufacturing PDPs are best imagined as a huge number of tiny fluorescent lamps squeezed between two sheets of glass. PDPs have the advantage of simplicity of structure, which makes them a practical choice even for screens of more than 40 inches, and because they are based on the light emitted by phosphors, they are easy to colorize to achieve natural-looking color reproduction.

The third choice is the FED (field-emission display). FEDs have a large number of field-emission cathodes arrayed on a plane. Those cathodes emit electron beams that excite phosphors. The technology was made possible by advances in semiconductor technology

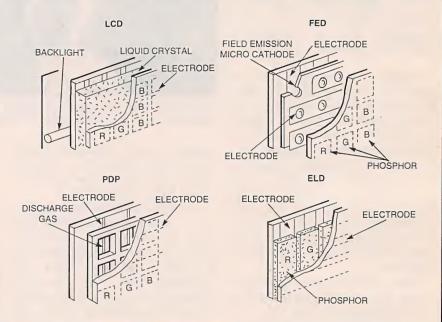


FIG. 1—FOUR POSSIBLE TECHNOLOGIES that could be used to manufacture a large-screen, flat-panel display. Of the four, the PLD and the LCD are the most feasible using current technology.

integrated circuits. Because of that, it is currently impractical, both in terms of technology and production investments, to manufacture anything much larger than a 40-inch LCD panel.

The second option is the PDP (plasma display panel). In a PDP, a panel of microscopic plasma-discharge cells are closely arrayed along vertical and horizontal axes. PDPs work under the same principle as fluorescent lamps. Information is displayed by adjusting the duration of the discharge by controlling the electrodes of every single cell. An electrical discharge generates ultraviolet waves that excite phosphors. Perhaps

to the point that the field-emission cathodes can be miniaturized to the micron level. Still, there are many hurdles to be overcome before the technology becomes practical, chief among them being the development of a practical field-emission cathode and the development of fabrication technologies suited to large displays.

The fourth option is the ELD (electroluminescent display). The ELD takes advantage of a phenomenon known as electroluminescence that occurs when a strong electric field is applied to a phosphor. Ten-inch ELDs emitting yelloworange light are already on the market,

New Web Site! Visit our new web site at Preview a sample from one of our Visit the bookstore, order a free catalog & much more!

LEARN A SKILL YOU ENJOY... THEN FIND A JOB THAT HAS A FUTURE.

Everyone has to start somewhere.

As 150,000 CIE graduates have discovered, independent-

study from The Cleveland Institute of Electronics can get you were you want to be. In a secure,



Industrial Robotics

financially rewarding, exciting career field of your choice.

Since 1934, CIE has been on the forefront of an ever expanding technological revolution ment. CIE's curriculum is unique from other independent-study schools in the respect that we not only provide hands-on training utilizing today's technology we also instill the



Project Engineer

knowledge and understanding of why technology works the way it does. This is the foundation upon which every CIE graduate can trace their success back to and in which CIE's reputation as a quality learning facility is based on.

Independent study is not for everyone. But, if you have the desire, the basic intellect and the motivation to succeed, CIE can make it happen. Our learning program is patented and

each lesson is designed for independent study while our instructors are available to assist you whenever you feel you



Telecommunications

need help. In fact, CIE's curriculum is so well respected many Fortune 1000 companies utilize it for their own employees.

CIE offers personalized training to match your back-ground with over ten career courses, an Associate Degree Program and a Bachelor Degree Program through our affiliation with World College. And every CIE graduate got

started

in a successful career the same way you can...by sending for your free CIE course catalog and judging for yourself if CIE's for you.



Computer Programming

START HERE...



Electronics

Back then it was radio and TV, today it's computer technology, programming and the electronics that make it all possible. Today and yesterday's similarities are

uncanny... Employers are looking for qualified applicants to hire and having a hard time finding them.

Students at CIE receive the training and the education needed to get hired and to succeed in challenging fields such as computer programming, robotics, broadcast engineering, and information systems manage-

Please send me more information on:

- CIE's Associate Degree Program
- CIE's Computer Programming Course
- ☐ CIE's 12 Career Courses
- ☐ World College's Bachelor
 Degree Program

 AE12

Name _____

Address _____

City______ Zip_____

Phone:

Check for G.I. Bill Details

☐ Active Duty ☐ Veteran

|||¢ie

It's More Than Just Training...
...It's an Education.

1776 East 17th Street Cleveland, OH 44114 (216) 781-9400 • 1-800-243-6446




FIG. 2—INSIDE A DC PLD. By adding auxiliary cells and by adding extra green cells, developers have improved image quality to the point where it is suitable for HDTV use.

and there has recently been a surge in research on electroluminescent materials able to give off the three primary colors with high levels of brightness and luminance. Some manufacturers have even created prototypes of small multicolor displays. Application to larger screens will, however, require improvements in brightness and luminance.

Among all of these possible technologies, the ones most practical for large-screen displays using present-day technology are LCDs and PDPs. However, as discussed above, while LCDs are commonly used in small-screen applications, such as in portable computers, there are many technological and cost hurdles in creating a practical large-screen LCD display.

One possible way around those problems might be a hybrid technology called PALC (plasma addressed liquid crystal) that combines the two. In a PALC, an LCD layer is placed on top of a PDP. The "plasma addressing" plays the same role as transistor switching for TFT-LCDs; when the plasma discharges, the same thing occurs as if the transistor switch were shut. That enables the transmission coefficient of the liquid crystal to be changed and therefore the brightness to be regulated.

PALCs require a backlight just as conventional LCDs do. However, they do not require large numbers of transistors formed over a large surface, so they are potentially viable for larger screens. Unfortunately, they also suffer from the LCD's most characteristic problem—

the brightness and contrast differs depending upon the viewing angle. Solving that problem will be essential for the technology to catch on. Still, the technology is promising enough for three major manufacturers—Sharp, Sony, and Philips—to join forces to develop a practical set, and Sharp demonstrated a prototype PALC at CES.

That said, the technology most manufacturers are turning to is the PDP, and aside from the Sharp PALC, every large-screen flat-panel display shown at CES was of that type. Let's look a little more closely at the PDP.

Inside the PDP

PDPs come in two varieties, AC and DC. In the AC version, the electrode is covered by the dielectric layer and operated with alternating current. The AC PDP has the advantages of structural simplicity, easy fabrication, and lower production costs, and their screens provide almost as much detail as conventional televisions. But while they are bright enough, they still have problems with contrast and with picture quality when moving images are displayed.

The DC version exposes the electrode to the discharge space and operates under direct current. Let's look at it in more detail (see Fig. 2).

Getting a clear picture out of a PDP requires that all of the display cells discharge in a stable manner. In practical terms that requires that display cells produce other stable discharges in addi-

tion to those for the display of information (display discharges). Those are called "auxiliary discharges," and without them the screen looks like a fluorescent lamp when it is first turned on, blinking and flickering erratically. However, because the PDP has stable auxiliary discharges taking place within its display cells, fluorescent light is being generated even during dark scenes, resulting in a lack of contrast. The brightness and darkness of the screen is controlled by changing the discharge duration of individual cells, but when fast movements are displayed, the picture quality rapidly deteriorates—faces take on lines that make them look like the contour lines on maps.

The DC PDP gets around those problems by adding auxiliary cells that do nothing but produce the auxiliary discharges, thereby preventing any declines in contrast. The developers also rethought the entire concept of using discharge duration to control brightness, with a marked improvement in picture quality especially for fast movement. They have tinkered with cell arrangement as well. Display cells are typically arranged with one cell of red, another of green, and another of blue in a horizontal formation. Green, however, plays a large part in screen sharpness, so the developers have put one cell of green after each cell of the other two colors. That arrangement of green cells has improved display resolution to the point where it is suitable for Japan's Hi-Vision (HDTV) broadcasts.

Still, despite the excitement from some display manufacturers, there are serious hurdles that must be overcome if PDPs are to be accepted in the public's living rooms. One huge one is cost. Pricing for the first units is high, running in the low to mid five figures. It is reasonable to expect those costs to go down with time, but for that to happen will require improvements in the panel production processes, an increase in the yield of the panels that can be used, and improvements in the drive circuit (which is costlier because it uses a higher operating voltage than LCDs). One industry spokesman predicted a cost of \$100/inch in a few years. That means that a 42inch PLD display would cost a still-high \$4200.—PORTIONS BY NISHIZAWA TAIJI, COURTESY LOOK JAPAN (SEPTEMBER 1997)

Electronics Now, May 1998

RETAILERS THAT SELL OUR MAGAZINE MONTHLY

California

California Electronics 221 N. Johnson Ave. El Cajon, CA 90202

Ford Electronics 8431 Commonwealth Avenue Buena Park, CA 90621

All Electronics 14928 Oxnard Street Van Nuys, CA 91411

Gateway Electronics of CA 9222 Chesapeake Drive San Diego, CA 92123

Mac's Electronics 191 South "E" Street San Bernardino, CA 92401

Electronics Warehouse 2691 Main Street Riverside, CA 92501

Orvac Electronics 1645 E Orangethorpe Ave. Fullerton, CA 92631

Sav-On Electronics 13225 Harbor Blvd. Garden Grove, CA 92643

JK Electronics 6395 Westminster Blvd. Westminster, CA 92683

Kandarian Electronics 1101 19th Street Bakersfield, CA 93301

Whitcomm Electronics 105 W. Dakota #106 Clovif, CA 93612

Minuteman Electronics 37111 Post St., Suite 1 Fremont, CA 94536 HCS Electronics 6819 S. Redwood Drive Cotati, CA 94931

Halted Specialties Co. 3500 Ryder Street Santa Clara, CA 95051

Metro Electronics 1831 J Street Sacramento, CA 95814

HSC Electronics 4837 Amber Lane Sacramento, CA 95841

Colorado

Gateway Electronics of CO 2525 Federal Blvd. Denver, CO 80211

Centennial Electronics 2324 E. Bijou Colorado Sps., CO 80909

Connecticut

Cables & Connectors 2198 Berlin Turnpike Newington, CT 06111

Electronic Service Prod. 437 Washington Avenue North Haven, CT 06473

Georgia

Norman's Electronics, Inc. 3653 Clairmont Road Chamblee, GA 30341

Illinois

Tri State Elex 200 W. Northwest Hwy. Mt. Prospect, IL 60056

Kansas

Electronic Hobby Shop 309 E. McKay Frontenac, KS 66763

Maryland

Mark Elec. Supply Inc. 5015 Herzel Place Beltsville, MD 20705

Amateur Radio Center 1117 West 36th Street Baltimore, MD 21211

Massachusetts

U-Do-It Electronics 40 Franklin Street Needham, MA 02194

Michigan

Purchase Radio Supply 327 East Hoover Avenue Ann Arbor, MI 48104

Norwest Electronics 33760 Plymouth Road Livonia, MI 48150

The Elec. Connection 37387 Ford Road Westland, MI 48185

Elec. Parts Specialists 711 Kelso Street Flint, MI 48506

Minnesota

Acme Electronics 224 Washington Avenue N. Minneapolis, MN 55401

Missouri

Gateway Electronics Of MO 8123-25 Page Blvd. St. Louis, MO 63130

New Jersey

Lashen Electronics Inc. 21 Broadway Denville, NJ 07834

New York

R&E Electronics 4991 Rt. 209 Accord, NY 12404

Unicorn Electronics Valley Plaza Johnson City, NY 13790

Ohio

Philcap Electronic Suppliers 275 E. Market Street Akron, OH 44308

Oregon

Norvac Electronics 7940 SW Nimbus Avenue Beaverton, OR 97005

Taztronics 257 N. Wasson St. Coos Bay, OR 97420

Pennsylvania

Business & Computer Bookstore 213 N. Easton Road Willow Grove, PA 19090

Texas

Mouser Electronics 958 N. Main Street Mansfield, TX 76063

Tanner Electronics 1301 W Beltine Carrollton, TX 75006

Electronic Parts Outlet 3753 B Fondren Houston, TX 77063

Electronic Parts Outlet 17318 Highway 3 Webster, TX 77598

Washington

Amateur Radio Supply Co. 5963 Corson Ave., Ste 140 Seattle, WA 98108

If you'd like to sell our magazine in your store, please circle 210 on Free Information Card.

EQUIPMENT REPORT

FLUKE MODEL 77 III DMM

Fluke's 77 Series III DMM brings a fresh new look to the world of multimeters.

CIRCLE 15 ON FREE INFORMATION CARD



n terms of appearance, not much has changed over the years when it comes to common digital multimeters, or DMMs. Show any technician or experienced hobbyist any DMM from just about any manufacturer, and he or she will be instantly able to use it. That's because, for the most part, just about all DMMs look and work the same.

Why? Well, for one thing, most of the advances in meter technology have centered around performance and features, with styling, ergonomics, and the user interface taking a back seat for the most part. Besides, to most manufacturers it likely seems to make sense not to mess with a good thing.

It takes guts for a major manufacturer to change something that people are accustomed to, like the elimination of tail fins from cars in the early 1960s or the transition from analog multimeters to digital ones-customers just might not accept something that's new and different. That's why Fluke's move to change the design of a basic multimeter is a bold one. However, after having the opportunity to use one of the redesigned meters, this reviewer feels it is one that should be embraced by technicians worldwide. Fluke's 70 Series III and 20 Series III Digital Multimeters have a bold, new design that sets them apart from DMMs of the past and paves the way for more unusual designs in the future.

Electronics Now took a look at Fluke's model 77 III multimeter, a \$179

DMM with a unique design that tapers down at the bottom making it easier to hold, especially for people with small hands. It also sports what Fluke calls an overmolded case. Fluke has basically taken the rubber holster that's been used on upscale DMMs in the past, and permanently fused it to the harder plastic case in what must be a really neat process. The result is a sleek multimeter with permanent cushioning around its outer surfaces. Fluke is confident that the meter is well protected because it's backed by a lifetime warranty. As long as the original purchaser owns it, Fluke will repair or replace it according to specified terms.

Anti-skid rubber feet, the same color as the case, are fused to the back of the meter-it's hard to see that they're there, but you can feel them and they do prevent the meter from sliding around while lying on a workbench or another surface. Making the outer cushioning a permanent part of the meter yields a slimmer, lighter instrument that's easier to work with. A flip-out hook on the back of the meter can be used to attach the meter to a vertical rod or cable, and there's a flip-out stand as well. The meter is 73/8 inches tall, 31/2 inches wide at the top, 23/4 inches wide at the bottom, and 13/8 inches high. It comes with a pair of rugged, non-slip, "rubberized" test leads.

The 77 III

High voltage is tough on a meter, but

Fluke's 77 III DMM can take it. It has overvoltage protection against spikes up to 6 kilovolts—the meter is even safe if it's accidentally set to measure ohms. Model 77 III is IEC 1010 safety rated. This standard defines four overvoltage categories based on the magnitude of danger. The meter is rated for 6 kilovolts CAT I, 1000 volts CAT II, and 600 volts CAT III. The current inputs are fuse-protected.

The high-contrast LCD has been made 40% larger, with four digits measuring ⁵/₈-inches tall. The display has an analog bargraph along its bottom edge. A single rotary knob in the center of the meter is used to select the operating mode. The meter defaults to autorange mode, which can easily be overridden by pressing a Range button. A Touch-Hold mode automatically captures the measurement, beeps, and locks it on the display for later viewing.

Measurements for the 77 III DMM include AC and DC voltage up to 1000 volts, DC millivolts, resistance up to 32 megohms, and AC and DC current up to 10 amperes continuous. There's also a diode and audible continuity test.

A lot of unusual accessories are available from Fluke. Those include pingrabber hooks, large-jaw alligator clips, an insulation piercing clip, industrial test leads, flexible straight test leads, an infrared temperature probe for noncontact temperature measurements, a thermocouple module, an immersion probe for liquids and gels, a stainless-steel piercing probe suitable for food service, an exposed probe for air and gas measurements, a pipe-clamp temperature probe, and more. Fluke is obviously prepared to take technicians into the next millennia with its new line of DMMs.

For more information on the model 777 Series III DMM, contact Fluke directly (Fluke Corporation, P.O. Box 9090, Everett, WA 98206; Tel: 800-44 FLUKE; Web: www.fluke.com), or circle 15 on the Free Information Card.

May 1998, Electronics Now

CD Information Storage and Playback

EFORE WE CAN GET INTO THE NITTY-GRITTY OF REPAIRING A CD PLAYER OR CD-ROM DRIVE, WE NEED A

LITTLE MORE INFORMATION ON HOW CD INFORMATION STORAGE

AND PLAYBACK WORKS, LET'S TACKLE THAT NEXT.

The actual information to be recorded on a CD undergoes a rather remarkable transformation as it goes from raw audio (or digital data) to microscopic pits on the disc's surface. For commercial or professional audio recording, the process starts with pre-filtering to remove frequencies above 20 kHz. It continues with analogto-digital conversion, usually at a sampling rate of 48K samples/second for each stereo channel. The resulting data stream is then recorded on multi-track digital magnetic tape. All mixing and pre-mastering operations are done at the same sampling rate. The final step is conversion through re-sampling (sample-rate conversion including sophisticated interpolation) to the 44.1K samples/second rate actually used on the CD (88.2K total for both channels). (In some cases, all steps may be performed at the 44.1 K rate.) That is followed by sophisticated coding of the resulting 16-bit "two's-complement" samples (alternating between L and R channels) for the purpose of error detection and correction. Finally, the data is converted to a form suitable for the recording medium by Eight-to-Fourteen modulation (EFM) and then written on a master disc using a precision laser cutting lathe. A series of electroplating, stripping, and reproduction steps then produce multiple "stampers," which are used to actually press the discs you put in your player. Of course, it is possible to create your own CDs with a modest priced CD-R recorder (which does not allow erasing or re-

recording), and now with re-writable CD technology with fully reusable discs that allow editing similar to what can be done using cassette tape.

Like a phonograph record, the information is recorded in a continuous spiral. However, with a CD, that track (groove or row of pits—not to be confused with the selections on a music CD) starts near the center of the CD and spirals counterclockwise (when viewed from the label side) toward the outer edge. The readout is through the 1.2 mm polycarbonate disc substrate to the aluminized information layer just beneath the label. The total length of the spiral track for a 74-minute disc is over 5000 meters—which is more than 3 miles in something like 20,000 revolutions of the disc!

The digital encoding for error detection and correction is called the Cross Interleave Reed Soloman Code, or CIRC. To describe that as simply as possible, the CIRC consists of two parts: interleaving of data so that a dropout or damage will be spread over enough physical area (hopefully) to be reconstructed and a CRC- (Cyclic Redundancy Check) like error-correcting code. Taken together, those two techniques are capable of some remarkable error correction. The assumption here is that most errors will occur in bursts as a result of dust specs, scratches, or imperfections such as pinholes in the aluminum coating, etc. For example, the codes are powerful enough to totally recover a burst error of greater

than 4000 consecutive bits—about 2.5 mm on the disc. With full error correction implemented (that is not the case with every CD player), it is possible to put a piece of 2-mm tape radially on the disc or to drill a 2-mm hole in the disc, and have no audio degradation. Some test CDs have just this type of defect introduced deliberately.

Two approaches are taken with uncorrectable errors: interpolation and muting. If good samples surround bad ones, then linear or higher-order interpolation might be used to reconstruct the bad samples. If too much data has been lost, the audio is smoothly muted for a fraction of a second. Depending on where those errors occur in relation to the musical context, even such drastic measures might be undetectable to the human ear.

Note that the error correction for CD-ROM formats is even more involved than for CD audio as any bit error is unacceptable. That is one of many reasons why it is generally impossible to convert an audio CD player into a CD-ROM drive. However, since nearly all CD-ROM drives are capable of playing music CDs, much can be determined about the nature of a problem by first testing a CD-ROM drive with a music CD.

Compact Disc Construction

As the following discussion proceeds, we will be expanding on some of the concepts introduced above.

The information layer uses "pits" as the storage mechanism. Pits are depressions less than 0.2 μ m (1 μ m = 0.001 mm = 0.000001 meter = 1/25,400 of an inch) in depth (1/4-wavelength of the 780-nm laser light, taking into consideration the actual wavelength inside the polycarbon-

ate plastic). Thus, the reflected beam is 180 degrees out of phase with incident beam making for high-contrast edges and good signal-to-noise ratio. Everything that is not a pit is a "land". Pits are about 0.5-μm wide; their length varies with the information content—with each bit being represented by a 0.278-μm increment.

Each byte of the processed information is converted into a 14-bit runlength-limited code taken from a code book (lookup table) such that there are no fewer than two or more than ten consecutive 0s between 1s. By then making the 1s transitions from pit to land or land to pit, the minimum length of any feature on the disc is no less than 3P and no more than 11P, where P is 0.278 µm. This is called Eight-to-Fourteen Modulation—EFM. Thus the length of a pit ranges from 0.833 to 3.054 µm.

Each 14-bit code word has 3 additional sync and low-frequency-suppression bits added, for a total of 17 bits representing each 8-bit byte. Since a single bit is $0.278 \mu m$, a byte is then represented in a linear space of $4.72 \mu m$. EFM in conjunction with the sync bits assures that the average signal has no DC component and that there are enough edges to reliably reconstruct the clock for data readout. These words are combined into 588-bit frames (see Table 1). Each frame con-

tains 24 bytes of audio data (6 samples of L+R at 16 bits) and 8 bits of information used to encode (across multiple frames) information like the time, track, index, etc.

A block, which is made up of 98 consecutive frames, is the smallest unit that can be addressed on an audio CD and corresponds to a time of 1/75 of a second. Two bits in the information byte of each frame are currently defined. These are called P and Q. P serves a kind of global sync function, indicating start and end of selections, time in between selections, and so forth. The 98 Q bits of each block encode the time, track and index number, as well as many other possible functions depending where on the disc it is located, what kind of disc it is, and so forth.

Information on a CD is recorded at a Constant Linear Velocity—CLV. That is both good and bad. For CD audio at 1× speed, this CLV is about 1.2 meters per second. (It really isn't quite constant—due to non-constant coding packing density and data buffering—but instead varies between about 1.2 and 1.4 metersper-second). CLV permits packing the maximum possible information on a disc since it is recorded at the highest density regardless of location.

However, for high-speed access, particularly for CD-ROM drives, it means there is a need to rapidly change the speed of rotation of the disc when seeking between inner and outer tracks. Of course, there is no inherent reason why, for CD-ROMs, the speed could not be kept constant meaning that data transfer rate would be higher for the outer tracks than the inner ones. Modern CD-ROM drives with specs that sound too good to be true (and are), may run at constant angular speed achieving their claimed transfer rate only for data near the outer edge of the disc.

Note that unlike a turntable, the instantaneous speed of the spindle is not what determines the pitch of the audio signal. For one thing, there is extensive buffering in RAM inside the player. That buffering is used as a FIFO to smooth out data read off of the disc to ease the burden on the spindle servo, as well as to provide temporary storage for intermediate results during decoding and error correction. Pitch (in the music sense) is instead determined by the data readout clock—usually a crystal oscillator which controls the D/A and LSI chip-set timing. The only way to adjust the player's pitch is to vary that clock. Some high-end players include a pitch adjustment that does just that.

Since the precision of the playback of a CD player is determined by a high-quality quartz oscillator, wow and flutter—key measures of the quality of phonograph turntables—are so small as to be undetectable. Ultimately, the sampling frequency of 44.1K samples-persecond determines the audio output. For this, the average bit rate from the disc is 4.321M bits-per-second.

Tracks are spaced 1.6-µm apart—a track pitch of 1.6. Thus, a 12-cm disc has over 20,000 tracks for its 74 minutes of music. Of course, unlike a hard disk and like a phonograph record, it is really one spiral track over 3 miles long! (However, as noted above, the starting point is near the center of the disc.) Compare that to an LP record: A long long-playing LP might have a bit over 72 minutes of music on two sides, or 36 minutes per side. (Most do not achieve anywhere near this much music since the groove spacing needs to vary depending on how much bass content the music has; bass requires wider grooves, and wide grooves occupy more space.) At 33-1/3 rpm, this is just over 1200 grooves in about 4 inches compared to 20,000 tracks on a CD in a space of just over 1.25 inches! The readout styles for an LP has a tip radius of perhaps 2 to 3 mils (50 to 75 µm)

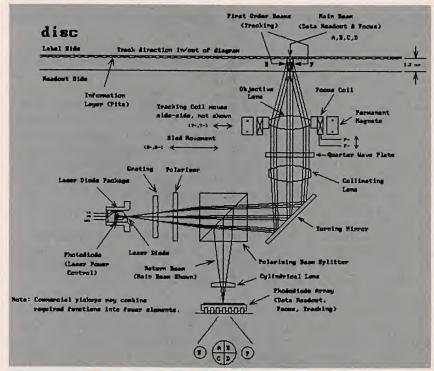


FIG. 1—HOW A TYPICAL THREE-BEAM PICKUP WORKS. Though there are many variations on this design, all pickups work in a similar fashion.

compared to 1 µm for the focused laser beam of a CD player!

At a constant linear velocity of about 1.2 meters per second, the required tracking precision is astounding. To put the required CD player servo-system performance into perspective, here is an analogy: Proper tracking of a CD is equivalent to driving down a 10-footwide highway (assuming an acceptable tracking error of less than +/-0.35 µm) for more than 3200 miles for one second of play, or over 14,400,000 miles for the entire disc without accidentally crossing lanes! And you thought that driving on a narrow winding country road was pretty tough!

Actually, it is worse than that: Focus must be maintained all this time to better than 1 µm as well (say, +/-0.5 µm). So, it is more like piloting a aircraft down a 10foot-wide flight path at an altitude of about 12 miles (4 mm (typical) focallength objective lens) with an altitude error of less than +/-7 feet while the target track below you is moving both 1 mile horizontally (CD and spindle runout of 0.35 mm) and 3 miles vertically (disc warp and spindle wobble of up to 1 mm) per revolution! In addition, you are trying to ignore various types of garbage (smudges, fingerprints, fibers, dust, etc.) below you, which on this scale have mountain-sized dimensions. (Sorry for the mixed units, and my apologies to the rest of the world where the proper units are used for everything.)

The required precision seems unbelievable, but is just another day in the entertainment center for the CD player's servo systems. Even more surprising, this level of precision is achieved using massproduced technology that dates to the late 1970s. And, don't forget that a properly functioning CD player is remarkably immune to small bumps and vibration more so than an old style turntable.

Of course, we better hope that our technological skills are never lost-a phonograph record can be played using the thorn from a rosebush and a potter's wheel for a turntable. As you can see, there's just a bit more technology needed to read and interpret the contents of a CD!

Optical-Pickup Principles

The purpose of the optical pickup in a CD player, CD-ROM drive, or opticaldisk drive, is to recover digital data from the encoded pits at the information layer of the optical medium. For CD players,

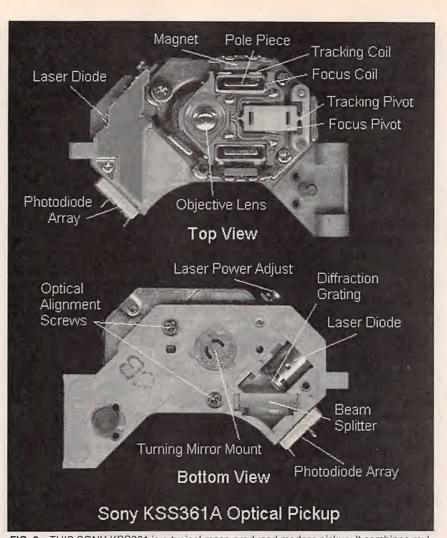


FIG. 2—THIS SONY KSS361 is a typical mass-produced modern pickup. It combines multiple functions into fewer distinct parts, resulting in improved robustness and lower cost.

the resulting data stream is converted into high-fidelity sound. For CD-ROMs or other optical-storage devices, it might be interpreted as program code, text, audio or video multimedia, color photographs, or other types of digital data.

The following (simplified) description of an optical pickup assumes a threebeam device—the most common type. A diagram of the pickup we will be discussing is shown in Fig. 1. To accomplish the same objectives, many variations on this design-such as a single-beam pickup-are possible. In addition, modern mass-produced pickups like the very common Sony KSS361A model shown in Fig. 2 combine multiple functions into fewer distinct parts. The result is improved robustness and lower cost. However, most of the basic operating principles are similar.

It is often stated that the laser beam in a CD player is like the stylus of a phonograph turntable. While this is a true statement, the actual magnitude of

TABLE 1			
Sync Control and Display Data Error Correction	$\begin{array}{l} (24+3) \\ (14+3) \\ (12\times2\times(14+3)) \\ (4\times2\times(14+3)) \end{array}$		
Total Bits/Frame	588		

this achievement is usually overlooked. Consider that the phonograph stylus is electromechanical. Stylus positioninganalogous to tracking and focus in an optical pickup—is based on the stylus riding in the record's grooves and controlled by the suspension of the pickupcartridge and tone arm. The analog audio is sensed most often by electromagnetic induction produced by the stylus's minute movements wiggling a magnet within a pair of sense coils.

The optical pickup, on the other hand, must perform all of those functions without any mechanical assistance from the CD. It is guided only by a fraction-of- 25 a-mW of laser light and a few milligrams of silicon-based electronic circuitry. Furthermore, the precision involved is easily more than two orders of magnitude finer than that required for a phonograph. Sophisticated servo systems maintain focus and tracking to within a fraction of a micrometer of optimal. Data is read out by detecting the difference in depth of pits and lands of 1/4-wavelength of laser light (about 0.15 µm in the CD)!

The laser beam is generated by a solid-state laser diode emitting at 780 nm (near IR). Optical power from the laser diode is no more than a couple of mW and exits in a wedge-shaped beam with a typical divergence of 10 × 30 degrees in the X and Y directions, respectively. A diffraction grating splits the beam into a main beam and two (first-order) side beams. (The higher-order beams are not used.) Note that the diffraction grating is used to generate multiple beams, not for its more common function of splitting up light into its constituent colors. The side beams are used for tracking and straddle the track that is being read. The tracking servo maintains this centering by keeping the amplitude of the two return beams equalized.

Next, the laser beam passes through a polarizing beam splitter (a type of prism or mirror that redirects the return beam to the photodiode array), a collimating lens, a quarter-wave plate, a turning mirror, and the objective lens before finally reaching the disc.

The collimating lens converts the diverging beam from the laser into a parallel beam. A turning mirror (optional, depending on the specific optical path used) then reflects the laser light up to the objective lens and focus/tracking

The objective lens is similar in many ways to a high-quality microscope objective lens. It is mounted on a platform that provides for movement in two directions. The actuators operate similarly to the voice coils in loudspeakers. Fixed permanent magnets provide the magnetic fields that the coils act upon. The focus actuator moves the lens up and down. The tracking actuator moves the coil in and out with respect to the disc center. The collimated laser beams (including the 2 side beams) pass through the objective lens and are focused to diffraction-limited spots on the information-pits layer of the disc (after passing through the 1.2 millimeters of clear polycarbonate plastic 26 that forms the bulk of the disc).

The reflected beam retraces the original path up until it passes through the polarizing beam splitter, at which point it is diverted toward the photodiode array. (The polarizing beam splitter passes the horizontally polarized laser beam straight through. However, two passes-source and return-through the quarter-wave plate rotates the polarization of the return beam to be vertical instead, and it is reflected by the polarizing beam splitter toward the photodiode array.)

A cylindrical lens slightly alters the horizontal and vertical focal distances of the resulting spot on the photodiode array. The spot will then be perfectly circular only when the lens is positioned correctly. Too close or too far and the spot will be elliptical (e.g., elongated on the 45-degree axis if too close, and elongated on the 135-degree axis if too far). The main return beam from the disc's information layer is used for servo control of focus and tracking, and for data recovery. The actual implementation could use an astigmatic objective lens rather than a separate cylindrical lens to reduce cost, but the effect is the same. Since the objective lens is molded plastic, it costs no more to mold an astigmatic lens (though grinding the original molds might have been a treat!). It is even possible that in some cases, the natural astigmatism of the laser diode itself plays a part in this process.

In essence, the optical pickup is an electronically steered and stabilized microscope that is extracting information from tracks 1/20 the width of a human red blood cell while flying along at a linear velocity of 1.2 meters per second!

Now that you know everything (almost) there is to know about how CDs are made and work, we will wind up our theoretical discussion and go on to the good stuff, how to fix a player or a drive when it is broken. Tune in next time for our first CD troubleshooting segment. In the meantime if you have any problems or questions that just can't wait, go to my Web site at www.repairfaq.org. For questions to me, address them to me via e-mail at sam@stdavids.picker.com. (Note: While I would love to answer all your questions, regrettably, the finite number of microseconds in a day prevents me from being able to reply to letters sent via the postal service. However, I will respond to all e-mail requests in a timely manner—usually within 24 hours. Thanks for your understanding in this.)

See you next time.

COMPUTER CONNECTIONS

continued from page 11

forming (software) system upgrades;

- Provides instant-on; and
- Returns to previous activity on power-up.

All those things, and some that I've undoubtedly overlooked, are part of the user interface, the overall gestalt referred to above. All are things that people like us routinely handle, perhaps because the technical details are (or were initially) interesting to us, perhaps because it's part of our job description, or perhaps because we simply accept it as the price we have to pay to do what we really want to do. But what about the other 99.5% of humanity?

The Pilot doesn't do all the things listed. But it does most, in its small way. So what happens if the Pilot gets bigger, if it scales up, and maintains those attributes? That's why Microsoft is scared. That's why the race isn't over. That's why ideas like NetPCs and network computers are still compelling for some applications. They can present a focused, robust, reliable user interface—if not a universal one.

Microsoft and Intel are seemingly unassailable in their present positions. But Windows so far has failed as a PDA UI, and I have trouble seeing it as a "Toaster-User Interface," either.

1997 may well have been the beginning of the end for Wintel. There are chinks in the armor, some big enough to fly a space shuttle through, and the success of the Pilot shows that new platforms can thrive. Believe it or not, it is still possible that the market could eventually just discard Wintel as yet another stepping stone on the way to the future.

I don't think anyone doubts the ubiquity of computer technology in this future. But the precise shape of the technology is still to be determined. I am utterly certain, however, that bloated, slow, confusing, and vulnerable are not going to be attributes of this technology. To the extent that Wintel continues supplying products with those attributes, there is that much more opportunity for innovative new platforms.

Wintel could close the gaps before it's too late. But it may not. Time will tell.

We've closed out our sole-focus tutorial on PalmPilot programming for now. Though we'll be returning to the Palm-Pilot on occassion, it's time to explore some fresh topics, which we'll begin next time.



NEW PRODUCTS

USE THE FREE INFORMATION CARD FOR FAST RESPONSE

World-Wide Radio

THE IC-PCR1000 IS A "BLACK-BOX" communications device that transforms a personal computer into a high-quality wide-band communications receiver. Compatible with many different PC models, even laptops, the PCR-1000 connects to computers externally and offers both "band-scope" functions and exceptional receiver/scanner performance.

The device receives local radio and TV broadcasts, as well as shortwave broadcasts that carry data transmissions, news, music, and events from other

number of memory channels, grouped into banks of 50 channels each that can be stored on either the hard drive or on a floppy. Each memory stores frequency, receive mode, memory names, tuning steps, and attenuator and filter settings.

The size of a small hard-bound novel, this "black-box" receiver covers a wide frequency range from 0.01 to 1300 MHz, with all-mode receive capability, including WFM, FM, AM, SSB, and CW. The IC-PCR1000 has a suggested list price of \$599.



CIRCLE 20 ON FREE INFORMATION CARD

countries—such as BBC shows or rugby matches from Australia. In addition, PC users are able to listen to or "scan" public safety (fire, police, search and rescue), commercial, military, aircraft, and marine communications. For mobile reception, it can be used in a car simply by connecting it to a laptop and using the power from a 12-volt cigarette lighter.

Featuring three receiver-interface screens (a communications-receiver screen, a component-type screen, and a radio screen), it works while other programs are in use. There is an unlimited

ICOM AMERICA, INC.

2380 116th Ave., N.E. P.O. Box C-90029 Bellevue, WA 98009-9029 Tel: 425-454-8155 Fax: 425-454-1509 Web: www.icomamerica.com

Versatile Tester

A COMPACT, RUGGED, ALL-trade, general-purpose meter, the Model DM7 is designed for basic electronic and electrical troubleshooting, testing,



CIRCLE 21 ON FREE INFORMATION CARD

and measurement. Its small size $(5.5-\times 3.1-\times 1.6\text{-inches})$ makes it practical for portable testing anywhere: for field-service applications or as an easy-to-use meter for around the home, garage, or workshop.

Measurement capabilities of this DMM include AC voltage, DC voltage, DC current, resistance, and battery testing. Features of the DM7 include a 2000-count precision digital readout, AC/DC ranges to 600 volts, DC current to 200mA, four resistance ranges to 2 megohms, diode testing, and a quick battery tester for 1.5- and 9-volt batteries.

The Model DM7 digital multimeter comes with safety test leads and protective holster. It retails for \$29.95.

WAVETEK CORP.

9045 Balboa Avenue San Diego, CA 92123 Tel: 800-854-2708 or 619-279-2200 Fax: 619-565-9558 Web: www.wavetek.com


Differential Oscilloscope

PROVIDING THE BENEFITS OF A full-function analog, digital-storage, and differential oscilloscope, the Model 5034 30MHz Differential Oscilloscope is capable of measuring motor-control circuits, switching power, 3-phase power, and high common-mode voltages. It offers direct viewing of line voltages, safe from the hazards of "hot chassis" equipment.

The 5034 measures small signals superimposed on high AC or DC voltages by using one differential input to reference the common mode voltage. The instrument allows phase analysis of multi-phase systems. In the differential mode, full sensitivity is provided from 10mV/div to 200V/div.

Its dual-channel capability includes functioning as a dual-trace scope in the differential mode with full differential inputs on both channels and external trigger input. Among the features of the 5034 are digital refresh at 0.1 µs to 200s/div, 40-MHz sampling frequency, and sweep speed of 0.2 µs/div to 200ms/div in 1-2-5 sequence, 20 positions.

An RS-232 port enables hard copy and remote programming. It features 8K memory, autoset, and display cursors/readouts. Compact in size, the unit's 6-inch CRT display offers 8-bit (256-level) resolution. The 5034 is priced at \$2330.



CIRCLE 22 ON FREE INFORMATION CARD

B+K PRECISION

4353 West Lawrence Avenue Chicago, IL 60630 Tel: 773-725-9252 Fax: 773-725-9385 Web: www.bkprecision.com

Adjustable Soldering Iron

A COMPLETELY SELF-CONtained soldering iron, the Antex Model TCS Temperature-Controlled Soldering Iron features an adjustment screw on the handle for setting tip temperatures to the optimum heat level. The screw, which adjusts using a small screwdriver, can set the temperature from 390°F to 850°F with ±1% stability (typical).

Eliminating the need for a separate soldering station, this standard-size iron has a tapered plastic handle that fits the hand comfortably. It is well-suited for use in electronic assembly and field-service operations.

The Model TCS Soldering Iron has zero-voltage switching, heats up to 650°F in less than a minute, and provides rapid recovery time. A wide selection of slide-on tips is offered. There are two versions available: a 115-volt AC model and one for 24-volt power supplies. The Antex Model TCS Temperature-Controlled Soldering Iron lists for \$77.42.



CIRCLE 23 ON FREE INFORMATION CARD

M.M. NEWMAN CORPORATION

24 Tioga Way P.O. Box 615 Marblebead, MA 01945 Tel: 781-631-7100 Fax: 781-631-8887

Clip-On Notebook Video Camera

THIS COLOR VIDEO CAMERA that clips to a notebook's display and plugs into a PC-card slot can be used by laptop owners to create and send video e-mail and for videoconferencing. Unlike other portable cameras in its class, the Panasonic Clip-On Notebook Camera (model PM-S122) offers full-duplex sound for telephone-like audioconferencing.

It is one of the first complete, easyto-use videoconferencing systems designed for use with a laptop. Both camera and headset connect to an included conference card that plugs directly into any PCMCIA Type II slot. The headset includes earphone and adjustable microphone.

Measuring 3.1 by 1.7 by 1.2 inches, the camera is smaller than a business card. It produces images with a resolution of 542 × 497 and 300 TV lines. When clipped to the left side of a notebook's flip display, the camera swivels up to 40 degrees, and

tilts up to 120 degrees, making it easy to frame a subject's face. It includes an automatic gain control and automatic white balance for optimum color fidelity, and has an adjustable-focus lens.

The advanced compression techniques of the bundled software allows PM-S122 users to create and send A/V messages as e-mail attachments. Other included software allows real-time A/V communication between two or more people, via a standard phone line, the Internet, or over a LAN. System requirements are Windows 95 and a minimum of 16MB of memory. The PM-S122 Clip-On carries an estimated street price of \$549.



CIRCLE 24 ON FREE INFORMATION CARD

PANASONIC COMMUNICATIONS & SYSTEMS COMPANY

Two Panasonic Way
Secaucus, NJ 07094
Tel: 800-742-8086 or 201-348-7000
Web: www.panasonic.com/alive

Virtual Instruments

THE MISSION TECHNOLOGY PC-MultiScope2, from Amaze Electronics, when connected to a personal computer, can replace an entire lab of bench equipment. The device transforms any PC into a full-function digital storage oscilloscope, spectrum analyzer, strip-chart recorder, digital voltmeter, and adjustable DC power supply. With an optional module, it also serves as a function generator.

The PC-MultiScope2 is easy to install

The PC-MultiScope2 costs \$399.



CIRCLE 25 ON FREE INFORMATION CARD

AMAZE ELECTRONICS CORPORATION

4575 Grimsby Drive San Jose, CA 95130 Phone: 800-996-2008 Fax: 408-374-1737

E-mail: amaze@hooked.net

Web: http://www.hooked.net/users/amaze

Pint-Sized 103 CD-ROM Drives

ACCORDING TO ADDONICS Technologies, its PCMCIA PocketCD and Parallel PocketCD portable CD-ROM drives are smaller, lighter, and faster than any other product on the market. Each measures 5.5 by 5.3 by 0.7 inches and weighs 15 ounces. Average access time is 190 ms, average data-transfer rate is 1.5 MB/s (103), and maximum data transfer rate is 1.8 MB/s (123).

In the same space as two standard CD jewel cases, the PCMCIA PocketCD contains a 103-speed CD-ROM drive, internal rechargeable batteries, a PCM-CIA interface, a mini-headphone jack, and controls for audio CD playback. The device can be powered from a laptop computer's battery through its PCMCIA interface, through its batteries, or from an external power adapter (sold separately). A parallel interface is also available as an option. Designed for the mobile professional who needs access to his CD-ROM drive everywhere, the PCMCIA PocketCD can also be used as a portable



CD player.

The Parallel PocketCD, for people who want portability but primarily use their CD-ROM drive where line power is available, differs from its sibling in its power source and standard interface. This drive comes with an internal compartment for four "AA" batteries, a parallel-port interface, a mini-headphone jack, and controls for audio CD playback. A 5-volt power adapter is included.

The PCMCIA PocketCD and Parallel PocketCD have suggested retail prices of \$399 and \$349, with expected street prices of \$349 and \$299, respectively.



CIRCLE 26 ON FREE INFORMATION CARD

ADDONICS TECHNOLOGIES

48434 Milmont Drive Fremont, CA 94538 Tel: 510-438-6530 Fax: 510-353-2020 E-mail: Atc@addonics.com Web: http://www.addonics.com

Digital Triple-Output Power Supply

OFFERING DIFFERENT VOLTAGE and current outputs, the Model 1302B Triple Output constant-current /constant-voltage DC Power Supply by Global Specialties is designed for industrial and laboratory use. A fully-regulated power supply, it meets all DC voltage requirements. It is used for product development, analog-and digital-circuit design, product development, testing, quality control, servicing, and education.

The two main outputs are continuously variable from 0 to 32 volts and can each supply 2 amps maximum. They can be operated in constant-voltage or constant-current modes. In addition, a separate 5-volt output provides variable 4.5- to 5.5-volts DC power at 5 amps.

Separate front-panel meters are provided to monitor output voltage and load current for the 32-volt sections. Green LED digital displays make the meters easy to read. Switch selection enables either voltage or current monitoring for each section.

Automatic overload and short-circuit protection is built in. Additional protection is provided by the isolated design of the heavy-duty transformers.

The compact, fully solid-state instrument measures $9 \times 11.5 \times 5.5$ inches, and is priced at \$595.



CIRCLE 27 ON FREE INFORMATION CARD

GLOBAL SPECIALTIES

70 Fulton Terrace New Haven, CT 06512 Tel: 800-572-1028 or 203-466-6103 Fax: 203-468-0060

Serial Port for Your Laptop

ADDING B&B ELECTRONICS' 485PCC PCMCIA card to your laptop provides it with an RS-422/485 serial port. This single card can be configured for either an RS-422 orRS-485 port, and for high speed and normal communications.

The Type-II (5 mm) PCMCIA card is ideal for field-service representatives who work on numerous configurations. It features Automatic Send Data control, which handles RS-485 driver enable and disable functions transparently, allowing easy use with Windows 95 and software without RTS support. Users can also set the 485PCC to 4× clock mode, which allows baud rates up to 460.8K. A 16550UART offers high-speed communications with reduced CPU overhead. Pinouts of the 485 match the SMPTE video standard for controlling devices.



CIRCLE 28 ON FREE INFORMATION CARD

A simple configuration program is shipped with the card, and configuration options are stored in non-volatile memory. The 12-inch cable included with the card has a D89 male connector. The 485PCC PCMIA Serial Port Card is priced at \$159.95

B&B ELECTRONICS MANUFACTURING CO.

707 Dayton Road P.O. Box 1040 Ottawa, IL 61350 Tel: 815-433-5100 Fax: 815-434-7094 Web: http://www.bb-elec.com

Updated Schematic-Capture Software


VERSION 2.0 OF WINDRAFT Schematic Capture software from Ivex Design International features a new "Parts Palette" that allows the user to select up to 20 frequently used parts. The Palette appears on the screen next to the worksheet, where the user can just click on a part and then click on the sheet to place it. The user can scroll through the Palette with the standard Windows scroll bar. Parts can be easily added or deleted from the Palette. The user can even customize the order of the parts after they have been placed in the Palette.

Another new feature is the ability to import BMP graphic files, which can now be used to customize the title block with a logo or to import other graphic designs onto a worksheet. True-type fonts have been added throughout the program, including title block, pin numbers, references, values, and hierarchical sheet symbols. In past versions of WinDraft, true-type fonts were available only on comment text.

Editing functions have been revised to be more natural and to conform to the format used with the Ivex WinBoard PCB layout program. Single-click on an object to select and move; double-click to edit the characteristics. Now, with a single mouse-click, the user can insert or move a vertex, and quickly reroute wires or buses.

WinDraft 2.0 toolbars and dialog boxes have been totally redesigned to better organize information and setups. To help the less experienced user get a better understanding of the program, "tips of the day" has been included in the standard Windows start-up format. Tips 30 include answers to the most frequently asked questions about the product and shortcuts to commands.

The unlimited pin capacity version of WinDraft 2.0 costs \$495, and the 650-pin version costs \$240. Registered customers will be notified as to the upgrade cost. A free shareware version of either WinDraft or WinBoard can be obtained from the Web site listed below. The shareware versions are complete, fullyfunctional programs with a 100-pin/pad limitation and can be used to view any size design.



CIRCLE 29 ON FREE INFORMATION CARD

IVEX DESIGN INTERNATIONAL

15232 NW Greenbrier Parkway Beaverton, OR 97006-5746 Tel: 503-531-3555 Fax: 503-629-4907 E-mail: info@ivex.com Web: http://www.ivex.com.

Memory Emulators

OFFERING ENHANCED FEAtures, Scanlon Design Inc.'s E-Series emulates EPROM, FLASH, ROM, and static RAM memory devices from 8K×8-128K×8 (E1) to 8K×8-1024K×8 (E8). Live editing, live watches, and advanced debugging are featured in the emulators. The software lets the user see SRAM variables change and allows the editing of run-time data to force conditions and fully test embedded systems.

All the models provide reading and writing at full speed and simultaneous live viewing and editing from the host PC. Software debugging features such as memory-mapped bi-directional communication and third-party remote-debugger support allow the target system to pass debugging information back to the host PC. The E-Series also offers error checking and correction while downloading (420 kbps), has an access time of 70 ns, and draws a maximum current of only 5 mA from the target system,

These products feature simple hookup and connection for up to four emulators, multiple output signals for control of the target system, and memory backup for power-up emulation. Each emulator comes with 28- and 32-pin DIP adapters. Also available are 32-pin PLCC adapters, as well as low-voltage models that allow operation from 2.7 to 5.5V.

The E-Series emulators are priced from \$199 for the E1-70 to \$369 for the E8LV-90.



CIRCLE 30 ON FREE INFORMATION CARD

SCANLON DESIGN INC.

5224 Blowers Street Halifax, N. S. Canada B37 177 Tel: 800-352-9770 or 902-425-3938 Fax: 902-425-4098 E-mail: info@scanlondesign.com Web: www. scanlondesign.com

Wide-Band VCO

MINI-CIRCUITS' ITOS-1025 WIDEband VCO is a low-cost surface-mount, voltage-controlled oscillator. This highperformance VCO features a wide range of linear tuning (685-1025 MHz), -28 dBc harmonic suppression, and low -70 dBc/Hz SSB phase noise at 1 kHz offset (typical). Tuning voltage is 1-16 volts (absolute maximum is 20 volts).

This VCO is housed in a rugged metal case with solder-plated J leads for superior mechanical integrity. Uses include measurement instrumentation and PLL circuitry applications. The JTOS-1025 is priced at \$18.95 each (quantity 5-49), with immediate off-theshelf availability.



CIRCLE 31 ON FREE INFORMATION CARD

MINI-CIRCUITS

P.O. Box 350166 Brooklyn, NY 11235-0003 Tel: 718-934-4500 Fax: 718-332-4661 Web: http://www.minicircuits.com



NEW LITERATURE

USE THE FREE INFORMATION CARD FOR FAST RESPONSE

Home Satellite TV Installation and Troubleshooting Manual 5th Edition

by Frank Baylin with Brent Gale and Ron Long Baylin Publications 1905 Mariposa Blvd. Boulder, CO 80302 Tel: 800-483-2423

Web: www.baylin.com \$30 plus \$4 S & H



CIRCLE 338 ON FREE INFORMATION CARD

Written in a style that can be easily understood by an interested layman, this 326-page manual is an invaluable working tool designed to make selecting, installing, and maintaining large-dish satellite systems easy.

Largely rewritten and re-organized, this fifth edition of the book contains over 300 up-to-date illustrations, photographs, and tables, and includes background theory and details on how satellites and TVROs operate, as well as methods to select and judge satellite TV components.

There is a detailed step-by-step installation and dish-aiming guide with all the necessary charts and tables, thorough diagrams and text explaining conventional and IF multiple-receiver and multiple-television hookups, and methods to install unusually large dishes. In addition, readers are shown a complete strategy and details on troubleshooting any satellite TV system.

Complete explanations of the MPEG-2 digital television standard, video compression methods, IF distribution of satellite signals, and a brief overview of digital link analysis are presented. The appendix includes a useful collection of equations, a glossary, and a complete list of satellite equipment manufacturers, as well as reference books and magazines.

1998 Test & Measurement Accessories Catalog

ITT Pomona Electronics 1500 E. 9th Street Pomona, CA 91766-3835 Tel: 909-469-2900 Fax: 909-629-3317 Web: www.ittpomona.com

Free



CIRCLE 339 ON FREE INFORMATION CARD

This 50th anniversary catalog presents the full line of Pomona test and measurement accessories. A complete range of coaxial cable assemblies and adapters, patch cords, enclosures and

boxes, IC test clips for 2- and 4-sided devices, and static control products are among the items included in the 92-page catalog.

Highlighted are newly designed DMM accessories, a new family of highperformance oscilloscope probes, and the first IEC1010-compliant mini-grabber ever offered. The redesigned DMM accessories are featured in ITT Pomona's Test Companion Kits, which are compatible with Fluke, Hewlett-Packard, Tektronix, and Wavetek DMMs and oscilloscopes. The mini-grabber's slim-line design allows easier access with today's more-densely populated test situations. It is paired with a right-angle plug, a straight plug, a banana jack, a multi-stacking banana plug, or another mini-grabber to create eight distinct patch cords.

Also featured are ×1/×10 Passive Oscilloscope Probes offering dual-band-


To order books in this magazine or, any book in print. Please call anytime day or night: (800) BOOKS-NOW (266-5766) or (702) 258-3338 ask for ext. 1456 or visit on the web at http://www.BooksNow.com/electronicsnow.htm.

width performance for greater text flexibility, a ⁷/₁₆ DIN Adapter Kit improving intermodulation performance, and a push-on BNC 50-ohm cable.

Optoelectonic Packaging

Edited by Alan R. Mickelson, Nagesh R. Basavanhally, and Yung-Cheng Lee John Wiley and Sons, Inc. 605 Third Avenue
New York, NY 10158-0012
Tel: 212-850-6336

\$74.95



CIRCLE 340 ON FREE INFORMATION CARD

The rapidly expanding field of packaging for optoelectronic devices presents the engineer with complicated problems to solve. One major challenge is how to assemble an array with many elements efficiently, while

maintaining thermal tolerance and simultaneously overcoming electrical-noise problems. Designed for professionals in the field, *Optoelectronic Packaging* is the first source book available on optoelectronic-assembly techniques.

The book provides an overview of current state-of-the-art technologies, packages that are now on the drawing board, and the future direction of packaging. It also explains the fundamentals of optics and packaging.

Featuring contributions from expert practitioners in the field and numerous illustrations, the text covers the subject of assembly technologies. It explains detector, semiconductor laser, and optical-amplifier packaging. Waveguide and hybrid technologies are discussed. The book also examines communication-system interconnection structure and fiber-optic networks in telecommunications. Case studies of packaged subassemblies are also included.

\$39.95



CIRCLE 341 ON FREE

This book is the first to bring together over 100 shareware and public-domain diagnostics and utilities on a single disk: the DLS Diagnostic CD (included with the book). The book and CD combine to

give technicians a "Swiss army knife" of tools to aid in troubleshooting or upgrading computers.

Divided into nine chapters, the book explains why, when, and how to use these diagnostic programs. The first chapter gives an overview of the shareware. The subsequent six chapters give highlights of the programs: general PC hardware tools, video systems, printers and parallel-port tools, modem and communications tools, drive tools, and general support tools. The last two chapters discuss the commercial diagnostics included on the CD.

1997 Technical Library, 2nd Edition

Microchip Technology, Inc. 2355 W. Chandler Blvd. Chandler, AZ 85224-6199 Tel: 602-786-7668 Web: www.microchip.com

Free



CIRCLE 342 ON FREE INFORMATION CARD

This CD-ROM contains technical literature on Microchip's PICmicro 8-bit RISC-based microcontrollers,

non-volatile memory devices, ASSPs, secure data products, and associated development tools. Included are: the *In-Circuit Serial Programming Guide*, appli-

Books Now To order books in this magazine or, any book in print. Please call anytime day or night: (800) BOOKS-NOW (266-5766) or (702) 258-3338 ask for ext. 1456 or visit on the web at http://www.BooksNow.com/electronicsnow.htm.

cation notes, data sheets, third-party guide, development-systems software, users' guides, packaging diagrams and parameters, and worldwide sales and service information.

Microchip products target thousands of embedded control applications in the consumer, automotive, office automation, communications, and industrial markets.

Beginner's Guide to Tube Audio Design

by Bruce Rozenblit
Audio Amateur Corporation
Old Colony Sound Laboratory
P.O. Box 243
Peterborough, NH 03458-0243
\$24.95

TUBE AUDIO DESIGN

CIRCLE 343 ON FREE INFORMATION CARD

This beginner's guide describes what vacuum tubes do and how to use them. It shows readers how to design the building blocks that turn tubes, transformers, and other hardware into amplifiers.

After beginning with tube basics, the author then goes on to explain their characteristics and how to read charts and specifications. In a systematic manner, a complete explanation of audio design is provided for more advanced readers—from single one-stage amplifiers to multistage basics and variations such as triode and ultralinear operation. Complete instructions for building three working projects are provided at the end of the book.

Other chapters cover a simple-gain circuit; negative feedback and how to use it; power sources for the amplifiers, how they work, and how to build them; stabilization and testing; and a description of 13 classic amps and pre-amps. There are also tips on working effectively as a designer, construction techniques, and choosing tools and components.

Passive Electronic Component Handbook: 2nd Edition

Edited by Charles A. Harper McGraw-Hill, Inc. 11 West 19th Street New York, NY 10011 Tel: 800-2MCGRAW or 212-337-5951

Fax: 212-337-4091

Web: www.ee.mcgraw-hill.com

\$89.50



CIRCLE 344 ON FREE INFORMATION CARD

The fully updated and revised edition of this comprehensive standard reference on passive electronic components is the first one in fifteen years. The revision, written by experts in the field, gives quick, reli-

able, one-volume access to critical characteristic data, performance curves, and design guidelines. (A companion volume covers active components.)

The full range of component technologies is covered, including resistors, capacitors, transformers, relays and switches, batteries, fuse and protective components, filters and transient voltage-protection devices, wiring and cabling, and connectors and cabling devices. The source book also offers test and reliability data; listings of specifications and standards; and information on dimensions, configuration, and mechanical and functional performance.

The 786-page handbook provides engineers, designers, and technicians with the practical data needed to more effectively select optimal components in virtually any electronics system.

Mobile Data & Wireless LAN Technologies

by Rifaat A. Dayem
Prentice Hall
One Lake Street
Upper Saddle River, NJ 07458
Tel: 800-382-3419
Web: www.prenhall.com

\$55



CIRCLE 345 ON FREE INFORMATION CARD

Designed for engineers, networking professionals, and mangers, this is a state-of-the-art guide to where wireless data stands now and what to expect tomorrow. It presents detailed technical and business

information for every leading and emerging wireless LAN and WAN technology,

The author reviews potential applications, market forecasts, and key players. Technologies covered include spread spectrum, packet radio, infrared, CDPD, two-way paging, and MAC protocols for wireless networks. Other technologies discussed are mobile IP, 802.11, Hyperlan, wireless ATM, and data-overcircuit-switched solutions. In addition, there is a primer on wireless networking, and information on mobile data, wireless spectra, and international standards.

FrontPage 97 Sourcebook

by Wayne F. Brooks John Wiley & Sons, Inc. 605 Third Avenue New York, NY 10158-0012 Tel: 800-225-5945 Web: www.wiley.com/compbooks/ \$29.95



CIRCLE 346 ON FREE INFORMATION CARD

FrontPage 97 lets you combine graphics, text, audio, and video in your web documents without having to use HTML. With this comprehensive guide to both Front-Page 97 and ActiveX controls, readers can

learn all about creating, publishing, and managing Web pages.

From creating the FrontPage 97 working environment, the book progresses to activating a Web site and working with texts, multimedia, links, tables and frames, forms, and templates and wizards. Enhancing the Web site with ActiveX controls and supporting Java, VBScript, and Netscape plug-ins are fully explained. Instruction is included on preparing, hosting, posting, and maintaining the Web site.

Designer's Guide to Flat-Panel Systems for the **OEM** and Industrial User

Computer Dynamics 7640 Pelham Road Greenville, SC 29615 Tel: 864-627-8800 Fax: 864-675-0106

E-mail: sales@.cdynamics.com Web: www.cdynamics.com

Free

The broadest range of OEM flat-panel



CIRCLE 347 ON FREE INFORMATION CARD

display solutions is presented in this catalog: complete flatpanel computers, plug-in flat-panel CRT replacements, the latest displays (XGA, SVGA, and VGA resolutions, with sizes ranging

from 6.4-inches to 17.7 inches), and an extensive touchscreen selection. Also included are product selection guides, design tips, and complete information on Computer Dynamics PC-compatible single-board computers.

Books Now To order books in this magazine or, any book in print. Please call anytime day or night: (800) BOOKS-NOW (266-5766) or (702) 258-3338 ask for ext. 1456 or visit on the web at http://www.BooksNow.com/elec-

tronicsnow.htm.

Numerous custom configuration options are given for each of the 22 displays shown. The guide features Computer Dynamics' major float-panel displays: Display Pac, VAMP, and the FP-Kit, as well as the new Ultra-Brites. Also included in The Designer's Guide are new enclosures and mounting options for flat-panel display systems, information





The PB-503 is a total design workstation. It has everything! Instrumentation, including a function generator with continuously variable sine/square/triangle wave forms-plus TTL pulses. Breadboards with 8 logic probe circuits.

And a Triple Power Supply with fixed 5VDC, plus two variable 1.3 outputs (+1.3 to 15VDC and -8 to 15VDC). Throw in 8 TTL compatible LED indicators, switches, pulsers,

potentiometers, audio experimentation speaker...plus a lifetime guarantee on all breadboarding sockets! You have everything you need right there in front of you! PB-503—one super test station for under \$300!



Can't Wait! Call Toll-Free For More Information 1-800-572-1028

or the name of your local distributor OR VISIT OUR WEB SITE AT: www.globalspecialties.com 70 Fulton Terrace, New Haven, CT 06512 (203) 466-6103 • Fax: (203) 468-0060

Java Security: Hostile Applets, Holes, and Antidotes

by Gary McGraw and Edward W. Felten John Wiley & Sons, Inc. 605 Third Avenue New York, NY 10158 Tel: 212-850-6336 Web: http://www.wiley.com/compbooks \$19.95



CIRCLE 348 ON FREE INFORMATION CARD

Do you know how to sort out fact from fiction when it comes to Java security? Did you know that whenever you surf the Web with Netscape or use Internet Explorer you are using Java?

That means that someone else's code is running untested on your computer. Your site could be vulnerable to a hostile applet or other security problem.

Written by international security experts, this book tells you how Java security works and how it doesn't. Geared to webmasters or informationtechnology managers, it contains all the information needed to create a strategy for Java use. Included are guidelines for using Java more safely, the future of Java security, as well as explanations of the risks of using Java. The authors also explain the three prongs of the Java security model: Byte Code Verifier, Applet Class Loader, and the Security Manager: and discuss the holes in that model.

1997/1998 Measurement **Products Catalog**

Tektronix, Inc. P.O. Box1520 Pittsfield, MA 01202 Tel: 800-426-2200 (Press 3, Code 1040) Web: www.tek.com/Measurement

Free

Available worldwide, this publication is aimed at design engineers and professionals in the manufacturing, service, communications, and television testing 34 fields. It includes a broad offering of



CIRCLE 349 ON FREE INFORMATION CARD

test equipment: instrumentation solutions range from low-cost instrumentation and handheld products to conventional measurement products and

advanced mixed-signal test solutions.


Throughout, the catalog highlights products manufactured in the company's ISO-9001-certified facilities. In addition to its detailed product descriptions, the catalog lists Tektronix tutorials, and application and technical notes. Extensive indexes arrange products by name and by function, as well as by categories such as oscilloscopes, logic analyzers, VXI systems, telecommunications, and television test.

The 630-page, soft-cover catalog contains a full-color, new product section featuring 80 new products and measurement solutions. This is the first Tektronix catalog to use advanced computer-to-plate printing technology that provides much more detail in product photos than did previous versions.

Modern Dictionary of Electronics, 6th Edition

by Rudolf F. Graf Newnes, Butterworth-Heinemann 225 Wildwood Avenue, Unit B P.O. Box 4500 Woburn, MA 01801-2041 Tel: 617-928-2500 Fax: 617-933-6333 Web: www.bh.com/bh

\$49.95



CIRCLE 350 ON FREE INFORMATION CARD

With over 25,000 electronics terms and hundreds of illustrations, this revised edition includes 5000 more definitions than were in the previous one. In addition, all the previously published terms

To order books in Books Now

this magazine or, any book in print. Please call anytime day or night: (800) BOOKS-NOW (266-5766) or (702) 258-3338 ask for ext. 1456 or visit on the web at http://www.BooksNow.com/electronicsnow.htm.

were updated and revised, where necessary. Definitions are written in a clear and simple style, consistent with the complexity level of the term being defined.

The dictionary covers special topics, such as audio electronics, television and video, computers, fiber optics, microelectronics, communications, industrial processes, and medical electronics. Abbreviations and acronyms are given, and there are tables of SI units and schematic symbols.

Test Instruments Catalog

HC Protek, Inc. 154 Veterans Drive Northvale, N7 07647 Tel: 201-767-7242 Fax: 201-767-7343 E-mail: bcprotek@aol.com Web: www.techexpo.com/www/hcprotek

Free



CIRCLE 351 ON FREE INFORMATION CARD

A series of newly developed test instruments-RF generators, AC millivolt meters, portable power supplies, digital multimeters, and analog metersare among a number of cost-effective, high-reliabil-

ity products featured here. Some of the new products highlighted in this edition are audio generators such as the B-850, the A800-series of VOMs, and a group of 30xx power supplies.

This 52-page publication details more than 75 instruments. It incorporates quick reference guides for selecting digital and analog products, including digital storage scopes, portable and bench-type scopes, state-of-the-art DMMs, and other instruments. The catalog also provides comprehensive specifications data for all products, along with cross-reference indexing for easy identification. Black and white photos accompany each product description.

AMERICAN HEART ASSOCIATION MEMORIALS & TRIBUTES 1-800-AHA-USA1 American Heart Association

NRI'S NEW PC SERVICING COURSE ... **Your Link** to the 21st

Century

At NRI, we provide you with the building blocks to a successful career as a computer service technician, from diagnostic software to CD-ROM tutorials to a high-end computer system with cutting-edge features and sophistication. Our newly revised PC Servicing course has more than just changed with the times. It now offers the technology and training capable of taking you and your career into the 21st century.



Troubleshooting training includes McGraw-Hill's easy-tofollow guides on troubleshooting and interactive computeraided electronics diskettes relating to four key areas: AC electronics, DC electronics, semiconductors, and electronic circuits.

CHECK OUT OUR NEW FEATURES



 Windows 98 upgrade - this long-awaited

> new version of Windows has more power, a new Web look, e-mail capabilities.

single-click functionality, and System File Checker.

YOU'RE NOT ALONE

At NRI, you have the support of a team of informed instructors. now reachable via the Internet - a great resource as you prepare for A+ certification.



SEND FOR YOUR FREE CATALOG TODAY!

4401 Connecticut Avenue, NW

Washington, DC 20008

- Check one FREE catalog only
- ☐ PC SERVICING
 - Computer Programming
 - TV/Video/Audio Servicing
- Networking with Windows NT Computer-Aided Drafting
- Desktop Publishing with PageMaker
- Bookkeeping and Accounting
- Fiction/Nonfiction Writing
- Multimedia ProgrammingMastering Microsoft Office

For career courses approved under GI Bill, \square check here for details

Or call 1-800-321-4634.

Ext. 3002

OR GET YOUR **AAS DEGREE!**

- Accounting Business
- Management Computer
- Science General Studies

Name

Address

A Division of The McGraw-Hill Companies

Accredited Member, Distance Education and Training Council 0003-0598

Realize your dreams of success with NRI hands-on training

Train with and keep this high-end system that sets you on your way:

- Pentium® 200 processor
- MMX[™] technology
- 16 meg RAM
- 1.6 gigabyte hard drive
- Super VGA color monitor
- 8X CD-ROM drive
- 16-bit sound card
- 33.600 baud fax/modem
- PC Options Plan move up to an even more powerful system at student prices



Practical projects take you from electronics basics to advanced troubleshooting techniques.

- This course will help you prepare for the A+ certification exam, with updated lessons and interactive tutorial.
- You'll perform actual experiments with today's most sophisticated diagnostic tools—
 digital multimeter and self-

booting Forefront Troubleshooter™ software. Troubleshooter works independently of any operating system, runs benchmark tests on all hardware components, and identifies faults with multimedia software and peripherals.

- You'll experiment with NRI's exclusive labs: computer-aided electronics demonstrations, 8085 Microprocessor, and NRI Discovery Lab, a complete breadboarding system.
- You'll become acquainted with the Internet and receive up-to-date training in PC communications.

SEND TODAY FOR YOUR FREE CATALOG!



NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS MAIL PERMIT NO. 10008 WASHINGTON, D.C.

POSTAGE WILL BE PAID BY ADDRESSEE




4401 CONNECTICUT AVENUE NW WASHINGTON DC 20078-3543

المامل المرامل المامل المرامل المرامل الماليا المامل

hanks to NRI,
I fulfilled my dream.
My full working
knowledge of
computers enabled
me to work part-time
as a PC technician
for a small computer
store and get an
exciting job with
Creative Labs, Inc.
(the Sound Blaster
people). I'm very
glad I chose NRI!

PETER J. ROMANO • MOUNT VERNON, NY

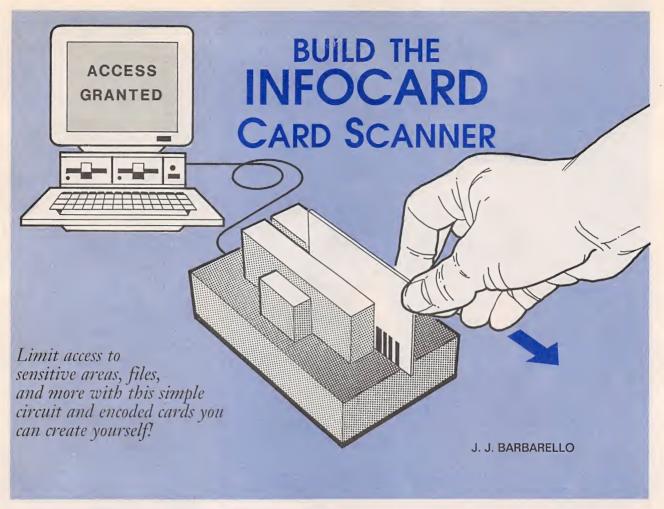

eflective-optical sensors are non-contact devices that use a light source and a photo-sensitive detector to detect the presence or absence of a reflective surface. To sense that type of surface, the source and detector are positioned so the light hits the surface at an angle; the reflected light is then seen by the detector. Infrared (IR) sensors produce better results than visible light sensors because IR energy in the 900-nanometer range is not normally present in large amounts in visible light. An IR sensor can be used easily where ambient light might cause false triggering of a visible-light detector.

A "reflective surface" might lead you to think of a surface such as a mirror that's either present (reflective) or absent (non-reflective). However, while paper is a good reflector of infrared light, many different types of inks (and the graphite in a lead pencil) do not reflect IR energy very much. With

the right type of ink, we can use a reflective IR optical sensor to make a device that reads a series of different width bars separated from each other by a white space on a card. One such bar pattern is the Universal Product Code, or UPCotherwise known as "bar" codes. However, such a code is not limited to the UPC standard. For example, we can use a basic binary code instead. A system with simple wide and narrow bars to code the ones and zeros in a binary code results in a bar code that is easy to sense and can have up to 32,767 possibilities with only 15 bars.

The InfoCard project presented here uses a low-cost reflective-IR optical sensor and a simple interface circuit to create an electronic identification system using any PC. One such use of the InfoCard is for coded-entry access by reading a card and energizing an electric door latch for authorized codes. If you are good at programming PIC chips or Basic Stamp devices, you can readily adapt the InfoCard's Basic software routines to use the reader as a stand-alone device.

The swipe cards themselves can be made quickly and cheaply from almost any available paper stock. Best of all, the project cost is about \$10-\$15, depending on the parts you might already have on hand.

Design Considerations. To find out how far a reflective surface has to be from the sensor in order to see the most reflected light, we can use the law of optics that says that when light hits a surface at an angle, the angle at which it hits the surface (the angle of incidence) is equal to the angle at which it is reflected (the angle of reflection). That is shown in Fig. 1A.

As you can see, the reflecting surface is at the perfect distance from the light source and sensor to pick up the greatest amount of reflected light. If the surface is closer or farther away, the amount of energy that the sensor can detect 37

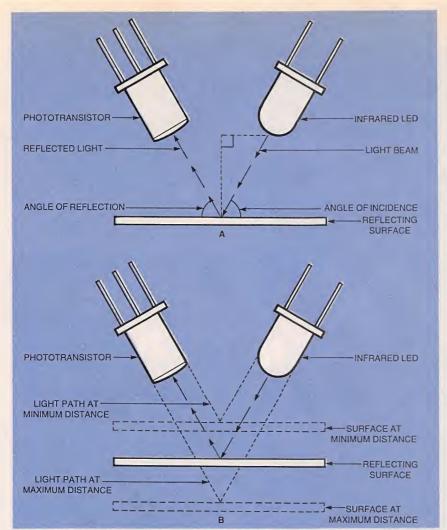


Fig. 1. If a light beam strikes a reflective surface at an angle, it will bounce off at a "mirror-image" angle (A). For best sensing, the surface must be within the area that the light source and detector are focused on (B). If the surface is too close or too far away, the light will not hit the detector.

will drop off. That Is shown in Fig. 1B. If the reflecting surface is too close or too far, the reflected light will miss the sensor completely. Based on the specifications of the reflective sensor we want to use, we can apply simple trigonometry formulas to find the perfect distance from the sensor to the reflective surface. For the device called for, that distance works out to about 5/32 inch.

But we shouldn't stop at just the optimum distance; we should also find the minimum and maximum distances. Again, using basic trigonometry, we find that the surface should not vary more than 1/32 Inch in either direction from the 5/32-inch distance. With those numbers, the card guide that we design should keep the card between 1/8 inch and 3/16 inch from the sensor.

One more piece of information to keep in mind when working with 38 light has to do with the tendency of light to disperse from its source. An example of that can be seen in Fig. 2A. The width of the beam will affect how narrow a barcode stripe can be seen. By adding an aperture as shown in Fig. 2B, the resolution improves. The width of the aperture must be large enough to allow enough light to be reflected back, but small enough to obtain the desired resolution. The InfoCard will be using a 1/16-inch-wide aperture. That will let us space the bars on the card 1/16 Inch apart.

Circuit Description. As you can see in the schematic diagram shown in Fig. 3, the interface circuit for the InfoCard is quite simple and straightforward. Reflective iR sensor SEN1 contains a matched IR diode and an iR detector in a single case. The current for the iR diode is limited by R1; R2 is a pull-up resistor for the collector of the detector. That lets a

PARTS LIST FOR THE **INFOCARD**

SEMICONDUCTORS

IC1—78L05 5-volt regulator, low-power, integrated circuit

IC2—LM339 quad comparator, integrated circuit

SEN1-1STS708 reflective optical switch (Jameco 138093 or similar) LED1-Light-emitting diode, red

RESISTORS

(All units are 1/4-watt, 5% units unless otherwise noted.)

R1, R5-220-ohm

R2, R8-22,000-ohm

R3, R4, R6, R9-2200-ohm

R7-10,000-ohm potentiometer, multi-

ADDITIONAL PARTS AND **MATERIALS**

C1, C2—1µF, 16-WVDC, electrolytic capacitor

J1-DB25 connector, male

9-volt battery, battery connector, hardware, etc.

NOTE: Enhanced software, part number ICARD-S (both source and executable code) is available for \$12.00 from: James J. Barbarello, 817 Tennent Road, Manalapan, NJ 07726. In addition, the author will be happy to answer any questions sent to the adress above (please include a self-addressed, stamped envelope).

proper voltage level always be present at the positive input of IC2-b. The negative input is connected to an adjustable voltage divider made up of R3, R7, and R8. By varying R7, the voltage level at which the comparator switches can be set.

When the positive input of IC2-b is less than the negative Input, the output will be grounded. That occurs when a reflecting surface is close enough to SEN1 to reflect IR light onto the detector. Otherwise, the output will have no voltage on it. The LM339 was designed that way so that the output could be used in circuits that needed the output level to be different than the supply voltage. Because of that, R4 is used to pull up the output of IC2-b when the output should be high. That signal is connected to pin 11 of the PC's printer port.

A second comparator in IC2 is used as an LED driver. When pin 2 of

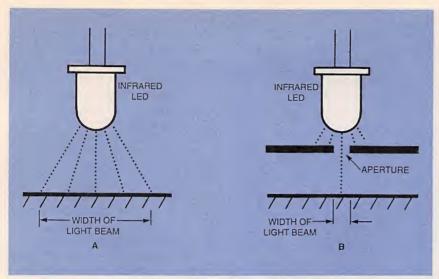


Fig. 2. Even laser light spreads out as it leaves the source (A). That spreading is called divergence. If the spreading light is blocked by an aperture (B), the light beam will have a greater pinpoint accuracy.

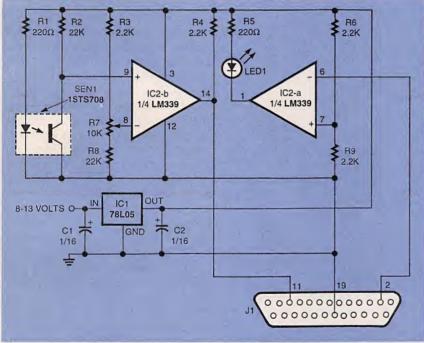


Fig. 3. The InfoCard's circuit is built around a reflective optical sensor (SENI) and a comparator (IC1).

the parallel port is brought high, IC2-a's output will be open, turning off LED1. A low input to IC2-a will ground its output, letting current flow through R5 and LED1, turning it on. Voltage-divider string R6 and R9 set a switching level for IC2-a that is compatible with the voltage levels present on the parallel port.

Power from any suitable voltage source between 8 and 13 volts is regulated to 5 volts by IC1, with C1 and C2 providing filtering.

Construction. The construction de-

tails presented here are only for purposes of building an InfoCard demonstrator. Once you are familiar with the design and operation of the unit, no doubt you'll be designing your own custom housings and installations. To begin, we'll start with the card guides.

The dimensions of the card guides are shown in Fig. 4. Use two pieces of 1/2-inch-thick wood or metal with the dimensions shown in Fig 4A. Both pleces should have their edges rounded as shown. Keep in mind, however, that the




Fig. 4. The card guides need a slot in one of them to mount the sensor. Use flat-head screws to mount the sensor so that the guide slot will be smooth.

rounding shown is greatly exaggerated, it is important that the edges be smooth so that a swipe card will not hang up or tear as it is slid through the guide. The edges that will be rounded will be facing each other to form the quide.

Both guides will have holes drilled in their bottom edge as shown. If you are using metal for the guides, you will have to tap threads into the holes. Once that is done, set one piece aside—it is finished. The second plece will have a notch cut in it as shown for SEN1. The countersunk holes will be used to mount SEN1; the countersink goes on the inside of the guide. The holes should be sized to fit a 4-40 flathead screw.

Install a pair of flathead screws in the countersunk holes with nuts. A second pair of nuts should then be threaded onto the protruding screw threads. Take a piece of perfboard that is large enough to mount SEN1 and drill two holes to match the spacing of the flathead screws. Mount SEN1 on the perfboard. That assembly is then mounted on the screws and held in place with an additional pair of nuts. The second and third nuts will form a "sandwich" that will hold SEN1 in position. Adjust the position of the nuts so that the front of SEN1 is perpendicular to the 39

LISTING 1 REM** INFOCARD.BAS REM** V970719 REM** CLS: DIM n(14) x\$ = "####" + STRING\$(4, 196) + CHR\$(62) + CHR\$(32) + CHR\$(179) sp\$ = STRING\$(10, 32)OPEN "scrn:" FOR OUTPUT AS #1 LOCATE 1, 27: PRINT "PcInfoCard Card Generator" LOCATE 2, 1: PRINT STRING\$(80, 220); 'PROGRAM BEGINS getnumber: LOCATE 5, 27: PRINT SPACE\$(50): LOCATE 5, 27 LINE INPUT "ID Code (0 to 32767): "; number\$ IF LEN(number\$) = 0 THEN number\$ = "0" IF VAL(number\$) < 0 OR VAL(number\$) > 32767 THEN BEEP: GOTO getnumber number = VAL(number\$): n = number: code\$ = " FOR i = 14 TO 0 STEP -1 IF n >= 2 ^ i THEN n(i) = 1n = n - 2 ^ i ELSE n(i) = 0END IF **NEXT** i FOR i = 14 TO 0 STEP -1 IF n(i) = 1 THEN code\$ = code\$ + CHR\$(219) + CHR\$(221)ELSE code\$ = code\$ + CHR\$(221) END IF **NEXT** i code\$ = code\$ + CHR\$(222) code = LEN(code\$): delta = 34 - code IF delta / 2 <> INT(delta / 2) THEN d1 = INT(delta / 2): d2 = INT(delta / 2) + 1 ELSE d1 = delta / 2: d2 = d1 **FND IF** LOCATE 7, 1 CLOSE: OPEN "scrn:" FOR OUTPUT AS #1: GOSUB card LOCATE 5, 27: PRINT SPACE\$(50) LOCATE 8, 52: PRINT "Press" LOCATE 9, 52: PRINT LOCATE 11, 52: PRINT "<H> for Hardcopy" LOCATE 13, 52: PRINT "<Esc> to End" LOCATE 15, 52: PRINT "Any Other Key to Try Again" a\$ = INKEY\$: IF a\$ = "" THEN GOTO getoption a\$ = UCASE\$(a\$) SELECT CASE a\$ CASE IS = CHR\$(27) CLS: LOCATE 18, 1: END CASE IS = "H" CLOSE: OPEN "lpt1:" FOR OUTPUT AS #1: GOSUB card **END SELECT** FOR i = 8 TO 15 LOCATE i, 52: PRINT SPACE\$(26) **NEXT** i GOTO getnumber 'SUBROUTINE TO PRINT/DISPLAY CARD PRINT #1, sp\$; CHR\$(218); STRING\$(code + delta, 196); CHR\$(191) PRINT #1, sp\$; CHR\$(179); STRING\$(code + delta, 32); CHR\$(179) PRINT #1, sp\$; CHR\$(179); STRING\$(22, 32); PRINT #1, USING x\$; number FOR i = 1 TO 3: PRINT #1, sp\$; CHR\$(179); STRING\$(d1, 32); code\$; STRING\$(d2, 32); CHR\$(179)

PRINT #1, sp\$; CHR\$(192); STRING\$(code + delta, 196); CHR\$(217)

surface of the guide and about 1/8 inch below the guide's surface.

An aperture Is made from some black electrical tape or a black write-protect tab for a 5½-Inch computer disk. Cut the tape to the dimensions shown in Fig. 4B. A 1/16-Inch wide by ¾-Inch long slit is also cut in the tape. Place it over SEN1 so that the slit lines up with the LED and the detector in SEN1.

A base plate is made from ¹/₈ - inch hardboard or metal as shown in Fig. 5. The four elongated holes will be used to mount the guides and adjust the width of the slot. The ¹/₈ -inch diameter hole will be used for the wires that will connect SEN1 to the circuit board. If you wish to use a rubber grommet, you should size the hole as needed.

Mount the two card guides onto the base with their rounded edges facing towards each other. Use appropriate screws to mount the guides to the base (wood screws if the guides are made of wood; machine screws if metal). Loosen the screws holding one of the guldes and adjust the spacing between the guldes so that an index card can pass through the opening with ease, but not move from side to side. Re-tighten the gulde in place and check the fit of the Index card to make sure that the guide did not shift or move while tightening it down.

The Interface circuit for the InfoCard Is simple enough to build on a perfboard by following the schematic diagram in Fig. 3. Component placement is not critical. In place of SEN1, make a cable from three equal lengths of Insulated wire that will be able to reach from the board to SEN1. Make note of which wires will be connected to the various pins on SEN1.

A second three-wire cable will be used to connect the InfoCard to the PC. Again, three equal lengths of 22- or 24-gauge stranded wire are used. Connect them to pins 2, 11, and 19 of a 25-pin connector. The other ends of the wires connected to plns 2, 11, and 19 are connected to the circuit according to Fig. 3.

Thread the three-wire cable for SEN1 through the hole in the base plate and connect the wires to SEN1. If you are not sure which

RETURN

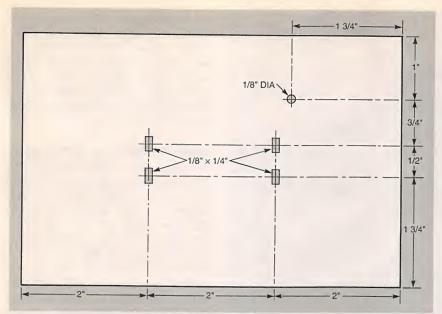


Fig. 5. The base plate has elongated slots so that the width of the card guide can be adjusted. The wires from the sensor pass through the hole in the upper corner. If you are going to use metal for the base plate, make that hole a bit larger and use a rubber grommet to protect the wires.

```
LISTING 2
*** ICARDTST.BAS
*** Version 970715.1
CLS: DEF SEG = 64: ad0 = 888: ad1 = 889
OUT ad0, 2
PLAY "164t240"
LOCATE 1, 1
COLOR 0, 7: FOR I = 1 TO 3: PRINT SPACE$(80); : NEXT i
LOCATE 2, 22
PRINT "PcInfoCard Test (Press < Esc> to End)": : COLOR 7. 0
LOCATE 10, 25: PRINT "Emitter"; STRING$(3, 219); ") \"
LOCATE 11, 40: PRINT "\"
LOCATE 12, 42: PRINT "\"
LOCATE 15, 24: PRINT "Detector "; STRING$(3, 219); ")"
loop00:
a = INP(ad1) AND 128
IF a = 0 THEN
OUT ad0, (INP(ad0) AND 254)
FOR i = 10 TO 15: LOCATE i, 43: PRINT CHR$(32): NEXT i
LOCATE 13, 41: PRINT
LOCATE 14, 39: PRINT " "
PLAY "n48l64p4"
ELSE OUT ad0, (INP(ad0) OR 1)
FOR i = 10 TO 15: LOCATE i, 43: PRINT CHR$(222): NEXT i
LOCATE 13, 41: PRINT "/"
LOCATE 14, 39: PRINT "/"
END IF
a$ = INKEY$: IF a$ = "" THEN GOTO loop00
IF ASC(a$) <> 27 THEN GOTO loop00
END
```

leads are for the LED, measure the resistance across the leads with an ohmmeter. If the ohmmeter shows conduction in one direction, those pins are the LED; if neither direction conducts, they are the detector. Checking the LED with an ohmmeter will also show its polarity.

If you want, you can mount the circuit board to the bottom of the base plate. A set of long screws or standoffs can be used as legs, if desired.

Making a Swipe Card. The coded card consists of narrow (to represent a "0") and wide (for a "1") bars separated by blank white spaces. The wide bar must be at least twice as wide as the narrow bar, and the blank must be as wide, if not wider, than the aperture. The bars should be positioned on the card so their bottoms are within 1/8 inch of the card's bottom. Finally, the bars should be at least 1/2-inch high.

The bars are read right-to-left when looking at the card with the bars at the bottom. The first bar is always narrow—it is a reference bar and is not part of the binary code. The next fifteen bars are a binary representation of a number between 0 and 32767. The first bar after the reference bar is bit 0, with each bit proceeding in order from there up to bit 14.

Making a swipe card is easy with the program in Listing 1. When you enter a number between 0 and 32767, the resulting barcode is displayed on the screen. To print that pattern on a card, press "H". Once printed, cut away the excess paper so that the card will be the correct size. The program marks where the edges of the card should be as a guide. ·

Some printer inks are not IR absorbing (such as the ink used in Hewlett Packard ink jet printers). The best results are obtained with a laser printer or by photocopying a card that has been printed. If you don't have access to a laser printer or a photocopier, you can fill in the bars with a felt-tipped pen that has IR-absorbing ink. You can use the InfoCard's testing and calibration program in the next section to find out if the particular felt-tipped pen you plan to use will do the job.

Testing and Calibration. Apply power to the InfoCard, connect it to a PC's printer port, and load the QBASIC program in Listing 2. Using a DC voltmeter, adjust R7 until the voltage on pin 8 of IC2 is about 4 volts.

Place a card in the card guide so that a wide bar is directly in front of the aperture. Check to see if LED1 is lit. If it is not, turn R7 to increase the voltage level on pin 8 of IC2 until LED1 comes on. Start turning R7 the other way slowly until LED 1 goes out, then add an additional ¼ turn. If the swipe card is moved so that SEN1 sees the white of the card, LED1 sould turn back on.

If that procedure does not work as it should, check the accuracy of the circuit wiring, make sure that all components are properly orientat- 41

LISTING 3 **REM ** ICARD.BAS** REM ** Version 970720 REM CLS: DEF SEG = 64: ON ERROR GOTO errorloop DEFINT A-B, X: DIM a(25), b(25) ad0 = 888: ad1 = 889access1 = 226: 'If this code found, Relay will activate. timerelayon = 10: 'Time Relay Stays On. timeforerror = 5: 'Time to wait when an error occurs before resetting. ***PROGRAM BEGINS CLS: LOCATE 10, 36: PRINT "Ready..."; : x = 0: xo = 0: OUT ad0, 3 WHILE (INP(ad1) AND 128) = 0: WEND: 'Wait for Card " Card In. Turn Off LED and Wait for Bars. OUT ad0, 2 WHILE (INP(ad1) AND 128) = 128: WEND *** First Bar Found. redo1: WHILE (INP(ad1) AND 128) = 0: x = x + 1: WENDIF (x - xo) < 10 THEN x0 = x: x = 0: GOTO redo1: 'Software DeBounce a(0) = x: b(0) = 0*** Width of first (reference) line measured as a(0)FOR i = 1 TO 15 redo01: x = 0'Wait for next line. WHILE (INP(ad1) AND 128) = 128: WEND Determine Width of Line. WHILE (INP(ad1) AND 128) = 0: x = x + 1: WENDIF x < .1 * a(0) THEN GOTO redo01: Software Debounce **NEXT** i Card Read Done. Ref is a(0). Bits are a(1)-a(15). loop02: CLS : code = 0FOR i = 1 TO 15: b(i) = 0 SELECT CASE b(i - 1) CASE IS = 0 IF a(i) > a(i - 1) * 1.5 THEN b(i) = 1: code = code + 2 ^ (i - 1) CASE IS = 1 IF a(i) > a(i - 1) * .75 THEN b(i) = 1: code = code + 2 ^ (i - 1) **END SELECT NEXT** i LOCATE 10, 30: PRINT "CODE: "; code LOCATE 11, 27: PRINT "(" FOR i = 1 TO 15: PRINT RIGHT\$(STR\$(b(i)), 1); : NEXT i: PRINT ")" LOCATE 18, 20: PRINT "< Esc> Ends, Any Other Key Continues..."; blink01: IF code = access1 THEN blink1 = 0: blink2 = 1 ELSE blink1 = 2: blink2 = 3 OUT ad0, blink1 start11 = TIMER WHILE (TIMER - start11) < timerelayon OUT ad0, blink1 startl = TIMER WHILE (TIMER - start!) < .15: WEND OUT ad0, blink2 start! = TIMER WHILE (TIMER - start!) < .15: WEND a\$ = INKEY\$ IF a\$ <> "THEN IF ASC(a\$) = 27 THEN OUT ad0, 2: END ELSE GOTO loop01 WEND GOTO loop01 errorloop: LOCATE 10, 15 BEEP: PRINT "Error Reading Card. < Esc> to End, or Wait For Reset."; start! = TIMER WHILE (TIMER - start!) < timeforerror a\$ = INKEY\$: IF a\$ <> "" THEN a = ASC(a\$) ELSE a = 0 IF a = 27 THEN OUT ad0, 2: END WEND RESUME loop01

ed, and look for other basic errors that occur when bullding an electronic circuit. Double-check the wiring to SEN1. If you are not using a swipe card created on a laser printer or photocopier, the ink you are using mlght not be good for use with the InfoCard.

Using InfoCard. The main program for using and demonstrating the InfoCard is shown in Listing 3. Notice the variables ad0, ad1, access1, timerelayon, and timeforerror in the first few lines of the program. Variable ad0 is the address of the parallel port you will be using. A decimal address of 888 is the default location for LPT1. Variable ad1 points to the location just after ad0. As an alternative, you can set ad1 to equal ad0 + 1. That way, if you change the port that you're using, ad1 will automatically track which port you are using. Variable access 1 is the card code that will activate LED1. Variables timerelayon and timeforerror set the time duration, respectively, of how long LED1 will remain on and how long the program will wait before resetting itself if an error occurs. You can change each of those variables to suit your needs.

With the program running and the InfoCard hardware connected and powered up, the screen will simply say "Ready". Run a card through the reader. The card's value will be displayed. If the value matches the value in access 1, LED1 will light. Pressing the Escape key will end the program, while pressing any other key or waiting for the time specified by timerelayon will reset the program to the "Ready" mode. If the card doesn't read properly, the screen will display "Error in Reading Card". You can either press the escape key to end the program or wait for the program to reset itself to the "Ready" mode. In that case, the delay time before reset is controlled by the timeforerror variable.

Relays and Other Options. Replacing LED1 with an optoisolator will let you interface the InfoCard with other hardware that can be controlled by an on-off-style switch. Devices such as the MOC3010

(Continued on page 49)

veryone who works with electronics would like to have a decent oscilloscope as a part of their bench equipment. Unfortunately, top-end oscilloscopes command top-end prices, putting them out of reach of some hobbyists. No doubt you've studied the article "Build a High-Performance Logic Analyzer" that was featured in the March 1998 issue of Electronics Now. That device sported an expansion port to which you could attach additional add-on modules.


As promised, this month we are presenting such an add-on module. With this module, you can turn the High-Performance Logic Analyzer into a 40-million-samples-per-second dual-trace digital-storage oscilloscope. Like the Logic Analyzer, the digital-storage oscilloscope, or DSO, connects to any PC and only requires DOS to run the host software with a CGA or greater display. Those computer requirements mean that you can easily recycle that old PC that can't run any modern software, but is still too good to just get rid of.

The unit itself can sample two analog channels and four digital inputs simultaneously. The sampling rate can be chosen from any of 10 built-in rates ranging from 40 MHz down to 312.5 kHz. If those rates don't fit your needs, you can use either of the logic analyzer's two external clock inputs. The oscilloscope features include the ability to use standard 10X scope probes, three trigger modes including a sweep-triggered mode with settable level and slope, plus triggering of the storage cycle with the digital-logic Inputs.

Like the logic analyzer that it works with, the DSO can store up to 2048 samples. Additional advantages of a computer-based DSO include the ability to capture and view a transient signal, both before and after the trigger event, and the ability to save the captured data to disk for printing and later study.

Designing a DSO. The functions of a logic analyzer and digital-storage oscilloscope are in many ways very similar. In a DSO, digitized analog signals are stored for later display,

BUILD A DIGITAL-STORAGE OSCILLOSCOPE FOR YOUR HIGH-PERFORMANCE LOGIC ANALYZER

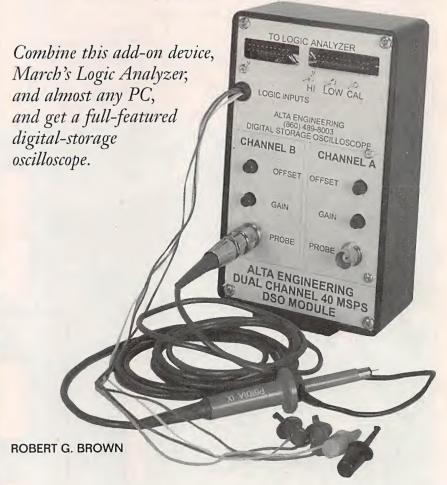

much like a logic analyzer, which stores digital signals for later display.

To take advantage of that fact, the companion logic analyzer was designed to hold all of the functions that are common to both devices. That way, the DSO module is simply an analog front-end for the logic analyzer. The main advantage to that approach is that it helps keep the cost of the project down. The result is having two very powerful test instruments, a logic analyzer and a digital-storage oscilloscope, for about the same cost as a digital-storage oscilloscope alone.

Circuit Description. The schematic diagram for the DSO is shown in Fig. 1. The two analog channels are identical, so only one channel will be described; the other channel works the same way. The input signal is buffered by IC1-a, a highspeed FET-input op-amp. There is no gain in that first stage as Its only function is to prevent loading the source of the Input signal—which Is why the op-amp has a FET-based input. The actual input impedance is set by R1 and the scope-probe resistance (usually 9 megohms for a 10X probe).

The buffered signal is then fed into high-speed op-amp IC2-a, which is configured as an inverting amplifier. The amplifier's gain can be varied with R7. An offset voltage is also added so that the amplifier signal will be within the proper voltage range needed for digital conversion. The offset voltage source comes from IC4, the analog-to-digital converter. The reference voltage is buffered by IC3-b, and then inverted by IC3-a. The amount of offset can be varied with R13 in order to adjust the DSO's ground reference voltage.

The final output signal is then fed through R16 into IC4. A Zener diode, D1, protects the input of IC4 from excessive input voltages. That chip, a dual high-speed six-bit analog-todigital converter, is the heart of the DSO. The rate at which the DSO takes samples is controlled by the logic analyzer through a clock signal on pin 24 of J2. Both scope channels are digitized at the same time with each clock pulse. The sample rates of the DSO are therefore the same as the rates available from the logic analyzer. The six-bit digitized signals convert the analog signal into one of 64 levels. The digital data is buffered by IC5 and IC6. The signals are passed to the logic analyzer through J1. A series of 33-ohm resistors (R20 through R33) provide termination for the data signals.

Since the DSO produces six bits per channel for a total of 12 bits and the logic analyzer has a total capacity of 16 channels, four bits are unused. Those four bits are made available as additional digital channels on the DSO as TP4-TP7. The digital channels connected to TP4 and TP5 can be used as an external trigger on a given logic condition instead of the standard triggered sweep.

There are three test points on the board that are used for probe calibration. They can also be very handy for testing the DSO and troubleshooting the unit. A steady logic low and high are available at TP2 and TP3, respectively. A 312.5-kHz squarewave signal from the logic analyzer (via pin 26 of J2) is available on TP1 as a calibration signal.

Because IC4 is a mixed-signal device—a combination of analoa and digital circuits—multiple power

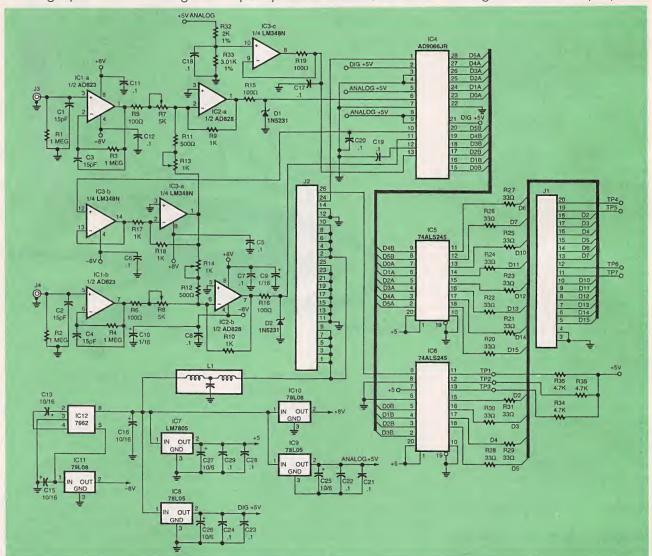


Fig. 1. The Digital-Storage Oscilloscope is an add-on module for the High-Performance Logic Analyzer. It is built around a two-channel, 6-bit analog-to-digital converter. Four additional digital-44 logic channels are included as a bonus.

and ground pins are used to improve performance. Separate supply-voltage regulators are used to minimize any noise that might be present.

To further improve the noise immunity and response of the DSO, external reference voltages are used for IC4 instead of the chip's internal references. The high-end reference has been raised to 5 volts available from IC9, while the lowend reference has been set to 3 volts by R32, R33, and IC3-c.

Power for the DSO module is supplied from the logic analyzer through J2 and L1, a 3-pin EMI filter that removes digital noise from the power line. The filtered 12-volt power feeds the various positive-voltage regulators in addition to IC12, a 7662 voltage inverter. That inverter creates a negative voltage, which is regulated to -8 volts by IC11.

Building the Digital-Storage-Oscilloscope Module. Construction of the DSO is very similar to, if not exactly like, the companion logic analyzer. Reviewing the construction section of that article is a good idea before beginning. You should also get a copy of the DSO software either from the Alta Engineering Web site (http://www.gutbang. com/alta) or from the Gernsback FTP site (ftp://ftp.gernsback.com/ pub/EN/altadso.zip). As an alternative, you can get the software from the source given in the Parts List. Like the logic analyzer, the DSO software doubles as a demo, letting you see what the DSO can do before actually building the module. Any lastminute suggestions or details that do not make it into print will be included with the software. You will need to unzip the file using PKUNZIP or another unzip program. The DSO module connects to the High-Performance Logic Analyzer, so you will need to have built and tested that unit as well.

Like the logic analyzer, the DSO module should only be built on a double-sided PC board with platedthrough holes. The layout of the components and traces are very critical to proper operation, so no other construction method is likely to work. You can make your own PC board from the foil patterns included

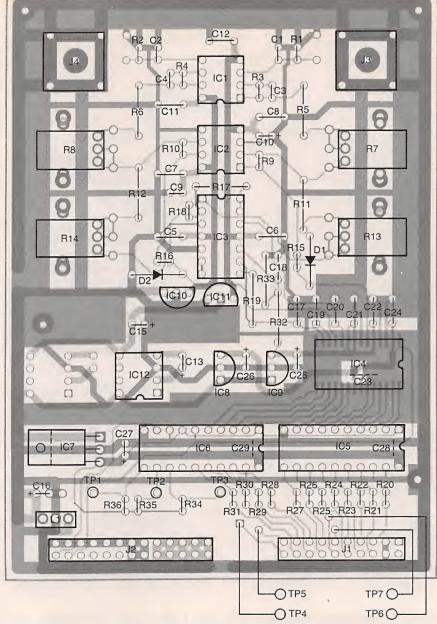


Fig. 2. Here is the parts-placement diagram for the DSO. Note that IC7 is mounted "upside down" from the normally-expected position—the metal tab will be pointing away from the board. Three surface-mount capacitors are soldered to the bottom side of the board.

here, or one can be purchased from the source given in the Parts List.

Since IC4 is a fine-pitch surfacemount device, a low-wattage finetipped soldering iron should be used. The solder should be the smallest diameter that can be found—1/32-inch or less will work well. With a purchased board or one made from the foil patterns, we can begin construction by following the parts-placement diagram shown in Fig. 2.

Start by soldering C23, C28, and C29 to the bottom side of the board. A good technique is to first coat one of the pads with some solder. Place the capacitor on the board and hold it in place with a small screwdriver. Touch the same pad lightly with the soldering iron to re-flow the solder and tack the capacitor In place. Use a magnifying glass to carefully check the position of the capacitor to be sure that it is properly seated on the pads. Flx any alignment errors before continuing. When the part Is properly aligned, solder the other end in place, being sure to create a well-coated solder joint. Once that joint is allowed to cool down, go 45

PARTS LIST FOR THE DIGITAL STORAGE OSCILLOSCOPE MODULE

SEMICONDUCTORS

IC1—AD823 dual op-amp, integrated circuit

IC2—AD828 dual op-amp, integrated circuit

IC3—LM348 quad op-amp, integrated circuit

IC4—AD9066JR dual analog-digital converter, integrated circuit

IC5, IC6-74ALS245 octal transceiver, integrated circuit

IC7—7805 5-volt voltage regulator, integrated circuit

IC8, IC9-78L05 5-volt voltage regulator, low-power, integrated circuit

IC10-78L08 8-volt voltage regulator, low-power, integrated circuit

IC11-79L08 8-volt negative-voltage regulator, low-power, integrated circuit IC12-7662 voltage inverter, integrated circuit

D1, D2-1N5231 Zener diode

RESISTORS

(All resistors are 1/4-watt, 5% units unless otherwise noted.) R1-R4-1-megohm

R5, R6, R15, R16, R19-100-ohm

R7, R8-5000-ohm, potentiometer, printedcircuit mount

R9, R10, R17, R18-1000-ohm

R11, R12-500-ohm

R13, R14—1000-ohm potentiometer, printed-circuit mount

R20-R31-33-ohm

R32-2000-ohm, 1%

R33-3010-ohm, 1%

R34-R36-4700-ohm

CAPACITORS

C1-C4-15-pF, ceramic disc

C5-C8, C11, C12, C17-C22, C24-0.1μF, ceramic disc

C9, C10-1-µF, 16-WVDC, tantalum electrolytic

C13, C15, C16-10-µF, 16-WVDC, electrolytic

C14—Not used

C23, C28, C29—0.1-µF, ceramic, surfacemount

C25, C26, C27—10-µF, 6-WVDC, tantalum electrolytic

ADDITIONAL PARTS AND MATERIALS

J1-20 pin IDC header .51-inch tail J2-26 pin IDC header .51-inch tail


J3. J4-BNC jacks, PC mount

L1-Input RFI filter or 400 mA ferrite bead TP1-TP3-Single-wire test points TP4-TP7-Mini clips

20-conductor female connectors, 20conductor ribbon cable, 26-conductor female connectors, 26-conductor ribbon cable, 4-conductor ribbon cable, case, hardware, etc.

Note: The following items are available from: Alta Engineering, 58 Cedar Lane, New Hartford, CT 06057-2905; Tel: (860) 489-8003; E-mail: alta@gutbang. com; Web: http://www.gutbang.com/ alta: DOS software on 31/2-inch disk, \$10; Blank PC board, \$45; Board Kit with software, \$139; Board Kit with case and software, \$169; Board Kit with case, software, and logic input probe assembly, \$181. Please include \$5 shipping/handling for US orders, \$10 for international. CT residents must add appropriate sales tax. VISA and Mastercard are accepted.

der joint on pin 1 and readjust IC4 when it is free. Do not try to move the chip until the leads are free, or they will bend—a condition that is almost impossible to fix. Once the leads are lined up, solder pin 15. That will secure IC4 to the board. Carefully solder the remaining pins in place using a light touch and only enough solder to cover the joint. Do not solder pins next to each other. Instead, skip around the chip. That will prevent excessive heat from building up at any particular location. You should also not be in a rush to complete the task. When all of IC4's leads have been soldered, examine your workmanship with a magnifying glass. Look at the joints from several different angles to be



When the digital-storage-oscilloscope module is hooked up to the logic analyzer, your setup will look like this. The combined instruments make an almost unbeatable pair for testing and troubleshooting both digital and analog circuits.

sure that they are solid all the way around. Sometimes a bad joint can look good from the top, but it clearly is not properly bonded to the pad when seen from the side.

After taking a short break to relax, continue by mounting the rest of the capacitors and resistors. Keep in mind that IC4 is sensitive to static electricity—take the proper electrostatic-discharge precautions when handling the board. Note that most of the resistors are mounted vertically.

Next, mount L1 and the connectors in place. If you are going to be using a ferrite bead instead of the RFI filter for L1 (see Parts List), thread the bead onto a length of wire and solder it into the two outer holesthe center hole remains unused.

The voltage regulators should be mounted before the rest of the semiconductors. That way, you can do some simple checks of the power supply before installing the rest of the Integrated circuits. If you want, you could use a socket for IC12. Once IC7-IC12 are mounted, check for any shorts between the 12-volt input on J2 and ground. If there are no shorts, or any shorts you found have been fixed, temporarily connect a 12-volt supply across pin 1 (12 volts) and pin 25 (ground) of J2. The voltage at pin 8 of IC12 should be 12 volts. Use the schematic diagram in Fig. 1 to test the volt-

back to the first joint and retouch it if needed. After each capacitor is soldered in place, use an ohmmeter to check for any shorts across the capacitors that might have been caused by solder bridges.

Installing the surface-mount capacitors was good practice for soldering IC4, which we'll tackle next. Place that device in the correct location on the component side of the board and carefully alian the leads so that they are centered on the pads. When you are sure of the alignment, carefully tack down pin 1 with a light touch of solder. That will hold the chip in place. Again, check the lead-to-pad alignment with a magnifying glass. If the align-46 ment is not correct, re-melt the sol-

SOFTWARE CONTROLS FOR THE DIGITAL-STORAGE OSCILLOSCOPE

F1—Scope mode. This selects the mode of operation from CONTINUOUS, SINGLE or NORMAL. In CONTINUOUS mode, the scope ignores any trigger conditions and continuously acquires and displays data. That mode is useful to view DC signals and to adjust the gain pot and offset pot or to determine the trigger levels. In NORMAL mode, the scope acquires and then displays only when the trigger condition is met. That mode is like the standard sweep-trigger mode in an analog oscilloscope except that you can view data from before as well as after the trigger. The SINGLE mode is the same as the NORMAL mode except that only one sample of data is acquired and displayed.

F2-Trigger level X/16 of full scale. This sets the trigger level for channel A in relation to the full scale of channel A. For example, if it is set for 8/16 then the trigger level is at mid-scale.

F3—Trigger slope ±. This sets the trigger slope to either rising ("+") or falling ("-"). If the trigger is set for 8/16 and the slope is set to rising, then the trigger will occur when the input signal rises from below midscale to above mid-scale.

F4-Trigger mode SCOPE/DIGITAL. This selects the type of trigger from either SCOPE for normal scope triggering using the level and slope of the channel A signal or digital logic triggering using the logic inputs 0 (TP4) and 1 (TP5). The logic trigger operates in the same manner as the logic analyzer trigger. See the discussion of logic triggering in that article for a complete explanation.

F5-Clock rate. This selects the clock rate at which the DSO acquires data. You can select any clock rate from 312.5 kHz to 40 MHz. At a rate of 40 MHz, a sample is taken every 25 nanoseconds. Using a lower rate lets you acquire and view data over longer periods.

F6—Acquire. This starts the data acquisition and display. Each scope channel has a separate grid and the four logic channels are at the bottom of the screen. Each channel is labeled on the left-hand side of the screen. The trigger location is shown by a short vertical line at the top of the grids if the trigger position is within the display. The time displayed at the top left of the grid is the number of microseconds at the start of the grid in relation to the trigger position. For example, a time of -3.2 microseconds shows that the displayed data starts at a point 3.2 microseconds before the trigger. If the time is positive, it means that the data shown is from after the trigger. You can view more of the data using the PageDown and PageUp keys to move back and forth one screen of data at a time. The END and HOME keys will jump to the start or end of the data sample. Press the escape key at any time to return to the menu.

F7-Display. This option displays the data currently stored in the program. When the program is first started before any samples have been taken, it will show some sample data that is a sawtooth waveform. You can also use this option to view data that has been recalled from a data file that has been stored on disk (see F8). The PageDown, PageUp, HOME and END keys work the same way as with F6 (Acquire).

F8-File. This option lets you save data and setup information to a file on disk for later viewing. You can also load saved data from a file with this option. The archive ALTADSO.ZIP has several data files that you can view. The CALLO, CALHI, CALCAL files are examples of correct probe compensation. The file VIDEO.DAT shows data captured from a composite video signal.

F9-Configure. This is the same as the configure option for the logic analyzer. If you have already configured the logic analyzer, you do not need to use this option.

F10-Exit. This quits the DSO program.

age at each pin location for all of the ICs. The voltages should be +5 volts, +8 volts, or -8 volts, as shown in the schematic diagram. Any problems should be tracked down and fixed before continuing.

When mounting the ICs, you may use sockets for all of the components except IC1 and IC2—those parts should be soldered directly to the board. Since the ICs are orientated in different directions on the board, double-check their orientation before soldering. It is a good idea to repeat the power-supply test with the ICs in place to catch any other assembly errors.

The three test points will need to be covered with insulating tubing to a height of a little more than a half inch if the case you will be using has a metal panel. You can use ribbon wire that has been split down and partially separated or individual lengths of stranded wire for the digital probes connected to TP4-TP7. A good length for the wires is 12 inches, but they should not be longer

than 18 inches. A set of jumper cables should also be made from 20-conductor and 28-conductor ribbon cable. Those cables will connect the DSO to the logic analyzer. The lengths of the cables should be as short as possible to reach between the connectors between the two units. A length of about 21/2 inches should be about right.

Drill appropriate holes in the front panel of the enclosure that you will be using for the DSO. Mount the completed PC board to the back of the front panel with screws and threaded standoffs. The DSO is now ready for testing.

Testing the DSO Module. The logicanalyzer module should be connected to a computer and turned off. Connect the DSO to the logic analyzer with the ribbon cables and turn the logic analyzer on. You should check for +12 volts at pin 8 of IC12 on the DSO board. If that voltage is not there, you should shut off the power immediately and track down the cause of the problem.

You should have the program ALTADSO.EXE in the same directory on your PC as the logic-analyzer program ALTALOG.EXE. Both programs use the same configuration file, so once you have the logic analyzer configured, it will not be necessary to configure the DSO. Both programs are very similar, so once you are familiar with the logic-analyzer program, you will also understand the basics of the DSO program.

Start up the ALTADSO program from the DOS prompt. Press the F1 key and set the option to "SINGLE". Connect the logic probe from TP7 to TP1, then acquire a sample. The display should look like an oscilloscope screen with the four digital channels showing at the bottom of the display. The very bottom trace is from TP7; it should be showing a squarewave signal that alternates between the low and high levels. Press the escape key to return to the main menu. Repeat that test with the other probes and verify that they all produce squarewave signals.

Connect a scope probe to the BNC connector of channel A. A standard 10X probe rated at 60 MHz can be purchased from a number of mail-order sources for under \$20. If 47 the probe has a 1X-10X-REF switch, set the switch to "REF," otherwise, short the probe tip to the ground clip. Set F1 to CONTINUOUS mode and press F6 to begin acquiring samples. You should see a level trace in the top part of the grid that has an "A" on the left side. Turning R14 should move the trace up or down on the grid. There might be a short delay between adjusting the pot and seeing the results on the dis-


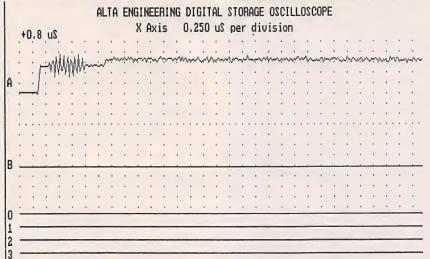


Fig. 3. The DSO software turns an IBM PC into a sophisticated piece of test equipment. As seen in this screenshot, there are two analog channels plus four digital channels. What's more, the software will work with a graphic display as low-resolution as CGA!

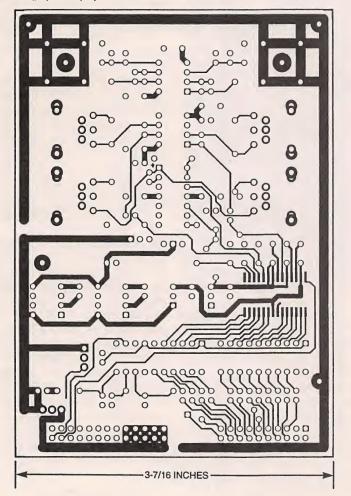


play, which is normal. Switch the probe to "10X" and connect it to TP1. You should see a squarewave signal on the A channel. Turning R8 will change the amplitude of the sauarewave. If everything is working as described, test the B channel in the same way. If not, use a voltmeter to trace the signal path through the op-amp circuit looking for errors. When everything is working properly, mount the board in the case.

Probe Compensation. All 10X scope probes have an adjustment that is used to match the probe to the scope input. Once a probe is adjusted to match a particular channel, that probe should always be used with that particular channel.

The adjustment procedure for the DSO module is slightly different from most scopes. Begin by setting the probe switch to "10X" and connect it to TP2. Select the CONTINU-OUS mode with F1 and then start to acquire samples with F6. You should get a flat trace on the display grid. Use R14 to move the trace to the first grid line from the bottom of the grid display for that channel (remember, channel A covers the top part of the scope grid). Once the trace is on the correct grid line, connect the probe to TP3. Now use R8 to bring the trace to the second grid line from the top of the display. Once that trace is at the correct grid line, you should move the probe to TP1. The display will show a squarewave. Without touching any of the potentiometers on the DSO, adjust the probe's compensation until the top and bottom of the squarewave is at the same grid lines that were used for setting R14 and R8. Repeat the procedure for the other channel. A different probe should be used with each channel; mark each one as to which channel it was calibrated for. If you are not sure about the level settings for probe compensation, detailed information is built into the program and can be viewed by pressing F7 or F8.

Using the Digital-Storage Oscilloscope. At this point you are ready to use the Digital-Storage Oscilloscope. However, before you dive in and begin experimenting with the DSO, there are two important warn-

Electrit





0650780 \$24.95

with membership

Troubleshooting,

Maintaining, & Repairing


Personal

Computers


Values to \$308.50




0044392 \$14.95



0053553 \$50.00



0112738 \$47.95



0236143 \$24.95




0241996 \$44.95



0350787 \$44.95




0242054 \$24.95




024247X \$49.00



0380767 \$39.95



0428433 \$60.00



0501149 \$26.95



0535469 \$29.95



Your one-stop electronics resource!

Exp. Date

Please send me the books listed below, billing me just \$4.95, plus shipping/handling & tax. Enroll me as a member of the Electronics Book Club® according to the terms outlined in this ad. If not satisfied, I may return the books within 10 days without obligation and my membership will be cancelled. I agree to purchase just 2 more selections at regular club prices during the next 12 months and may resign anytime thereafter.

If you select a book that counts as 2 choices, write the book number in one box and XX in the next.

- Check or money order enclosed payable to: The McGraw-Hill Companies
- ☐ Charge my ☐ Visa ☐ MasterCard ☐ AMEX ☐ Discover


Name

See other side for more great selections!

9120989-XX \$69.95 Counts as 2

Signature ___ Address/Apt.#___ City/State ___ Phone

Valid for new members only, subject to acceptance by Electronics Book Club. Canada must remit in U.S. funds drawn on U.S. banks. Applicants outside the U.S. and Canada will receive special ordering instructions. A shipping/handling charge & sales tax will be added to all orders. © 1998 EBC RE598



0487375 \$24.95



0602247 \$13.95



0582165 \$19.95



1571469 \$18.95




0717753 \$19.95



1575472 \$29.95



0155593 \$22.95



1550178 \$22.95



1574875 \$19.95



0497060 \$34.95





1576568 \$24.95



0317917 \$60.00



0707618 \$19.95



882138X \$32.95



1577564 \$24.95



with membership





0239193 \$27.95



0053146 \$24.95



9119018 \$32.95



0242003 \$24.95

PHONE: 1-614-759-3666 (Monday-Friday 8:30 am - 5:00 pm EST) FAX: 1-614-759-3749

INTERNET: www.bookclubs.mcgraw-hill.com

If card is missing, Write to: Electronics Book Club, A Division of the McGraw-Hill Companies, P.O. Box 549, Blacklick, OH 43004-0549



BUSINESS REPLY MAIL

FIRST-CLASS MAIL PERMIT NO. 4474 COLUMBUS, OH

POSTAGE WILL BE PAID BY ADDRESSEE

ELECTRONICS BOOK CLUB®

A Division of The McGraw-Hill Companies

P.O. Box 182600 Columbus, OH 43272-3027

Idudullanddaddalddaaddaddaddaaddaaddaadd

NO POSTAGE **NECESSARY** IF MAILED IN THE UNITED STATES

JOIN NOW TO GET THESE GREAT CLUB BENEFITS:

The largest selection of electronics books available anywhere - at up to 50% off publishers' prices.


Free 10-day trial on every book you order. You must be satisfied – or you may return any book within 10 days with no obligation.

Free Bonus Book Program that lets you earn points for bigger book buying power!

Great Club Terms: simply buy 2 more books at exclusive member savings within the next 12 months with no further obligation.

Dependable Service and Delivery: you're guaranteed to get the best choice of books from all publishers. Every 3-4 weeks, you'll receive the Club Bulletin, packed with the newest and best electronics books. When the Bulletin arrives, if you want the Main Selection, do nothing – it will be shipped automatically. If you want another book or no book at all, just indicate your choice on the Reply Form and return it by the date specified. If you ever receive a book you don't want due to late delivery of the Club Bulletin you may return it at our

All books are paperback unless otherwise indicated. Publishers' prices shown.

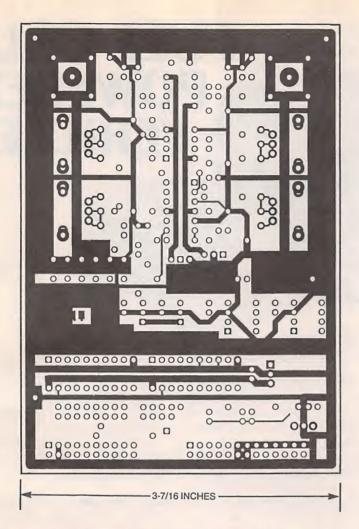

Here's the foil pattern for the solder side of the board. If you make your own board, the holes should be plated through.

ings that you should keep in mind. First of all, the maximum input voltage with the probes in 10X mode is ± 60 volts; with the probes in 1X mode it is only ± 8 volts. The second point is more important—before hooking up the DSO to a new circuit, check to be sure that there is no AC potential between the grounds of the circuit and the DSO.

A typical display of the DSO software is shown in Fig. 3. You have already become somewhat familiar with a few of the DSO's operational modes from testing and calibrating. See the sidebar for a more detailed explanation of each menu option.

To experiment with the various options, hook up the channel A probe to the TP1. Set the scope mode to NORMAL, the trigger mode to SCOPE, the trigger level to 8/16, and the slope to "+". Press F6 to acquire a sample. You should see a squarewave with the rising

edge of the signal under the little trigger-position mark. Press the escape key and then set the trigger slope to "-". Press F6 to acquire another sample, and the trigger-position mark will be over the falling edge of the squarewave. When the trigger is set correctly, a repetitive signal should be steady in the display. You can experiment with the gain and offset adjustments and the other trigger settings using TP1. Remember, if the trigger condition is not met, the display will not be updated.

A Digital-Storage Oscilloscope is probably one of the handiest instruments to have on a test bench. The author welcomes questions, comments, and suggestions. He can be contacted through e-mail at alta @gutbang.com, by telephone at (860) 489-8003, or by visiting the Alta Engineering Web site at http://www.gutbang.com/alta. Ω

INFOCARD CARD SCANNER

(continued from page 42)

(which has a Triac-controlled output) can be used to control AC-based devices. With a simple transistor switch, a small relay could also be activated. If you do not want to remove LED1, the demonstration program also activates pin 3 of the printer port along with LED1. Multiple output circuits can be hooked up to pins 4 through 9 with modification to the program. If you use that pin, be careful of any circuit that you connect to the computer's hardware—you might end up damaging your printer port.

TABLE 1
BASIC Function
INP (address) AND 64
NP (address) AND 128
INP (address) AND 32
INP (address) AND 16

Multiple InfoCards can be hooked up to the same computer if, for example, you want to read cards from different locations. The basic circuit built around IC2-b is all that is needed. If you do not use LED1, a single LM339 can be used for up to four InfoCard stations. Of course, the program will have to be modified to accept input from the different stations. Table 1 shows how to change the input statement in the program to read card information from different input plns.

The InfoCard software could also be integrated into another program or batch file to control access to lists or other data in the computer depending on a card's code. You can modify the program to have multiple access codes. You can also add routines to look up the code in a database to provide related information about the card holder. How you use the InfoCard is limited only by your imagination!

It could be a best seller. But it's free.

To get your free catalog, write:

Consumer Information Center

Dept. BEST, Pueblo, CO 81009



t is hard to beat the internalcombustion engine (ICE) when it comes to performance, range, cost, safety, reliability, and userfriendliness. After all, it has been "under development" for over a century. However, there are several compelling reasons to replace the ICE with a different technology.

For one, there is the matter of petroleum resources. The U.S. now imports nearly half of all petroleum consumed by cars and light trucks. That will increase as the number of vehicles and miles driven continues to increase.

Also, many scientists postulate that global warming results from greenhouse gases, which are produced when fossil fuels are combusted. As such, one of the most significant source of greenhouse gases is the automobile.


Is it possible to reduce those problems by further refining the ICE? Perhaps, but likely not enough to do more than delay the day of reckoning somewhat. Even with the most sophisticated electronic fuelinjection systems and the use of alternative fuels like natural gas, methanol, and ethanol, the ICE cannot meet the zero-emissionvehicle (ZEV) mandates already legislated in California, New York, and Massachusetts and under serious consideration in other states 50 and Canadian provinces.

So, other than banning the automobile, what are the alternatives? The technology most see as the best alternative to the ICE is the batterypowered electric vehicle. However, at the present, the limits that that technology places on the user in terms of range, performance, cost, and flexibility likely means that the battery-powered car will never replace the ICE except in narrow niche markets such as for urban transport and as neighborhood


electric vehicles (See "Neighborhood Electric Vehicles" in the January 1998 issue of Electronics Now for more on that).

But there is another technology that is getting serious consideration-the fuel cell.


Why Fuel Cells? Hydrogen is the ultimate clean fuel. When combined with air to produce energy, only heat, water, and a small amount of oxides of nitrogen (NOx)

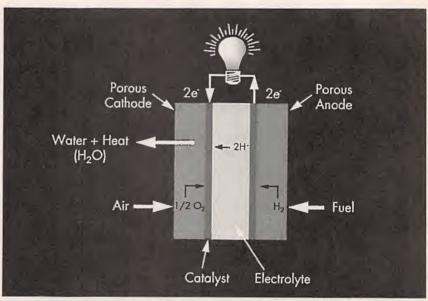

How a fuel cell works. Each membrane assembly consists of electrodes (anode and cathode) with a thin layer of catalyst, bonded to either side of a proton-exchange membrane (PEM). Air flows through the channels in flow-field plates to the cathode. Oxygen in the air attracts the hydrogen protons through the proton-exchange membrane. The air stream also removes the water created as a byproduct of the electrochemical process. (Ballard)

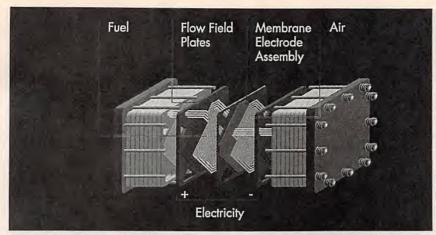

Stacking together more PEM cells increases the voltage, while increasing the surface area of the cells increases the current. (Ballard)

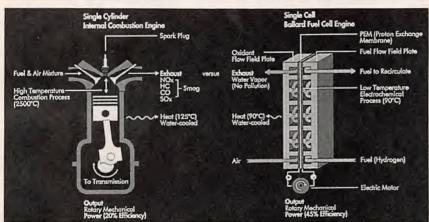

Unlike the internal-combustion engine, with it noise and pollutants, the fuel cell produces electricity quietly and cleanly with water as the by-product. (Ballard)

are produced as by-products. There are no greenhouse gases. Some say the 21st Century will be the "Hydrogen Century" as hydrogen replaces fossil fuels. Hydrogen is extremely abundant, indeed the most abundant element in nature. and is a renewable resource. It is available worldwide since it can be produced from many sources from natural gas to bio-mass including agriculture crops and landfill waste. Using electrolysis, hydrogen can be produced from water anywhere that electricity from any sourceincluding "clean" ones such as wind, solar, or hydro power—is available.

All that sets the stage for the current intensive interest in fuel cells for automotive applications. Though the fuel cell was conceived in 1839 by Sir William Grove, it did not really see practical use until the space age when hydrogen-oxygen fuel cells supplied power onboard the Gemini, Apollo and Skylab spacecraft. They are currently used on the Space Shuttle.

How A Fuel Cell Works, Like a battery, a fuel cell is an electrochemical device that directly produces DC electricity without combustion and without producing polluting emissions. Like batteries, fuel cells have anodes, cathodes, an electrolyte, and positive and negative terminals. Unlike batteries, they do not have to be recharged. Fuel cells produce electric power as long as they are supplied with fuel (namely hydrogen) and oxygen or air.

Companies like Ballard Power Systems, International Fuel Cells, Plug Power, Mechanical Technology, Inc. and others are working on fuel cells for automotive applications. For instance, Ballard, located in Vancouver, British Columbia, has developed several versions of its Proton Exchange Membrane (PEM) fuel cells that have been installed in prototype cars and buses.

The PEM fuel cell consists of two electrodes (anode and cathode) separated by a polymer-membrane electrolyte. Each electrode is coated on one side with a thin layer of platinum catalyst. That catalyst causes the hydrogen fuel to separate into free electrons and protons (positive hydrogen ions) at the anode. The free electrons are conducted as usable electric current, passing through the external circuit. Like with battery-powered EVs, electrical energy from the fuel cell is supplied to an electric motor, or motors. to propel the vehicle. The protons migrate through the membrane electrolyte to the cathode, where they combine with oxygen from the air and electrons from the external circuit to form water and heat. The heat could be used for passenger comfort, windshield defrosting, etc. The output voltage of the fuel cell is increased by stacking individual cells in series; increasing the surface area of the cells increases the current produced.

Storing or Making Hydrogen On Board? Two quite different approaches are being considered with respect to the hydrogen fuel. The nearer term approach is to convert conventional fuels like gasoline, methanol, or ethanol into hydrogen on board the vehicle. The advantage of that technique is that the current infrastructure for transporting and distributing fuels would need little or no change and motorists would see little difference when they refuel.

The longer term approach is to store hydrogen on board as a compressed gas, cryogenic liquid, or in a hybrid material. On-board storage results in a simplified system with higher overall efficiency compared to on-board fuel processing. The disadvantage is that on-board storage requires a completely revamped transportation and distribution infrastructure to handle hydrogen. That could take years to put into place.


An example of a system to produce hydrogen on board is the developed by reformer Argonne National Laboratory for producing hydrogen from methanol. In the Argonne reformer, a noz- 51 zle sprays liquid methanol into a cylinder and an ignition source starts the chemical process that combines methanol with oxygen from the air to release a hydrogen-rich mixture of gases. That hydrogen-rich gas mixture is injected into the fuel cell. Since the reformer produces both carbon dioxide and carbon monoxide, a small on-board chemical reactor converts the carbon monoxide into carbon dioxide.

Consisting basically of a cylinder packed with a common, inexpensive catalyst, the design is quite simple and would be inexpensive to manufacture. The device is small enough—it takes up less volume than a seven gallon container—to fit under the hood of a compact car. While not as efficient as an onboard hydrogen-storage system, the reformer/fuel cell system could be more efficient than an ICE, yet It produces negligible emissions besides carbon dioxide.

Recently, Plug Power LLC, the Arthur D. Little Research Foundation, and the Los Alamos National Laboratory have successfully developed a gasoline-to-hydrogen reformer. That represents a breakthrough in that it overcomes the problem of fuel-cell poisoning from the high levels of carbon dioxide produced when gasoline is reformed. That is why methanol is being used in other reformer developments.

Unfortunately, largely because of the Hindenburg disaster, extremely explosive hydrogen has a negative image to many people. The hydrogen-filled Zeppelin exploded over Lakehurst, NJ in 1937, killing 36 people. Thus, it could still be a hard sell to convince the public that hydrogen stored as a compressed gas or a cryogenic liquid is safe on the highway. Liquid hydrogen means storage at cryogenic temperatures, which is both complex and expensive. Current compressed gas and liquid hydrogen-storage techniques are heavy and bulky so they greatly limit the range of the vehicle—the same problem that faces batterypowered EVs.

Another solution is to use a metalhydride storage system. Here, cold hydrogen is absorbed in the hydride 52 material. When heated, the material

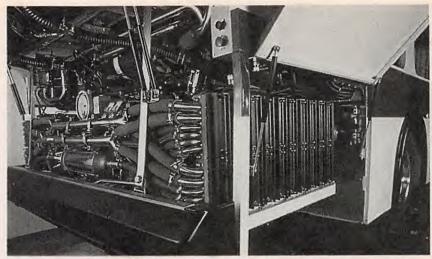

The 275-horsepower Ballard fuel-cell engine fits into the same space as a diesel bus engine. (Ballard)



Ford's radically designed P2000 could be powered by a fuel-cell engine. (Ford)

releases gaseous hydrogen that could be used in a fuel cell. That storage technique is considered safer than either compressed gas or cryogenic storage because the metal hydride releases hydrogen slowly and at relatively low pressure. One drawback is that the storage equipment is still quite heavy and bulky. Therefore, it is most appropriate for use in large vehicles such as buses.

Buses First. While it may be a while before fuel-celled passenger cars and light trucks are on the road, fuel-cell buses are already here, at least in demonstration programs under real-world conditions. Buses have the space and can carry the additional weight of fuel cells using today's technology. Also urban mass-transit agencies are Interested in reducing emissions either voluntarily or in many cases, to meet government mandates for clean air. According to the California Air

Resources Board, a heavy-duty diesel bus generates 11.8 tons of NOx over a 12-year life span. Even so-called clean buses operating on natural gas will emit 5.6 tons of NOx A fuel cell bus can be designed to emit no NOx.

Ballard Power Systems chose transit buses as the first transportation application for its fuel cells. Ballard's, and the world's, first fuelcell-powered transit bus went on the road in 1993. It was a 32-foot transit bus with a 125-horsepower Ballard PEM fuel-cell engine fueled directly by hydrogen.

In 1995, Ballard introduced its second bus, a 40-foot ZEV with a 275horsepower Ballard fuel-cell engine. It has a range of 250 miles before refueling and matches the performance of a diesel transit bus, but without the noxious fumes; and it produces far less noise. The only emission from the tailpipe is warm, moist air.

This year, the Chicago Transit



The Ballard fuel cells fit under the backseat of the NECAR II minivan and do not reduce the seating or luggage capacity of the vehicle. (Ballard)

Authority and BC (British Columbia) Transit will each take delivery of three commercial prototype fuelcell buses. The buses will undergo a two year test program that will provide the necessary performance, cost, and reliability data for commercialization of the final product.

Fuel-Cell Cars. Many automakers have fuel-cell R&D programs. Ford, General Motors, and Chrysler are conducting fuel-cell development as part of the Partnership for a New Generation of Vehicles (PNGV)—a partnership between the Federal government and the automakers' U.S. Council for Automotive Research (USCAR) coalition.

Ford is developing a full-performance direct-hydrogen PEM system as part of its P2000 project. "Direct" means that hydrogen fuel is stored onboard the vehicle. The P2000 project is aimed at producing a medium-sized family sedan that weighs only 2000 pounds, or about 1200 pounds less than a Ford Taurus, while being about three times as fuel efficient. Ford is working with International Fuel Cells, and Mechanical Technology, Inc. in this Department of Energy project. Ford recently announced it had demonstrated a 50 kW, automobile-size PEM fuel-cell engine. The system weighs 300 pounds and takes up approximately nine cubic feet, so it could easily fit under a car hood.

Chrysler's Pentastar program Is

working with Allied Signal on a Design-to-Cost Direct Hydrogen PEM system. Chrysler hopes to have a prototype gasoline-to-hydrogen fuel cell vehicle on the road by 1999. General Motors' Delphi Divisions plus Ballard and DuPont are working on a 30-kW methanol PEM system.

Daimler-Benz recently unveiled the NECAR 3, the third in a series of fuel-cell-powered "New Electric CARs." Over the past couple of years, Daimler-Benz has also developed the NECAR 1, NECAR 2, and NEBUS transit bus. All used Ballard fuel cells. Indeed, Daimler-Benz has acquired a 25% share in Ballard.

Unlike the previous three D-B fuel-cell vehicles, where the hydrogen was stored in heavy and bulky pressurized tanks, the NECAR 3's fuel is stored in rather ordinary fuel tanks. That is because the fuel is methanol. According to Daimler-Benz, methanol was chosen over gasoline and diesel because of its higher efficiency and lower emissions. However, the engineers are considering a multi-fuel system on early-generation fuel-cell-powered vehicles to allow for a phase-in period until methanol is readily available everywhere.

The NECAR 3's methanol reformer uses a water-vapor technique to convert methanol to gaseous hydrogen. Methanol and water vaporize at about 280 degrees C in the reformer to produce hydrogen plus

FOR MORE INFORMATION

Ballard Power Systems Inc. 9000 Glenlyon Parkway Burnaby, BC Canada V5J 5J9 Web: www.ballard.com

Chrysler Corporation/Fuel Cell Program

30900 Stephenson Highway Madison Heights, MI 48071 Tel: 810-583-5270; 810-583-5234

Energy Partners

1501 Northpoint Parkway, Suite 102 West Palm Beach, FL 33407 Tel: 561-688-0500 Fax: 561-688-9610

Ford Motor Company/Alternative **Power Source Technical Department**

PO Box 2053 Dearborn. MI 48121-2053 Tel: 313-594-7957 Fax: 313-845-4495

Fuel Cells 2000

1625 K Street NW, #790 Washington, DC 20006 Tel: 202-785-9620 Fax: 202-785-9629 Web: www.fuelcells.org

General Motors/AC Rochester PO Box 20366

Rochester, NY 14602 Tel: 716-359-6423 Fax: 716-359-6015

International Fuel Cells PO Box 739 195 Governors Highway South Windsor, CT 06074

Tel: 860-727-2310 Fax: 860-727-2399

Mercedes-Benz of North America One Mercedes Drive Montvale, NJ 07645-0350

carbon dioxide and carbon monox-Ide. Following catalytic oxidation of CO, the purified hydrogen is delivered to the fuel cell.

As a demonstration of the practically of its new reformer and fuelcell technology, the NECAR 3 uses a new Mercedes-Benz A-Class subcompact, a 12-foot long four-door sedan. The compact reformer, which is only about 18-inches tall, is located behind the rear seat along with the methanol tank and control system. The A-Class's innovative double floor sandwich construction allows the fuel cells and auxiliary units to be installed completely under the passenger compartment. The 11-gallon fuel tank holds suffi-

(Continued on page 68) 53

NATIONAL ELECTRONICS TECHNICIAN'S DAY 1998

Promote your career and join the ranks of the professional electronics technicians who've proven their expertise and earned the designation of CET.

ALICE BROWN

ince its founding in 1970,
The international Society
of Certified Electronics
Technicians, (ISCET) has developed
and implemented programs and
services to help the working technician remain competent and to
continue to develop skills and technical expertise. During that time,
ISCET has certified over 44,000
technicians nationwide and in over

40 foreign countries, provinces, and territories, while continuing to set industry standards to assure this country's continued technological and economic leadership. To recognize that achievement, to honor the technician's who have demonstrated their skill and high performance by becoming Certified Electronics Technicians (CETs), and to encourage working technicians

to join the ranks of their coileagues who have attained the CET designation, ISCET established *National Electronics Technician's Day* in 1986 as a special day set aside for the certification of technicians worldwide. For this year, that special day, officially declared as "T-DAY," is set for Tuesday, April 21, 1998.

The CET Program. The CET program

VOLUNTEER CET EXAMINERS

Cindy Johnson, CA 280 West Vly Ave Birmingham, AL 35209 205-916-2800 205-916-2807

Alfred Jones, CET, CA Lawson St Comm College 3060 Wilson Rd Birmingham, AL 35221 205-925-2515 DJones@kibanet.com

James Lockhart, CET, CA ITT Tech Inst 500 Riverhills Business Pk Birmingham, AL 35242 205-991-5410 205-991-5025

Susan Gann, CA ITT Tech Inst 500 Riverhills Business Pk Birmingham, AL 35242 205-991-5410 205-991-5025

Tony Jetton, CET, CA Wallace St College Box 2000 Hanceville, AL 35077-2000 205-352-8160

Ricky Reaves, CET, CA Shoals Comm College Box 2545 Muscle Shoals, AL 35662 205-331-5201 205-331-5220 205-331-5222 800-645-8967

David Bryan, CET, CA AL Aviation College Box 1209 Ozark, AL 36360 W-205-774-5113 H-205-774-0163 R.T. Van Iderstine, CET, CA 14563 South Blvd Silverhill, AL 36576 334-945-5942

Daniel McCAnn, CET, CA QMS Inc 30949 Wellington Ct Spanish Ft, AL 36527 W-334-633-4300 X-2047 H-334-621-8163 dmcCAnn@rd.qms.com

Kristi Lashlee, CA PO Box 909 Searcy, AR 72143 501-268-6191

Dennis Blum, CET, CA 8730 W Hazelwood Phoenix, AZ 85037 602-872-8564 602-279-2999 schemati@aztec.asu.edu

HJ Paine, CET, CA 4631 E 8th St Tucson, AZ 85711 520-881-6784 520-795-1209 kirshna@azstamet.com

Parviz Shams, CA So CA Inst Of Tech 1900 W Cresent-Bldg B Anaheim, CA 92801 714-520-5552

Romualdo Malarayap, CET, CA 4249 Filhurst Baldwin Park, CA 91706 626-962-3631 Jim Hines, CA Fresno Tech 731 W Shaw Ave Clovis, CA 93612-3217 209-442-3500

Michael Maxwell, CET, CA St Agnes Med Cntr 1303 E Herndon Ave Ms 040 Fresno, CA 93720 209-449-3030 maxwml@samc.com

David Marson, CET, CA Mac Doctor 1040 W Kettleman Ln#1b339 Lodi, CA 95240-6056 209-944-6191 X6698 Macdoc@CAlweb.com

Jerry Mendoza, CET, CA 4601 Lexington #111 Los Angeles, CA 90029 213-667-1732

Michael Miller, Vo Instr 1205 Bay Oaks Dr Lososos, CA 93402 805-547-7900 X 7143

John Craig, CET, CA NSWC 531 W Hueneme Rd Oxnard, CA 93033 805-982-9803 805-986-2504

George M Kirby, CA ITT Tech Inst 10863 Gold Center Dr Rancho Cordova, CA 95670-6034 916-851-3900 916-851-9225 dikir@inreach.com Jon Sturtz, CET, CA 10840 Alandale Way Rancho Cordova, CA 95670 916-635-6000

Steven Thomas, CET, CA 2306 Marilyn Ave Redding, CA 96002-2304 916-222-2541 916-243-2267 pilotst@nstate,net

Peter Moreno, CET, CA ITT Tech Inst 630 E Brier Dr #150 San Bernardino, CA 92408 909-889-3800

Dr Kenneth Wilson, CET, CA San Diego Cty College 1313 12th Ave San Diego, CA 92101 619-230-2601

Charles Trout, CET, CA Service Concepts Inter Inc 563 N Fairview St Santa Ana, CA 92703 714-836-4981 714-569-0204

Don Winchel, CET, CA M & D Elect Box 123 Smartville, CA 95977 530-639-2477 530-639-2477 dwinchel@mako.com

Howard Bardach, CET, CA 13251 Ventura Blvd #D Studio Cty, CA 91604-1838 818-995-8648 818-995-8647 Marjorie Lona, CA Colorado Aero Tech 10851 West 120th Ave Broomfield, CO 80021 303-466-1714 X-273 800-888-3995

Ken Hill, CET, CA 400 CR 230 Durango, CO 81301 970-247-3032 970-565-8457

George Shaiffer, CET, CA 38 N Dartmouth Widefield, CO 80911 719-540-7458 719-392-1000 719-540-7453

Daniel Shea, CET, CA CT School Of Elect 586 Ella T Grasso Blvd New Haven, CT 06519 203-624-2121

Scott Latino, CET, CA Bombardier Aviation Serv 1 Bradley Internationl Airport Windsor Locks, CT 06096 860-292-7219

Albert Moses, CET, CA Box 188 Cheswold, DE 19936 W-302-736-3816 H-302-653-5648

Karl Hunter, CET, CA 13850 Ketch CV Dr Jacksonville, FL 32224-1143 W-904-633-8143 H-904-223-5289 Edward Guary, Sr, CET, CA Eddy's Car Radio 2505 US 60 E Lake Wales, FL 33853 941-679-7507

John S Richards, CET, CA ITT Tech Inst 2600 Lake Lucien Dr Ste 140 Maitland, FL 32751 407-660-2900 407-660-0694 wizsteve@gte.com

James Sullivan, CET, CA ITT Tech Inst 7955 NW 12th St #119 Miami, FL 33126 305-477-3080 305-477-7561

James D Drennen, CET, CA Pensacola Jr College 1000 College Blvd Pensacola, FL 32504 904-484-2592 850-484-2597 jdrennen@pjc.cc.fl.us

Ronald Handlon, CET, CA Tampa Tech Inst 2410 E Busch Blvd Tampa, FL 33617 W: 813-935-5700 H: 813-898-3970

Dennis Abell, CET, CA 3433 Royal Oak Dr Titusville, FL 32780 407-269-4208

Alan Besore CET, CA New England Inst Of Tech 1126 53rd Ct W Palm Beach, FL 33407 800-826-9986 561-842-9509 Robert Laquerre, CET, CA New England Inst Of Tech 1126-53rd Court W Palm Beach, FL 33407 561-842-8324 boblaq@earthlink.net

Donald K Dahms, CA Atlanta Tech Inst 1560 Metropolitan Pkwy SW Atlanta, GA 30310 404-756-3786 404-752-0180 do4-752-0180 Tec.ga.us

Dan Mundy, CET, CA Norman's Elect 3653 Clairmont Rd NE Atlanta, GA 30341 404-373-8037 71241.336@COM PUSERV.COM

James Vansant, CET, CA Pickens Tech 100 Pickens Tech Dr Jasper, GA 30143 706-692-4500 706-692-4510 yansant@admin1.pick ens.tec.pa.us

John Carolus, CET, CA Matsushita 1225 Northbrook Pkwy 2-380 Suwanee, GA 30174-2933 770-338-6875

Joe Reese, CET, CA Reese Elect Inc Box 499 301 South Main St Swainsboro, GA 30401 912-237-7010 912-237-7463 jreese@plnelanl.neti

William Dol, CET, CA Doi's Elect Svc 105-a N Kainalu Dr Kailua, HI 96734 808-261-6911

Leonard Bowdre, CET, CA 125 SE Thornton Ave Des Moines, IA 50315 W-515-964-6484 H-515-282-3028 lebowdre@dmarc.cc.la.us

Donnin Custer, CET, CA West IA Tech Comm College Box 265-4647 Stone Ave Sioux City, IA 51102-0265 712-274-8733 X-1392

Bruce Tietjen, CET, CA 204 Northgate Mile Idaho Fls, ID 83401 208-523-5045

Dr Harvey Franklin, CA 500 Eighth Ave Lewiston, ID 83501 208-799-2220

Eddie Lane, CET, CA 1501 Honeysuckle Champaign, IL 61821 W-217-333-1070 H-217-356-6996 Fred Schwarzkopf, CET, CA 3708 W 83 Place Chicago, IL 60652 773-767-4126 X-563

Paul R Trowbidge, CA Drive Controls Inc 3232 Skokie Rd Highland Park, IL 60035 847-433-0755 847-662-1563

Paul Tan, CET, CA 915 Augusta St#1 Oak Park, IL 60302-1678 708-848-6327

Lonnie Lewellen, CA lvy Tech State College 4475 Central Ave Columbus, IN 47203 812-372-9925

Matthew A Dillman, CA Ivy Tech State College 3501 First Ave Evansville, IN 47710 812-429-1479

Paul F Maglinger, CET, CA 901 Dover Ct Evansville, IN 47710 812-464-2523 812-421-2170 pmagling@cirtechnol.com

Don Williams, CET, CA Vincennes Univ-TB10 1002 N First St Vincennes, IN 47591 812-885-5801 812-922-5670

Christopher Smith, CA Purdue Univ-N Central 1401 South US 421 Westville, IN 46391 219-785-5256 219-785-5539 csmith@purduenc.edu

Stanley Creitz, CET, CA Comm Services Rr 4 Box 72 Beloit, KS 67420 913-738-5095 screitz@nckcn.com

Keith Knos, CET, CA Knos Elect 1206 Elm Blvd Liberal, KS 67901 316-624-5908

Sharon West, CA Johnson Cnty Comm College 12345 College Blvd Overland Park, KS 66210 913-469-4439

John Hardin, CET, CA KT Tech-Ashland Rtc 4818 Roberts Dr Ashland, KY 41102 606-928-6427 606-329-7136

Danny Keeton, CET, CA 55 W Airview Dr Elizabethtown, KY 42701 502-769-6606 502-769-8278

Lamarr Ritchie, CET, CA Hazard Reg Tech Cntr 101 Vo-tech Dr Hazard, KY 41701 606-435-6101 606-476-8714 lamarr@geocitips.com

VOLUNTEER CET EXAMINERS

Jerry Sipes, CA Spencerian Colge-Lexington 3330 Partner PI Ste 1 Lexington, KY 40503 606-223-9608 606-224-7744 S4744@gte.com

Edward Kimmel, CET, CA Kimmel Elect 2061 Eastern Pkwy Louisville, KY 40204 502-451-3457

Donald Johnson, CA Inst Of Elect Tech 509 S 30th St Paducah, KY 42001 502-444-9679

Jesse Adkison, CET, CA Inst Of Elect Tech 509 S 30th St Paducah, KY 42001 502-444-9676 502-345-2061

Michael Dixon, CET, CA KY Tech-Somerset Campus 230 Airport Rd Somerset, KY 42501 606-679-4303

Dr I F Creel, CET, CA Louisiana Tech College 1710 Sullivan Dr Bogalusa, LA 70427 504-732-6603 fcreel@communique.net

Don Creech, CET, CA 712 Ronson Dr Kenner, LA 70065 504-467-4644

Jeffrey Luminais, CET. CA 4014 Arkansas Kenner, LA 70065 504-888-6848

James Sorrels, CET, csm, CA Polytronics 8101 Kingston Rd #102a Shreveport, LA 71108-5745 318-688-2952 318-688-4888 polytronics@internetmci. com

Frank Serra, CET, CA Audiosonics Inc 159 Mass Ave Arlington, MA 02174 781-648-2430 781-648-2431

Don Harris, CA RETS Elec Sch 965 Commonwealth Ave Boston, MA 02215 617-783-1197

Robert Braunston, CET, CA RETS Elec School 965 Commonwealth Ave Boston, MA 02215 617-783-7197

Earl Tickler, CET, CA RETS Tech Trng Cntr 1520 S Caton Ave Baltimore, MD 21227 410-644-6400 410-644-6481 Carl Miller, CET, CA TESST 5122 Baltimore Ave Hyattsville, MD 20781 301-864-5750

Bob Bellers, CET, CA Washtenaw Comm College 4800 E Huron Riv Dr Ann Arbor, MI 48106 313-973-3316 BBEL373@orchard.washt enow.cc.mi.us

Naomi Ludman, CA Southwestern Michigan Colge 58900 Cherry Grove Rd Dowagiac, MI 49047 616-782-1329

John Thennes, CET, CA 2102 10th Ave S Escanaba, MI 49829 906-786-1413

Gerald Heyn, CET, CA WNMU-TV, WNMU-FM 132 Blueberry Gwinn, MI 49841 906-346-6396H gheyn@nmu.edu

Walter Rellly.III, CET.CSM, CA WER Inc 2727 E Kalamazoo Lansing, MI 48912 517-485-1737 517-485-9555 RSZK23A@PRODIGY.COM

Larry Geissler, CET, CA 3706 Chambersburg Duluth, MN 55811 218-722-9356 Igeiss@theonramp.net

Jim Hunsucker, CET, CA N Cntrl Area Vo Tech Hwy 69 Spur N Bethary, MO 64424 816-425-2196 jhunsucker@shr2.k12.mo. us

William Tharp, CET, CA Grand River Tech Sch 1200 Fair Chillicothe, MO 64601 816-646-3414 816-646-3568 tharpbil@grt.chillicothe.k12 mo.us

Annabel Gooch, CA MAVTS 905 N Wade St Mexico, MO 65265 573-581-0752 573-581-7084 AGOOCH@mexicok12.

Michelle A Stein, CA Moberly Area Vo Tech 1625 Gratz Brown Moberly, MO 65270 816-269-2631 816-269-2692

Marion Denny, CET, CA Rapid TV-Elect Repair 1909 6th St Meridian, MS 39301 601-485-8453 601-485-2102 rpdtpr@intop.net Joseph Sloop, CET, CA Surry Comm College Dobson, NC 27017 910-386-8121 X-301

Linda Dickinson, CA Craven Comm College Ste 22 E Plaza Professional Cnt Havelock, NC 28532 919-444-6005 919-444-1918

Earl Fosler, CET, CA Southeast Comm College 4236 Ridge Lea Rd Millord, NE 68405 402-761-8266 402-761-2324 erfosler@sccm.cc.ne.us

Jack Hopson, CET, CA First Telev Svc 5214 Center Omaha, NE 68106 402-556-4018 402-551-4870

Franklin Davy, CET, CA PO Box 1889 Hillsboro, NH 03244-1889 603-478-5716

Edward Leduc, CET, CA 319 S Hall St Manchester, NH 03103-3955 603-669-1533

Joseph Szumowski, CET, CA JTS Elect 412 Pomona Rd Cinnaminson, NJ 08077 609-829-9669 cinntron@aol.com

Anthony Baratta, CET, CA RETS Inst 103 Park Ave Nutley. NJ 07110 973-661-0600 X-30 973-661-2954

Antonio Mares, CET, CA Luna Vo Tech Inst PO Box 2969 Las Vegas, NM 87701 505-425-5600

Fred Freeman, Jr, CA 550 Tabany Ave Henderson, NV 89015 702-564-9163

David Law, CET, CA Alfred St College 222 Brown Hall Alfred, NY 14802 607-587-3468 607-587-3291 LawsL@alfredlech.edu

Carl Meyer, CET, CA AFPS Inc Test Lab 4236 Ridge Lea Rd Amherst, NY 14226 716-835-6664

Gregory Reiber, CET, CA 9553 Bantry Rd Brewerton, NY 13029-9543 315-668-9936 Larry Steckler, EHF, CET, CA Gernsback Publications 500 Bl-County Blvd Farmingdale, NY 11735 516-293-3000 X-201

Hubert West, CET, CA 20 Schuyler St Lake George, NY 12845 518-668-9285 hwest789@concentric.net

Richard Mildenberger, CET, CA Quaritius TV 147 Merrick Ave Merrick, NY 11566 516-379-3970

Gary Rathbun, CET, CA Cleveland Inst Of Elect 1776 E 17th St Cleveland, OH 44114 216-781-9400 216-781-0331 instruct@cie-wc.edu

Richard Ackerman, CET, CA 3603 Steeplechase Ln #3d Loveland, OH 45140-3246 W-513-573-4704 H-513-583-1402

Lawrence Delonais, CET, CA NEC 1660 Martin Rd Mogadore, OH 44260 330-923-9959

Joseph Carney, III, CET, CA Malthus Diagnosis 35888 Center RIdge Rd N Ridgeville, OH 44039 330-327-2585 330-327-7286 Joecarney@aol.com

Michael Beaver, CET, CA Univ Of Rio Grande School Of Technolgy Rio Grande, OH 45674 740-245-7314 740-245-7440 mbeaver@urgrgcc.edu

A C Falcione, CET, CA Falcon Elect Inc 3266 Kent Rd Stow, OH 44224 330-688-2451 330-688-8747

Joe Harris, CA Tulsa Tech Cntr 3850 N Peoria Tulsa, OK 74106-1691 918-428-2261 X-264

Noah Harrelson, CAt, CA Tulsa Tech Cntr 3850 N Peoria Tulsa, OK 74106-1691 918-428-2261 X-241

Roy Yonce, CA 5103 S Sheridan Rd #214 Tulsa, OK 74145-7627

Vern Hartshorn, CET, CA Mt Hood Comm College 26000 SE Stark St Gresham, OR 97030 503-667-7117

James Shambow, CET, CA ITTES 6035 NE 78th Ct Portland, OR 97218-2854 503-255-6500 800-234-5488

Thomas Gaudiello, CET, CA Chi Inst (RETS Campus) W Chester Pike/Malin Rd Broomal, PA 19008 610-353-7630 tomg@inet.net

L.A. Leibensperger, CET, CA 5225 Camp Meeting Rd Center Vly, PA 18034 610-866-4114

William Margut, CA Elect Inst 19 Jamesway Plaza Middletown, PA 17057-4851 717-944-2731

Gene Hedgepeth, CET, CA, CMAT Techtronics Svcs 2165 Alberdeen Rd Moutaintop, PA 18707-9059 717-868-6566 717-821-0509 717-868-3444

Thomas Plant, CET, CA ETG Of Rhode Isl 29 Dean St Pawtucket, RI 02861 401-725-8719

Stanley Salter, CET, CA Stan Salter Music Svc 826 Bay Blossom Sumter, SC 29150 803-469-3022

Don Multerer, CET, CA Sencore Inc 3200 Sencore Dr Sioux Fis, SD 57107 605-339-0100 800-736-2673 Ronald Rackley, CET, CA Tenn Inst Of Elect 3203 Tazewell Pike Knoxville, TN 37918-2530 423-688-9422 423-688-2419

William Warren, CET. CSM, CA Warren Elect Svc 2540 Sutherland Ave Knoxville, TN 37919 423-546-1128 423-524-5362

John Weaver, CA 3334 Nonesuch Rd Abilene, TX 79606-1924 915-698-5785 915-622-7091 Jweaver@tstc.edu

Francis E Cave, CET, CA 6303 Lotus Dr Arlington, TX 76001 817-468-8706 817-640-7100 cave@arlington.net

Fred Duck, CET, CA Austin Comm College 1212 Rio Grande Austin, TX 78701-1785 512-223-3044 512-247-5763 512-495-7400 Duck2021@juno.com

Alan Green, CET, CA ITT Tech Inst 6330 Hwy 290 East Austin, TX 78723-1061 512-467-6800

Henry Corrie, CET, CA 1460 CR 3413 Chandler, TX 75758 903-852-4140 903-593-0220

Tom Underwood, CET, CA Tomtronics Inc 10424 Remington Ln Dallas, TX 75229 214-357-0644 tomund@aol.com

VOLUNTEER CET EXAMINERS

Rodger W Minatra, CA Grayson Cnty College 6101 Grayson Dr Denison, TX 75020-8299 903-463-8670 903-463-5284 rminatra@grayson.edu

Robert Griffin, CET, CA TCJC 5301 Campus Dr Ft Worth, TX 76119 817-531-4529

Arthur Ruppert, CET, CA 30217 St Andrews Georgetown, TX 78628 512-863-9157

James Harris, CET, CA 1505 Tanglewood Dr Harker Hts, TX 76548 817-698-2331 817-526-1257 harrisi@hoodemh3.Army.MiL

Alden Walther, CA ITT Tech Inst 2950 S Gessner Rd Houston, TX 77063-3751 713-952-2294

Gordon Davis, CA 6934 Drowsy Pine Houston, TX 77092 713-462-8764

Frank Ureno, CA Texas A&M Univ-Kingsville Box 122 Kingsville, TX 78363 512-593-2111 512-593-3605 fureno@tamuk.edu

Marlys A Hendershot, CA 1317 East Huisache Kingsville, TX 78363 H-512-592-0853 W-512-592-3608

Gerald Martin, CET, CA Lucent Technologies 107 W Nakoma San Antonio, TX 78216 210-527-3347 210-527-3347 glmartin@lucent.com Earl Hines, CET, CA 1710 Lamar Lot#2 Sweetwater, TX 79556 915-235-1849 915-235-7404 915-235-7369 ehines@selib.tstc.edu

Sandra Woodman, CA TSTC 300 College Dr Sweetwater, TX 79556 915-235-7406 800-592-8783

Dickie Lide, CET, CA Texas State Tech College 3801 Campus Dr Bldg 7-05 Waco, TX 76705 254-867-4883 254-867-3631

Sandra L Herinckx CET CA Texas State Tech College 3801 Campus Dr Bldg 7-5 Waco, TX 76705 254-867-4883 254-867-3631 sherinck@tstc.edu

Dick Kimberley, CA Salt Lake Comm College 4600 S Redwood Rd Salt Lake Cty, UT 84130-0808 801-957-4235 801-280-9590 801-965-8008

Norman F Gresley, CET, CA 52 Hancock PI NE Leesburg, VA 22075 703-443-0185 540-347-8978

Charles Spiro, CET, CA Lord Fairfax Comm College Box 47 Middletown, VA 22645 540-869-1781 cspiro@shentel.net Ted Rodriquez, CET, CA Skagit Vly College 2405 College Way Mt Vernon, WA 98273 360-416-7757 360-416-7843 rodriquez@skagit.ctc.edu

Roberta Wells, CA ITT Tech Inst N 1050 Argonne Rd Spokane, WA 99212 509-926-2900

Del Dressel, CET, CA Oakland Radio & TV 3901 S Center St Tacoma, WA 98409-3148 206-840-4975 206-840-5099

David Bates, CET, CA Western Wi Tech College 304 N 6th St Lacrosse, WI 54602 608-785-9290 608-785-9407 BatesD@western.tec.wi.us

Duane Busby, CET, CA BC&D Ent 2027 Sherman Ave Madison, WI 53704-5934 608-244-0339

Jeff Paschke, CET, CA 1011 Jefferson St New London, WI 54961 414-982-3641 414-982-3641 JPASC5871@aol.com

Jacob Klein, CET, CA Northcentral Tech College 1000 W Campus Ave Wausau, WI 54401 715-675-3331 X-4395 715-675-4917

C Stephen Triplett, CA NITC 5514 Big Tyler Rd Cross Lanes, WV 25313 304-776-6290 304-776-6262 David L Woodruff,Jr NITC 5514 Big Tyler Rd Cross Lanes, WV 25313 304-776-6290

Egon Strauss, CET, CA V. De Obligado 2376 Buenos Aires Argentina 1428 541-781-8564 541-782-2088 egon@laufquen.com.ar

Richard M Hopkins CA Napanee Dist School 245 Belleville Rd Napanee, Ontario Canada K7I 3M7 613-354-3381

Gary Memory, CET, CA Amer Emby Paris, France PSC-116 Rm# A314 APO AE 09777 33-1-47.53.255 101365.1113@com puserve.com

Antonio M Avellanosa, CA MPITI 45 Tecson St Baguio City, Philippines 2600 74-442-8170 74-442-6532

Jose M T Bigornia, CA c/o Cebu Tech Sch Osmena Bw Cebu City, Philippines 6000 (063-32) 2542434 (063-32)38797 ctsinc@webling.com

Julius Bissessar, CET, CA Quarry Vig P.O. Quarry Vig-Via Siparia Trinidad-Tobago, West Indies 809-649-6127

was designed to measure the degree of theoretical knowledge and technical proficiency of practicing technicians. By acquiring the CET designation, a technician stands out in the electronics industry as being devoted to maintaining the professionalism required by the ever-changing electronics industry. What's more, in the ever-challenging but always demanding job market, a technician who is able to demonstrate his or her ability to perform a job with professional competence and skill has a decided advantage.

It is important to note that while the employment outlook for electronics technicians is strong, to ensure they are hiring experienced and competent workers, an increasing number of employers are now recruiting CETs to fill their servicing positions. What's more, major companies, manufacturers, service centers and educational institutions have come to expect individuals to continue to develop professionally.

It is clear that a strong national certification program is vital to the future of technicians. Proven skill standards and integrity in the development of exams and training programs has earned ISCET the well-deserved reputation as the leader in industry certification. ISCET also recognizes that a technician's need to stay current and proficient does not end with CET certification. That's why ISCET offers certification,

training, continuing education, and peer support to those technicians who carry the CET designation. Thanks to ISCET's efforts, the CET program has become widely accepted by technicians, manufacturers, and consumers.

The Exams. There are two levels of ISCET certification: Associate and Journeyman. The Associate CET exam is intended for technicians with less than four years of training or education. It consists of 75 questions covering basic electronics, AC/DC circuits, basic math, transistors and semiconductors, electronic components, instruments, test and measurement, and troubleshooting.

(Continued on page 68)

Nay 1998, Electronics Now

The Right Way to Measure AC Power

CCURATE MEASUREMENT OF REAL-WORLD AC POWER
HAS LONG BEEN THE BANE OF BEGINNING EE STU-

DENTS. THAT'S ESPECIALLY TRUE OF AC POWER IN THE PRESENCE

OF PHASE SHIFTS, HARMONICS, AND NONLINEAR LOADS.

Power measurement difficulties also partly explain why "magic lamp" and other misinformed "free energy" pseudoscience scams still persist on the Web. It's also why you probably have not yet done your own careful home-power inventory to try and trim your personal power bill.

Thankfully, there's now bunches of new ways to accurately view and measure AC power. But before we look at these new happenings, let's go over some groundwork.

AC Power Fundamentals

Work is done any time you have any force actually move something through a distance. Energy is defined as the capacity for doing work. And power is the time rate of doing work. Electrical power is often measured in watts or kilowatts. Electrical energy is sold by the kilowatt hour. (One watt of power over one hour equals one watt hour of energy. A thousand watts for one hour—or one watt for a thousand hours—gives you one kilowatt hour of energy, for which you usually pay your power company a dime.)

Say you have a black box with two access terminals on it. First measure the instantaneous voltage across these terminals, then measure the instantaneous current that is going into one of the terminals. The instantaneous product of the voltage in volts and the current in amps should be your instantaneous power in watts.

If the current and voltage are both

positive or are both negative, your instantaneous power is going into the black box. We say the black box acts as a load or a sink that is consuming power. Presumably, the input power is internally developing heat, moving something to where it does not want to go, emitting light, altering chemical states, building up some electric or magnetic field, or otherwise doing some sort of work.

On the other hand, if the terminal voltage is positive and your current is negative or vice versa, we'll say the black box is a generator or a source, which is now producing power. The generated power has to come from some other external energy source by diminishing the strength of any previously built up internal electrical or magnetic fields, through chemical conversion to lower energy states, or by some other means that strictly and absolutely conserves total energy, minus, of course, the irreversible fraction always lost as unrecoverable lowgrade heat. Carnot always gets his cut.

NEED HELP?

Phone or write all your US Tech Musings questions to:

Don Lancaster Synergetics Box 809-EN Thatcher AZ, 85552 Tel: 520-428-4073

US email: don@tinaja.com Web page: http://www.tinaja.com The tricky thing about AC "loads" is that they sometimes are a source of energy and sometimes are a sink of energy. Thus, power flow in typical realworld AC devices can be a two-way street: In and out.

Let's use Fig. 1 to see some of the problems that power waveforms can cause for us. In Fig. 1A we have an AC source driving a linear resistive load—a hot water heater, maybe. Input voltage (shown) and current (not shown) will both be sinewaves, and they will both be in-phase with each other. Your power waveform should always be positive and should vary at twice the frequency of the input voltage.

In Fig. 1B we drive a nonlinear resistive load—perhaps a hydrogen generator, or something else that might draw disproportionately more current at higher voltages. The current waveform will now involve harmonics. The power waveform is still always positive, and still varies at twice the input frequency. Only this time, the power waveshape peaks are a lot narrower.

In Fig. 1C we show the power waveform typical of a capacitor-input fullwave rectifier. Such a nonlinear switched load is common in many electronic power supplies. Power is only briefly drawn near the middle of each AC half cycle when the diodes conduct. In this case, the current and voltage are still technically in phase, but the current waveform has very strong and objectionable harmonics.

In Fig. 1D you will find the waveform typical of a lamp dimmer set to half brightness. No power at all is drawn for the first quarter cycle till the lamp is turned on by a Triac or a silicon-controlled rectifier. Such a waveform clearly is phase shifted and has strong harmon-

ACTIVE FILTER COOKBOOK

The sixteenth (!) printing of Don's bible on analog op-amp lowpass, bandpass, and highpass active filters. De-mystified instant designs. \$28.50

RESEARCH INFOPACKS

Don's instant cash-and-carry flat rate consulting service. Ask any reasonable technical question for a detailed analysis and complete report. See www.tinaja.com/info01 for specifics. \$75.00

CMOS AND TTL COOKBOOKS

Millions of copies in print worldwide. THE two books for digital integrated circuit fundamentals. About as hands-on as you can get. \$28.50 each.

INCREDIBLE SECRET MONEY MACHINE II

Updated 2nd edition of Don's classic on setting up your own technical or craft venture. \$18.50

LANCASTER CLASSICS LIBRARY

Don's best early stuff at a bargain price. Includes the CMOS Cookbook, The TTL Cookbook, Active Filter Cookbook, PostScript video, Case Against Patents, Incredible Secret Money Machine II, and Hardware Hacker II reprints.

LOTS OF OTHER GOODIES

Tech Musings V or VI	\$24.50
Ask the Guru I or II or III	\$24.50
Hardware Hacker II, III or IV	\$24.50
Micro Cookbook I	\$19.50
PostScript Beginner Stuff	\$29.50
PostScript Show and Tell	\$29.50
PostScript Video & secrets	\$29.50
PostScript Reference II	\$34.50
PostScript Tutorial/Cookbook	\$22.50
PostScript by Example	\$32.50
Understanding PS Programming	\$29.50
PostScript: A Visual Approach	\$22.50
PostScript Program Design	\$24.50
Thinking in PostScript	\$22.50
LaserWriter Reference	\$19.50
Type 1 Font Format	\$16.50
Acrobat Reference	\$24.50
Whole works (all PostScript)	\$380.00
Technical Insider Secrets	FREE

BOOK-ON-DEMAND PUB KIT

Ongoing details on Book-on-demand publishing, a new method of producing books only when and as ordered. Reprints, sources, samples. \$39.50

THE CASE AGAINST PATENTS

For most individuals, patents are virtually certain to result in a net loss of sanity, energy, time, and money. This reprint set shows you Don's tested and proven real-world alternatives. 28.50

BLATANT OPPORTUNIST I

The reprints from all Don's Midnight Engineering columns. Includes a broad range of real world, proven coverage on small scale technical startup ventures. Stuff you can use right now. \$24.50

RESOURCE BIN I

A complete collection of all Don's Nuts & Volts columns to date, including a new index and his master names and numbers list. \$24.50

FREE SAMPLES

Check Don's Guru's Lair at http://www.tinaja.com for interactive catalogs and online samples of Don's unique products. Searchable reprints and reference resouces, too. Tech help, hot links to cool sites, consultants. email: don@tinaja.com FREE US VOICE HELPLINE

SYNERGETICS BOX 809-EN Thatcher, AZ 85552 (520) 428-4073

ics. In addition, the sharp leading edge is a possible source of radio interference.


In Fig. 1E we see the input to a pure (ideal) capacitor. The voltage and current waveforms will be phase shifted by precisely 90 degrees, with the current leading. There are times when the capacitor is accepting current and increasing its internal electric-field storage. There are times when the capacitor is producing current and decreasing its internal storage. The average long term power is zero!

Driving any pure inductor would again have the voltage and current waveforms shifted by precisely 90 degrees, only this time the voltage is leading. (This is easy for you to remember using the old but reliable mnemonic ELI the ICE man.) Once again, your current goes both ways, and the long-term power always averages to zero.


In Fig. 1F we view the super important case of a typical motor. Here we have a lagging load that is mostly resistive, combined with the inductance of the motor winding. A power factor can be defined as the cosine of the phase angle. A common power factor of 0.8 implies a phase shift of around 37 degrees. With such a lagging load, the current still goes both ways, except the dominant flow this time is into the motor. Note the two brief and lower power reversals in each line cycle.

I have purposely left the current waveforms out of Fig. 1 to keep things simple. I invite you to sketch all these in as an "exercise for the serious student" as there's lots to be learned here.


Summing up: In just about any reasonable AC device you can think of, the power waveform will be more or less nonlinear. Typically, you'll have a hard-to-measure average long-term value overlain by some cyclic double-frequency waveform. Thus, accurate AC power measurement all comes down to measurement of an arbitrary waveform that




A LINEAR RESISTIVE load will consume power as a double frequency sinewave sitting upon a constant pedestal.




A POWER SUPPLY will often draw current as brief and very high harmonic spikes. This waveform is illegal in Europe.




A CAPACITOR will draw zero average power, but acts as a source or sink as its charge increases or decreases.



A NONLINEAR RESISTIVE load such as a hydrogen generator narrows and adds harmonics to the power waveform.



A LAMP DIMMER that is set to one half brightness will draw zero power half of the time. Sharp edges add interference.



A TYPICAL MOTOR will have a lagging power factor. The power flows in both directions, but mostly into the load.

FIG. 1—DUE TO THEIR UNUSUAL SHAPES, AC power waveforms have long been very difficult to accurately display and measure.

TO MEASURE POWER:

- 1. Low pass prefilter voltage and current waveforms so they do not change much in an 80 microsecond interval. Do this identically and sharply.
- 2. Starting with a zero crossing and a minimum of exactly 12,000 line locked times per second, accurately sample and record the voltage.
- 3. Accurately sample and record the current at precisely the same time the voltage is sampled.
- 4. Accurately multiply the sampled current times the sampled voltage. Sum these results. Make sure the multiplication accuracy and precision is consistent with the expected crest factors involved.
- 5. Repeat the measurement, multiplication, and summing exactly 12,000 times. Then divide the summed result by 12,000 to find the ac power consumed or delivered during that one second interval. The result will be both the power in watts and the consumed energy in watt seconds.
- 6. Multiply the watt seconds by 3600 to get the actual average energy consumption in kilowatt hours.

TO CALCULATE ELECTRICAL COSTS:

- 7. Add up the expected actual use hours per month, taking into account the on-off duty cycle and the exact number of days in the target month. Then multiply this times the kilowatt hours to get the kilowatt hours actually consumed for the chosen month.
- 8. Multiply the kilowatt hours used per month by the cost per kilowatt hour to find your monthly operating cost. Sum the monthly operating costs to get the yearly operating cost of the electricity used.

FIG. 2—ONE USEFUL METHOD to accurately measure AC power.

is formed by the product of two values. Thankfully, these days there is a relatively easy way to make any low-frequency measurement.

Do It Digitally

Figure 2 shows you a good way to accurately calculate AC power. While you could dream up an analog multiplier circuit, such devices will quickly get into some crest-factor problems. The crest factor is the ratio of your peak power to the average power. Analog solutions tend to get complex if the needed crest factor exceeds three or so. Dimmers (Fig. 1D) and rectifiers (Fig. 1C) often exceed that value.

Instead, the trick is to A/D convert the current and voltage waveforms, sampling them digitally at the same time, and then digitally multiply them together. How many samples do you need? I'd vote for at least 100 per half cycle, or 12,000 per second. That sounds high at first glance, but with the often-seen power waveforms of Fig. 1C, that would only leave you with ten or so non-zero samples per half cycle, and an accuracy at best of five percent.

Note that any power measurement scheme either has to measure one full cycle or else has to measure a "large number" of cycles. Otherwise errors are certain to happen when portions of cycles are unfairly or randomly represented. It does pay to lock your measurement scheme to the voltage or current zero-crossings such that whole cycles are always measured.

Strong lowpass filtering of both voltage and current waveforms is a good idea to reduce high-frequency noise. But it is super important that identical filters be applied to both voltage and current to prevent group delay problems.

The voltage and the current really should get measured at exactly the same time. But if your sample rate is high enough, you might get by just taking the average of two sequential current measurements. For instance:

> #46—current #47—voltage

#48—current

#49—voltage

#50-current

. . . and then multiply voltage #47 times the average of current #46 and current #48. Similarly, multiply voltage #49 times the average of current #48 and current #50, and so on.

A PIC is your obvious choice for low-

est-cost AC power measurement calculations. Suitable current sensors might include a current transformer (Amecon is one better source), Hall-effect sensors, clamp probes, or measuring the voltage drop across a suitable small series resistor.

The New Stuff

As we already found out back in June, 1997 (MUSE112.PDF), those ordinary cheap voltmeters and ammeters are totally useless to measure real AC power. Such meters measure average rather than true rms. They all lie like a rug, because their "answer" is so highly waveshape dependent. Instead, here are several of the latest new developments in low-cost accurate AC power measurement:

True rms meters—The costs for digital or analog meters with a true rms ability is dropping dramatically. Even Radio Shack now resells \$79 digital voltmeters that can provide true rms. A true rms meter gives you total waveform and full harmonic independence, as long as you stay under acceptable crest factors, which at least gets rid of the really stupid measurement mistakes. But note that since you don't know the phase angle, you still cannot multiply rms volts times rms amps to get power.

Digital storage scopes—The latest of DSOs and many computer data-acquisition plug-ins now permit you to multiply input values together and display the results, which lets you directly view those power waveforms of Fig. 1. Doing that was once horrendously difficult to do.

Analog Devices AD7750-This new chip family was originally intended as a \$2.50 solid-state replacement for a European 50-hertz power meter. Inside you will find a pair of high-accuracy A/D converters, a digital multiplier, a digitalto-frequency converter, and even stepper motor drivers for a mechanical totalizer.

Some external filter parts seem to be required for 60-hertz operation. The output frequencies of only a few hertz are surprisingly low, so they seem best at averages rather than for cycle-by-cycle measurements.

Their data sheet does mention crest factors of two, which suggests that it may not do all that great on stranger waveforms. The European method around high crest factors is to simply make them illegal, which is what IEC standard 555-2 is all about and why there is so much excitement over those new power-factor correction chips and 59 Maxim MAX125—This is a brand new simultaneous multi-channel A/D converter. It is specifically designed for power meters, motor controls, and for power-factor monitoring. There are eight analog inputs that are routed to a 4PDT selector switch and then input to four simultaneous A/D converters. Fourteen bit conversion is provided in three microseconds, by using the circuit of Fig. 3. An external clock is needed. Its typical value is 16 MHz.

There are fourteen parallel data outputs, the lower four of which are used as bi-directional address inputs to program one of eight conversions plus a power down. The choices are A or B sides of one through four channels of conversion. It takes three microseconds to do the one-channel conversion and twelve microseconds for a four-channel conversion.

There are four control inputs of chip select, read enable, write enable, and conversion start. There's also a "conversion-done" output normally used as an interrupt.

After conversion is done, the first read-enable reads out channel 1 as parallel data. The next one outputs channel 2, then channels 3 and 4 in order.

For single-phase power, you'd normally only select a single side of channel 1 for current and channel 2 for voltage. The full four channels may be required for three-phase power systems or exotic motor controls.

Note that this chip only measures the input values for you, doing so accurately and simultaneously. Your host PIC or whatever has to do the math to calculate actual instantaneous power.

The interface to a PIC or other microcontroller is fairly simple. An external data latch may be needed in some systems. Evaluation kits and free chip samples are available. Maxim's Website can be found at www.maxim-ic.com.

Digitest DT500—This is a unique home-power monitor that I've been testing. Using a \$399 list package about the size of a box of cereal, you can monitor 120/240 volt AC appliances for the

voltage, current, kilowatt hours, and duty cycle, plus actual electricity costs in dollars and cents.

AC POWER-MANAGEMENT RESOURCES

Amecon

1900 Chris Ln. Anaheim, CA 92805 (714) 634-2220

Circuit Cellar Ink 4 Park St. #20

Vernon, CT 06066 (203) 875-2751

Digitest Services

4518 Chateau Dr. Albany, GA 31707 (912) 883-4047

EPRI Journal

PO Box 10412 Palo Alto, CA 94303 (415) 855-2000

Electronics Now

500 Bi-County Blvd. Farmingdale, NY 11735 (516) 293-3000

Energy Depot

1797 Northeast Expressway #100 Atlanta, GA 30329 (404) 633-9099

Home Automator

2258 Sandy Lane Mebane, NC 27302 (910) 578-9519

Home Power

PO Box 520 Ashland, OR 97520 (800) 707-6585

Maxim

120 San Gabriel Dr. Sunnyvale, CA 94086 (800) 998-8800

Remote Measurement

2633 Eastlake Ave. #200 Seattle, WA 98102 (206) 328-2255 www.measure.com

Rocky Mountain Institute

1739 Snowmass Creek Rd. Snowmass, CO 81654 (970) 927-3851

Zomeworks

PO Box 25805 Albuquerque, NM 87125 (505) 242-5354

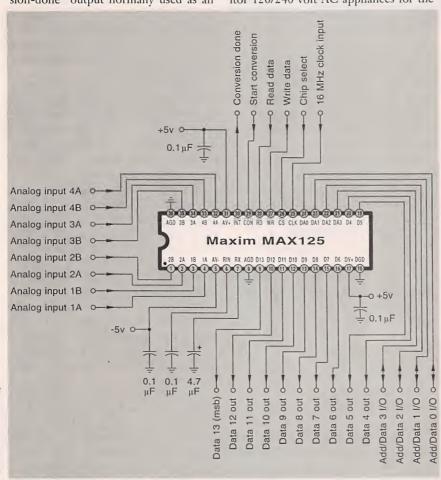


FIG. 3—THE NEW MAXIM MAX125 lets you simultaneously sample voltage and current. This is a crucial first step in digital power measurement. A microcontroller does the actual multiplication.

The Four-Year Electronics Degree Program That Really Hits Home!

Bring The Technology Home With A Bachelor Of Electronics Engineering Degree. No Hassles. No High Cost!



Now's the time to prepare for a profitable career.

We've lowered the cost of higher education.

It's true! You can earn a four-year Bachelor of Electronics Engineering Technology degree today ... and prepare yourself for a high-paying electronics career ... without quitting. your job or ever leaving your home. Because World College, an affiliate of the Cleveland Institute of Electronics, offers you the total flexibility of independent study programs proven effective for people like you who truly want to succeed! World College independent study lessons help you build valuable skills

Mail/Fax Today or Call 1-800-696-7532

step-by-step, and expert instructors are personally available to you with a toll-free call. What a way to earn an education!

Aworld of opportunity.

Where is your career headed? With a four-year bachelor's degree from World College, you call the shots, choosing from incredible, high-paying opportunities in electronics, telecommunications, computer, electrical power, and many other growing fields.

PRESENTA

World College gives you the skills, the knowledge, the power to take advantage of your best opportunity in electronics. And you can do it all at your own pace!

Without leaving home.

World College continually works to provide its students with the most advanced education tools. From the latest equipment and reference books to breakthrough computer-simulated experiments, students are exposed to the latest technological advancements.

All the equipment, parts, and software you need are included in your affordable tuition, including more than 300 hands-on lab experiments you can complete in your home.

Choose your own pace.

Earn your bachelor's degree on your time — and at your pace — because you pay tuition to World College only as you complete the upper-level semesters close to graduation. The faster you make it through, the less you pay. So you have an incentive to make your future happen quickly — yet the freedom to choose your own pace!

Send today for your FREE course catalog — and give yourself that future you've always wanted — with an electronics degree education from World College.



Take charge of your future in electronics.

Four Powerful Reasons To Connect With World College Today:

- Earn your four-year degree!
- 2 Self-paced training!
- Independent study in your home!
- 4 Expert instruction!

Give Me The Power!

Send me a FREE World College course catalog today!



(Please Print Neatly)

Name _____

City

State, Zip
Phone ()

FIIOTIO (

For faster service, call 1-800-696-7532, or call 1-804-464-4600.

Or fax this coupon to 1-804-464-3687.



Lake Shores Plaza 5193 Drive, Suite 113 Virginia Beach, VA 23455-2500



Affiliated with Cleveland Institute of Electronics

WAE66

NAMES AND NUMBERS

Adobe Acrobat 1585 Charleston Rd Mountain View, CA 94039 (800) 833-6687

Card Technology 300 S Wacker Dr. 18th fl Chicago, IL 60606 (312) 913-1334

Data Storage 10 Tara Blvd. 5th fl Nashua, NH 03062 (603) 891-0123

Forming & Fabricating One SME Dr. Dearborn, MI 48128 (313) 271-1500

Klockit PO Box 636 Lake Geneva, WI 53147 (800) 556-2548

Lindsay Publications PO Box 538 Bradley, IL 60915 (815) 935-5353

Logic Devices 1320 Ocean Dr. Sunnyvale, CA 94089 (408) 542-5400

Mabry Publishing PO Box 31926 Seattle, WA 98103 (206) 634-1443

Magnet Applications 415 Sargon Way, Suite G Horsham, PA 19044 (800) 437-8890

> muRata-Erie 2200 Lake Park Dr. Smyrna, GA 30080 (800) 731-9172

Precision Navigation 1235 Pear Ave. #111 Mountain View, CA 94043 (415) 962-8777

Roberts Electric 311 N Morgan St. Chicago, IL 60607 (312) 829-1365

Science/AAAS 1333 H St. NW Washington, DC 20005 (202) 326-6400

Surplus Direct Box 2000 Hood River, OR 97031 (800) 753-7877

Synergetics Box 809 Thatcher, AZ 85552 (520) 428-4073

Don Thompson Seminars 20650 Prairie St. Chatsworth, CA 91311 (800) 423-5400 x2537

You can plug an appliance or other load into the back of the unit, use an accessory snap-around current probe, or directly input any custom test voltage that is related to current. You can very quickly find out that your refrigerator is costing you \$19.37 per month, your freezer gobbles \$9.78, and so on.

Around 3600 current and voltage samples per second are taken in this Intel 8751 based device.

The DT500 certainly does what it claims to, and sure is a lot of fun to play with, especially for doing your own home-energy inventory. On the other hand, the ergonometrics aren't all that great, the LCD desperately needs to be backlit, the cents per kWh cost entry is klutzy, and there's zero I/O provision for data capture, record keeping, or for any history plotting. In addition, some sort of a wireless current sensor with a 35foot range sure would be handy.

The Remote Measurement Sys-64 tems Power Sentry—This is a neat little infrared sensor that sticks to the glass of an ordinary power meter and then counts every time the black mark on the disk comes around. The \$79 device is not only allowed by certain power companies, but it is actually approved of and strongly encouraged. A companion ADC-1 interface and control software for Mac or PC lets you plot a month's power use in halfsecond intervals.

I've gathered a few preliminary sources for AC-power measurement and home-energy management as this month's resource sidebar. More on rms power measurement in MUSE112.PDF on www.tinaja.com.

New Tech Lit

From Logic Devices there's a new Power of Signal Processing data book. In it, you will find special video-filter, alpha mixer-channel, and histogram chips. From muRata-Erie comes a new RF and Microwave Products Catalog in which

you'll find bunches of ceramic resonator and surface acoustic wave (SAW) devices.

Texas Instruments has come out with a pair of new CD-ROM data books entitled InfoNavigator and The Future of DSP Technology. Also from TI are data sheets on their new low-cost TSL253 light-tovoltage converter.

An item on the use of DNA computing to solve a major math problem appears on pages 446-449 of Science for October 17, 1997. Volume 278.

A booklet on higher-performance permanent magnets is available from Magnet Applications. Some low-cost hygrometers are resold by Klockit. Hydraulic bargains can be found at Roberts. Superb laser-printer service seminars, and printer maintenance manuals are offered by Don Thompson.

Richard Grier has a new Visual Basic Programmer's Guide to Serial Communications, his useful text on low-level Windows communications access. It is published by Mabry. From Lindsay Publications comes two volumes of their "new-old" 1906 reprint "Experimental Science" series; those are Elementary Practical Physics and Experimental Physics.

Featured trade journals for this month are Data Storage for hard-disk insiders, Forming & Fabricating for sheet metal, and Card Technology on smart cards.

The latest and finest version of Adobe Acrobat is newly available for \$49 from the Academic Software division of Surplus Direct. Acrobat includes the powerful Distiller 3.01 program which makes an outstanding host-based PostScript-as-language computer. More details on the power of raw PostScript computing can be found in DISTLANG.HTML and also in POSTFLUT.PDF on my Guru's Lair at www.tinaja.com.

For nearly all individuals and all small-scale startups most of the time, an involvement with patents is likely to end up as a net total loss of time, energy, money, and sanity. Find out why in my The Case Against Patents package per my nearby Synergetics ad.

Plus the usual reminder about my Guru's Lair Website at www.tinaja.com. Some of the latest additions include new information on virtual reality, surplus and auction details, and newly expanded Bezier cubic spline coverage.

As usual, most of the mentioned items should appear in our Names & Numbers or AC Power-Management Resources sidebars. Always check there first before calling our US technical helpline.

SUPPLEMENT TO ELECTRONICS NOW MAY 1998

SHOPPER



5 (O) E •

TEST EQUIPMENT SALES



Looking for a 400 MHz 4 channel scope? Why spend \$8000 for a used TEK 2465B when you can buy a new Iwatsu SS-7840 for \$6995 with a 3 year warranty!!!

Also available is a replacement for the TEK 2467B. The Iwatsu TS-8500 boasts a 500 MHz bandwidth and ultra high writing speed for an unbelievable \$11,995 with

a 3 year warranty!!! Call for specs and/or details about these and other high end analog scopes.

PHONE (800) 684-4651 FAX (603) 425-2945

Check out these Items that Just came In and are Ilke brand new!

HP 6002A-001....200 WATT AUTORANGING DC POWER SUPPLY W/ HPIB.........\$795

HP 3325A-002....SYNTH./FUNCTION GENERATOR W/ HIGH VOLTAGE OPT.......\$1950

HP 59501B.......ISOLATED DAC / POWER SUPPLY PROGRAMMER......\$250

HP 6228B......DUAL OUTPUT DC POWER SUPPLY 50 Volt 1 Amp.......\$695

HP 5328B-010....UNIVERSAL COUNTER W/ HIGH STAB. TIME BASE..........\$795

ASK ABOUT OUR NEW TEKTRONIX & FLUKE PRODUCTS

7 = years and 29,000 customers and still growing

LIQUID CRYSTAL DISPLAYS

240x64 dot LCD with built-in controller.

AND 4021ST-EO. Unit is EL back-lit. \$59.00 or 2 for \$109.00 or OPTREX, DMF5005 (non back-lit) \$49.00 or 2 for \$89.00

20 character x 8 line 7½L x 2½H The built-in controller allows you to do text and graphics.

Alphanumeric—parallel interface

16x1\$7.00	20x2\$10	.00 32x2	\$8.00
16x1 (lg. char.)\$10.00	20x4\$15	5.00 40x1	\$8.00
16x2\$7.00			
16x2 (lg. char.)\$10.00	24x2\$10	0.00 40x4	\$20.00
16x4\$15.00	32x4\$10).00 4x2	\$5.00
5V power required • Built-in	C-MOS LCD driver & cor	ntroller • Easy "microprod	cessor"

interface • 98 ASCII character generator • Certain models are backlit, call for more info. Graphics and alphanumeric—serial interface

size	Mfr.	price	size	Mfr.	price
640x480 (backlit)	Epson	\$25.00	480x128	Hitachi	\$10.00
640x400 (backlit)	Panasonic	\$20.00	256x128	Epson	\$20.00
640x200	Toshiba	\$15.00	240x128 (backlit)	Optrex	\$20.00
480x128 (backlit)	ALPS	\$10.00	240x64	Epson	\$15.00
(160x128	Optrex	\$15.00

6" VGA LCD 640X480, Sanyo LMDK55-22 \$2500

LASER PRODUCTS

HeNe Laser Head (10Mw max. output) TEMOO, 15.5" long MFG: NEC \$89.100 Laser Power Supply (for HeNe tube) \$79.24

LASIER SCANNER ASSEMBLY \$19.00
Assembly intended for a laser printer. Includes laser diode, polygon motor (6 sided) and misc. optics and lenses.

LASER DIODE (5mW) with collimator \$20.00

VISIBLE LASER DIODE: 5mw at 670nm \$15.00 Index guided. Threshold current 40 ma typical.

3 and 4mW, 1,300nm LASER DIODES, 5.6mm package, \$15.00 Mitsubishi Electric part number ML701BIR-E21A, General specs are:

1. Vop=1.25, Beam Divergence 25.6° x 28.6°; 2. Tc=24°C, lop=19 to 20mA, ITH=10.7mA; 3. Wavelength range between 1,280nm and 1,330 nm

POLYGON MOTOR UNIT & DRIVER \$6900

Ten-sided first surface mirror mounted on an armature that spins at 125 revolutions per second yielding a beam sweep rate of 1250 sweeps per second. The driver for the polygon und requires 24 volts and plats and minus 12 volts to operate. There is also an 4 their late in front of the polygon scanning mechanism with a three inch duranteet. Great or optical experiments, etc. Very high quality units. MPR-LINEXTENDINGS)

Pos & Bar Cope

MAGNETIC CARD READER \$25.00

Includes: • 20 character dot matrix display with full alpha-numeric capability • keypanel with full alpha-numeric entry • separate 7.5 VDC/0.5 Amp power supply • standard telephone interface extension cord • lithium battery and flat-cone speaker.

HP bar code wand (HBCS 2300).....\$25.00

POWER SUPPLYS

SWITCHING POWER SUPPLYS \$12.00 or 2 for \$20.00 115/230 Volts 73 WATT (2) 4 pin power connectors attached • Dim: 8.5" L x 4.5" W x 2" H Output: +5V @ 2-9.75, A, +12V @ 0-1.5 A, -5V @ 0-0.4 A, -12V @ 0-0.5 A 60 WATT Dim: 8% x 4% x 3 . Output:5V @ 6A + 12V @ 1A - 5V @ 1A - 12V @ 1A

CHARGE COUPLED DEVICES



"The Spy In The Sky" \$29.º | MATRIX TYPE

Thomson 576X550 pixel CCD 400-1,100nm resolution and responsivity. \$500[∞] Original cost device

Sony CCD Imager - designed for black and white composite video cameras. Picture elements: 384 (H) x 491 (V) \$2 Chip size 10.7 (H) x 9.3 (V) mm² • Unit cell size 23.0 (H) x 13.4 (V) um². Ceramic 24 pin DIP package • Mfr: Sony, Part# 016AL \$299

4096 element CCD \$15.00 1024 element CCD \$10.00

LINEAR TYPE

2048 element CCD \$10.00 • 1728 element CCD \$10.00

MISCELLANEOUS

ADAPTEC 4070A (RLL) OR 4000A (MFM), SCSI Controller, your choice \$2590 IBM 370 option XT and AT emulation boards \$25th

2539 W. 237th Street, Bldg. F, Torrance, CA 90505 Order desk only: USA: (800) 872-8878 CA: (800) 223-9977 L.A. & Technical Info: (310) 784-5488 Fax: (310) 784-7590 **OEM INQUIRIES WELCOME**

MONITORS

Non-Enclosed TTL

Comes with pinout. 12V at 1.4 Amp input • Horizontal frequency 15Khz. • Ability to do 40 and 80 column. 5 inch Amber \$25.00 • 7 inch Amber \$25.00 9 inch Amber or Green \$25.00

5" COLOR MONITOR \$39.00

• Flat Faceplate • 320 x 200 Dot Resolution • CGA & Hercules Compatible

• 12 VDC Operation • 15.75 KHz Horiz. Freq. • 60 Hz Vert. Sync. Freq. · Open Frame Construction · Standard Interface Connector · Degaussing Coil included · Mfr. Samtron

2 for \$69tt

9" COLOR SVGA MONITOR \$249.00 Fully Enclosed - Tilt and swivel type.

HACKER CORNER

\$99.00 EMBEDDED 486 COMPUTER

Complete enhanced Intel 486SX-33 based computer in ultra small (9-7/8L x 6-5/8W x 3-1/8H) case. Ideal for embedded operations or as a second computer. Features include: • One 16 bit ISA slot • 3 serial ports plus dedicated printer port • Parallel optical coupled adapter port • Built in IBM PC/AT keyboard port • On board VGA video and port • Uses standard SIMM up to 32 MB • BIOS is PC/AT compatible

Unit has a backup Ni-Cd battery system in case of power failure (5 min. backup time) and lockable front cover to prevent floppy drive access. Mounting / interface provisions for standard 3.5" laptop floppy and 2.5 inch hard drives. Comes with very comprehensive manual.

Encased Spread Spectrum RF Modem \$19900

small communication device which replaces cables between RS-232 devices with wireless RF (Radio Frequency) technology. Attaching a pair of FroxLinks to any two devices with three wire asynchronous RS-232 ports allows wireless data transmittal at rates up to 19.2 Kbaud (full duplex) over a range of 500 - 800 feet. Modules use 900 MZ spread spectrum radio for communication which does not require an FCC site license. A variety of configuration information (radio channel, baud rate, serial port configuration, etc.) can be programmed into module's non-volatile memory by host PC to provide compatibility and avoid overlapping systems. module's non-votation themosy by nots PC to provide compatibility and avoid overlapping systems. Configuration changes are supported by menu driven, on-board software. Commonly used Terminal Emulation software and transfer protocols can be used for configuring modules and transferring data between computers. ProxLinks require only 6-9 VDC (350 mA), RS-232 (9 pin sub - D) interface, and small (~ 4") whip antenna for operation. Unit size is 4.0" x 6.5" x 0.75". Installation schematics and application details available.

US made Micronics 486 VLB ALL in ONE \$39²⁰ or 2 for \$69²⁰ motherboard, supports 3.4 or 57 (PU, at either 25 or 33 mhz basic dock. Can use AMD or Intel from 4865X25 thru 486DX4-100 to HOT new AMD 5X86-133 cpu. On board 5YGA videa. On board 1 meg videa ram expandable to 2 meg with ATI Mach 2 chip set. On board 2 high speed serial ports, 1 printer port, floppy and IDE hard drive controller. On board 256K cache. Uses 72 pin simm memory. Landmark speed rating of 479 with AMD chip.

Board will not fit standard All in One case because of non standard location of riser board. VLB riser board is included with motherboard.

COLOR CCD CAMERA \$14900

• 12 VDC • 1/3-inch, CCD area image sensor • 514 (horizontal) x 491 (vertical) • 2:1 interlaced • 15.734 kHz (horizontal), 59.94 Hz (vertical) • 330 horizontal and 350 vertical lines • 10 lx • 1V, NTSC signal format • Lens: 1/3-inch, fixed focus (F:2.8 f:5.6) • Dimensions: (W) 67 (2.63) x (H) 34 (1.45) x (D) 112.6 (4.43)

SONY Miniature Color LCD Display (LCX005BKB) \$2900 1.4 CM (0.55 inch) Diagonal Full Color Display • Built In Horizontal and Vertical Drivers • Delta

Dot Pattern for High Picture Quality - 537 dots (H) x 222 dots (V) • Compatible with NTSC & PAL Format and Sync Inputs • 12 VDC Operation with -1 to +17 V RGB Signal and Driver Input Voltage · Excellent Display for Virtual Reality Projects, Viewfinders, and Miniature Test Equipment Displays • Pin Outs and Specification Included • Unit Requires Clock, Synchronization and Video

CELL SITE TRANSCEIVER \$4900 2 for \$8911

These transceivers were designed for operation in an AMPS (Advanced Mobile Phone Service) cell site. The 20 MHz bandwidth of the transceiver allows it to operate on all 666 channels allocated. The transmit channels are 870,030-889:800 MHz with the receive channels 45 HMz below those frequencies. A digital synthester is utilized to generate the selected frequency. Each unit contains two independent receivers to demodulate voice and data with a fleceive Signal Strength Indicator (RSSI) circuit to select the one with the best signal strength. The transmitter provides a 1.5 watt modulated signal to drive an external power amplifier, channel selection is accomplished with a 10 bit binary input via a connector on the back panel. Other interface requirements for operation are 26 VDC (unregulated) and an 18.990 MHz reference frequency for the digital synthesizer. The units contain independent boards for receivers, exciter, synthesizer, tunable front end, and interface assembly (which includes power supplies and voltage-controlled oscillator). Service manual, schematics and circuit descriptions included.

Encased Black & White Composite CCD Camera with Adapter IR viewing to 1000 nm 7 ½ L x 2 % W x 1 % H

comes complete with CCD camera, mounting nut on bottom of casing, 12VDC power supply. Excellent low light capability, standard RCA NTSC video out. \$89.00

Great for: entryway security/remote monitoring, 2 for \$159.00

Great for: entryway security/remote monitoring, video conferencing/desktop video conferencing. 2 for \$159.00

This miniature camera is perfect for multimedia computer applications as well as security and surveillance. NTSC output allows use with all popular video digitizing boards for Apple Macintosh and Microsoft video for Windows, Connects directly to any composite monitor or VCR with "video" input. Its razor-sharp wide-angle lens focuses from two inches to infinity and its state-of-the-art CCD technology accurately captures 16 level grayscale images for Quick Time movies and still pictures. Records at 30 frames per second and 260 lines resolution with excellent low light capability. Uses 12VDC (adapter supplied) and standard RCA cable.

Minimum Order: \$20.00. Minimum shipping and handling charge \$5.00. We accept cashiers checks, MC or VISA. No personal checks or COD's. CA residents add 8.25% sales tax. We are not responsible for typographical errors. All merchandise subject to prior sale. Phone orders welcome. Foreign orders require special handling, Prices subject to change without notice, 20% restocking fee for returned orders



www.skyvision.com


FUEL-CELL VEHICLES

(continued from page 53)

clent fuel for a very respectable 250-mile range. Mercedes-Benz has said it plans to produce 100,000 fuelcell powered A-Class cars by 2005.

Not only smaller and more efficient, the new reformer process gives improved performance and dynamic response. According to Mercedes-Benz, when you press the throttle, 90% percent of the power is available in two seconds. That puts fuel-cell vehicles on a par with conventional gasoline- or diesel-powered automobiles. The NECAR 3 is virtually emission-free. Neither nitrogen oxides nor soot particles are produced during the reformulation process or in the fuel cell itself.

In Japan, Mazda has demonstrated a 20-kW PEM fuel-cell engine and Toyota unveiled its first fuel-cell vehicle with a 20-kW PEM system in 1996 with a second-generation version planned for this year, Honda is also working on a fuel-cell vehicle. Renault, in collaboration with Volvo, is working on its FEVER (Fuel Cell

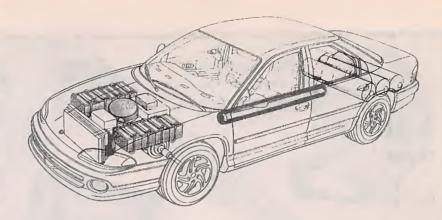

Hydrogen would be stored on-board in the Chrysler-Pentastar direct-hydrogen PEM Fuel-Cell Program vehicle. The PEM fuel-cell system would replace the internal combustion engine. (Fuel Cells 2000)

Vehicle of Extended Range). Reportedly, BMW, Nissan, Volkswagen, Siemens, Toshiba, and others have fuel-cell projects on the drawing

Will you see a fuel-cell car down at your local dealer soon, or even within a few years? Probably not. Besides bugs still to be worked out, there is the matter of cost. Fuel cells are still many times more expensive than the most sophisticated and powerful dual-overhead camshaft,

48-valve V-12 running on ordinary gasoline. Also, automakers are understandably reluctant to cast aside their huge investment in the internal-combustion engine for a new technology that would require another huge investment for new manufacturing facilities and whose consumer acceptance is still an unknown quantity. Still, fuel-cell technology might just represent the best current option to replace the internal-combustion engine.

NATIONAL TECHNICIAN'S DAY

(continued from page 56)

To qualify for Journeyman certification, a technician must have four years or more of education and/or experience in electronics. He or she must also have passed the Associate CET exam and must take and pass a 75-question Journeyman Option exam on one of several areas of specialization. Those areas include: Audio, Biomedical, Communications, Computers, Consumer Products, Industrial, Radar, Video, and Appliance Servicing. A technician may also use the Associate certification issued by the Electronics Technicians Association International (ETA) to qualify for any of the Journeyman options.

If you have already attained Journeyman certification, you can take one of several 25-question Endorsement exams designed to prove advanced expertise in a specific field. Currently, Endorsement exams are available in Camera/ Camcorder/8mm, Computer Mon-68 itor, Motor Control, VCR, Audio, CD/ VLD, and Digital Communications.

The fee structure is as follows: For the Associate exam, the fee is \$30. For any Journeyman Option, the fee is \$35. If both the Associate and a Journeyman Option exam are taken at the same time, the fee is \$50. Each test has a two-hour time limit, and a score of 75% or better is required to pass. For the Journeyman Endorsement exam, the fee is \$35, there is a one-hour time limit, and a 75% score is required to pass the exam.

ISCET test examiners are also qualified to administer FCC element tests. The fees vary depending on which elements are taken.

To Commemorate T-DAY, ISCET invites all technicians to celebrate National Electronics Technicians Day during the Week of April 21 through April 25, 1998, which has been designated T-WEEK. If you are planning to take the CET exams, now is the time as during T-WEEK, ISCET's network of Certified Test Administrators will be providing opportunities for interested technicians to obtain their certification. Whether you are interested in completing your Associate, Journeyman, or Journeyman Endorsement Certificate; gaining continuing education units; or want to sit for one of many FCC elements, contact one the examiners in the Volunteer Examiners box that accompanies this article. Those test administrators are dedicated to the continued growth of the CET program and anxiously await hearing from you. For more information on the CET program, visit ISCET's home page located at www.iscet.org. Ω

ELECTRONIC GAMES

BP69—A number of interesting electronic game projects using IC's are presented. Includes 19 different projects ranging from a simple coin flipper, to a competitive reaction game, to electronic roulette, a combination lock game, a game timer and more. To order BP69 send \$8.00 (includes s&h) in the US and Canada to Electron-



ic Technology Today Inc., P.O. Box 240, Massapequa Park, NY 11762-0240. US funds only. Use US bank check or International Money Order. Allow 6-8 weeks for delivery.

Mark V Electronics, Inc. 8019 E. Slauson Ave., Montebello, CA 90640

Catalog 213/888-8988 Fax 213/888-6868 http://www.mark5co.com Email: mark5co@aol.com

DIY Audio Electronic Kits Lab Equipment kits Audio Enclosures & more!

> 1-800-521-MARK 1-800-423-FIVE

> > Kit \$ 28.15

Kit skill levels Beginner Intermediate Advanced

- Fast Shipping - Quality Kits low prices - In business since 1985 Use this dual LED 20 Color LED Level Meter

display indicating meter with your stereo power amplifier to indicate speaker instantaneous power. Operating range is -30dB to +5dB and can be calibrated to Kit \$ 28:15 9.99 operate with 1 to 200 W amplifiers. Not consume any amplifier power. A

peak LED illuminates on overload!

SEE OUR CATALOG FOR MORE KITS I

Clearance Sale FM Wireless FM Wireless



This is a low power real FM transmitter. Transmit frequency within 88-108 MHz. Transmit range Kit \$ 1250 6.99 about 200 ft. It has high

sensitivity sound pickup by a capacitance microphone. May be used strictly for series purposes such as remote wireless monitering

Stereo Loudspeaker Protector

TY-25 ▲

Kit: \$ 16.75

Super fast acting relay protects TR-503 speakers against destructive DC voltages. Can connect directly to a power amplifier or can use a separate power supply. Has a 3 second turn-on delay to avoid turn-on thumps.

Regulated DC Power Supply



9.99

Kit: \$ 18.75

Clearance Sale 3

It is short circuit proof & has overload protection. Output voltage is variable over a range of 0-50 volts. Current limit trip is adjustable up to max of 3A. May use Mark V #002 transformer.

120-250W Mosfet Power Mono Amplifier AF-2 (6 lbs.)



Power Output: 250W into 4 ohms RMS(42VX2 6A transformer is used). 120W into 4 ohms RMS(33VX2 4A transformer is used). Frequency Response: 3Hz-22,000Hz. THD: <0.03%. Signal to Noise Ratio: 91dB. Sensitivity: 1V RMS at 47k. Load Impedance: 4 or 8 ohms. Power Requirement: ±46VDC 4A or ±60VDC 6A. May use Mark V model 012 Transformer. Suggested Capacitor 8,200uf Kit: \$ 89:80 80.82 Asmb.\$ 114.80 100V Model 020. Suggested Metal Cabinet LG-1925.

300W High Power Mono Amplifier TA-3600 (5 lbs.)



Power Output: 300W into 8 ohms RMS. 540W music power into 8 ohms. Frequency Response: 10Hz-20KHz. THD; < 0.05%. Sensitivity: 1V RMS at 47K. Power Requirement: 60 to 75 VDC at 8A. May use Mark V Model 007 or 009 Transformer. Suggested Capacitor: 8.200uf 100V Model 020 Capacitor, Suggested Metal Cabinet LG-1925.

120W + 120W Pre & Main Stereo Amplifier TA-800MK2 (4 lbs.)



Kit: \$ 67.92 Asmb.\$ 86.95

Power Output: 120W into 4 ohms RMS. 72W into 8 ohms RMS. Frequency Response: 10 - 20 KHZ. THD: < 0.01%. Tone Control: Bass ±12dB, Mid ±8dB, Treble ±8dB. Sensitivity: Phono Input, 3mV into 47K Line, 0.3V into 47K. Signal to Noise Ratio: 86dB. Power Requirement: 40V DC @ 6A, May use Mark V Model 001 or 008 Transformer. Suggested Metal Cabinet Model LG-1924.

80W + 80W Pure DC Stereo Main Power Amplifier TA-802 (4 lbs.)



Power Output: 80W per channel into 8 ohms. THD: < 0.05%. Frequency Response: DC to 200 KHZ, -0 dB, -3dB @ 1W. Power Requirement: 30V AC X 2 @ 6A. May use Mark V Model 001 or 008 Transformer. Suggested Capacitor 8,200uf 50V Model 017. Suggested Metal Cabinet LG-1924

30W + 30W Pre & Main Stereo Amplifier TA-323A (1 lb.)



Power Output: 30W into 8 ohms RMS per channel. THD: < 0.1% from 100 HZ to 10 KHZ. Sensitivity: Phono 3mV @ 47K. Tuner, Tape 130mV @47K Signal to Noise ratio: 80dB. Power Requirement: 22 to 36V AC, 3A. May use Mark V Model 002 Transformer. Suggested Cabinet LG-1684.

Kit: \$ 32.50 Asmb.\$ 50.50

Metal Cabinets Aluminum Front Panel

0 LG-1273 3x12x7" (4 lbs.)\$ 26.50 LG-1684 4x16x8" (7 lbs.) 32.50 LG-1924 4x19x111/2"(10 lbs.) 38.25 LG-1925 5x19x111/2"(10 lbs.) 42.00 LG-1983 21/x19x8" (7 lbs.) 35.25

Transformers (5-12 lbs.) **Toroidal Transformers 6A \$ 30.00 28V/30V x2 # 001

002 36V x2 3A 25.00 6A 32.00 # 003 40V x2 # 008** 28V/30V x2 42.00 6A # 009** 48/53V x2 8A 68.00 # 012** 33/40/42V x2 6A 52.00

Minimum order: \$ 20.00. We accept Visa, MasterCard, Money Orders, and Checks(allow 2 weeks for clearance). We ship by UPS ground inside US (min \$6 00) and ship by US mail outside US. Please call our operator for orders over 2 lbs or foreign orders

Fluorescent Light Driver

SCHOOL PROJECT CORNER

po orders welcomed from schools

Microphone Mixer Mono Amp. A 20.79

Digital Clock with Melody Alarm▲ 25.00

Stereo Pre-Amp with Mic Amp. ▲ 10.78

Mini Stereo Multi-Input Amp. A 30.50 130-in-one Electronic Lab 29.99

Melody Generator

0-15V 5A Regulated DC PS

36W Class A Power Amp.

Dynamic Noise Reduction

Multi-Function Control Switch

20 Bar/Dot Level Display

Superior Electronic Roulette

6W Mini-Amplifier



This unit drives 6-40 watts fluorescent light portable and for emergency use. Works from a 7.2 - 16 VDC

Kit \$ 13.85

9.50

17.50

32.50

26.00

41.45

21.50

▲ 10.50

Kit:\$\sum_{14.75} \text{battery. Includes a "Hi-Efficiency Switching Mode IC Driving Circuit" suitable for use with different lights.

30-in-one Electronic Lab Kit ▲ KA-901 \$ 15.99

12.99

No soldering is required! This required! simple electronics kit safely teaches the fundamentals electronics. of Build radio. alarm, timer and more. Earphone

for private listening. Uses safe battery power. Requires 4 "AA" batteries!

150MHz 8 Digit Frequency Counter



is used adjustment, test & repair of any kind of high frequency circuit products.lt can give up to 8 digit of resolution for a wide frequency

Kit:\$ 79.00 68.00 range 10Hz - 150 MHz. The last input frequency Asmb.\$ 99.00

can HOLD on the display for future reference & comparison. The circuit structure is compact & reliable for the most updated A/D LSI circuitry. The input impedance is 1M ohm.

60+60W Stereo Power Amp. A

SM-302 (11 lbs.)

Kit:\$ 85.00

It provides 3 input jack pairs. One pair accept high impedance micro-phone. The two remaining pairs are for high & low level input

sources. Power Output: 60W per channel into 4 ohms RMS. 20Hz-20KHz THD:<0.1%. Input Sensitivity :Mic /Guitar 10mV, Hi 380mV, Lo 640mV, Ready to plug in when assembled.

300-in-one Electronic Lab Kit



Learn about transistors. capacitors & electronic circuits. Build electronic games, battery checker & more. It even includes a breadboard for adding your own components. Complete with easy-tofollow manuel. Requires 6 "AA" batteries. (6 lbs.)

\$ 59.99 49.99

DIGITAL STORAGE **OSCILLOSCOPES**

WITH **SPECTRUM** ANALYZER. DVM, FREO. COUNTER, AND DATA

LOGGER.



PORTABLE

MODULES CONVERT PC'S INTO MULTIPURPOSE **TEST AND** MEASURING INSTRUMENTS.














Why lug a scope around? Toss one of our modules into your laptop case or tool kit. For a multi-purpose test device, plug to a PC parallel port and use the PC screen. Continuous, delayed, or triggered sweeps can be frozen on the screen, printed out, or saved to disk. Frequency Spectrums DC to 25 MHz.

Allison now provides PICO TECHNOLOGY Ltd. portable test equipment, including high-speed scopes. and multi channel data loggers. Pico and O-Scope modules accept standard probes and work with 286 or faster PC's.

FEATURES:

- PORTABLE UNITS TO 25
- USES PRINTER PORT
- USES STD. PROBES

OPTIONS:

- PROBE SETS
- AUTOMOTIVE PROBES
- BATTERY PACKS
- SOFT & HARD CASES

O-Scopes Made in U.S.A. Picos Made in U.K. Same Day Shipping Includes Cable, Software & Manuals

O-Scope Ip (DC-50KHz, single trace)\$189. O-Scope II (DC-500KHz, dual trace) \$349.
PICO (ADC 200/20) (DC-10MHz, dual trace) CALL
PICO (ADC 200/50) (DC-25MHz, dual trace) CALL PICO pc based data loggers from \$99.

Shipping within U.S. UPS Ground \$7.50 (Second day \$11.50)

SEND CREDIT CARD INFO., M.O., or CHECK, OR CALL

1-800-980-9806

Allison Technology Corporation

8343 CARVEL, HOUSTON, TX. 77036 U.S.A. PHONE: 713-777-0401 FAX: 713-777-4746 BBS: 713-777-4753

http://www.atcweb.com

BOSSMAN ELECTRONICS
WE ARE IN THE YEAR 2000 OLYMPIC CITY SYDNEY IN AUSTRALIA,
PH:011 61 2 95843562, Fax:011 61 2 95843561, All prices US\$. Typical
Insured Air Mail: \$10-\$20, PAYMENT BY MAJOR CREDIT CARDS ONLY



IR ILLUMINATOR KITS: 10 LED \$9 30 LED \$20

FM TRANSMITTER Self contained, tunable, powered by a single LR44/G13 1.5V battery, \$3C 15g, 1.3" X 0.9" X 0.4".

TWO CHANNEL UHF REMOTE CONTROL On US frequency of 318MHz transmitter is assembled, \$35 kit, includes two 12V/12A relays, 1Tx + 1Rx kit:\$35, additional Tx: \$12

TIME LAPSE RECORDING INTER-FACE KIT, Has relay outputs to switch VCR or connect via a remote control:\$25 An alarm system output can be used to trigger record / stop. Unit automatically times out without

movement. PIR modules for:\$10

Used 25mm fiber optic tube plus an EHT power supply kit to suit. With no blemishes or with small side blemish. \$70

UHF DATA TRANSMISSION Stamp sized Xtal locked 433.9MHz superhetrodyne receiver module \$27

Small matching transmitter kit: \$8

LASER TUBES US made 2-4mW He-Ne Laser head plus a potted (110V-220V) power supply to suit.

Complete 5mW-650nM Laser pointer kit: \$15 Complete 10mW 640nM Laser pointer kit: \$48 Ready made 5mW-650nM Laser pointer: \$22 Ready made 5mW-650nM Laser module:\$21

MORE KITS- DUAL STEPPER MOTOR DRIVER KIT with optoisolation, with two used motors & software: \$40...DOG SILENCER KIT includes Piezo Tweeter: \$25...ALCOHOL BREATH TESTER KIT: \$30...GEIGER COUNTER KIT: \$30...BUG SIZED FM TRANSMITTER KIT: \$9...ASER BEAM COMMUNICATOR KIT: Tx-Rx + IR or Visible Laser: \$39...20A-DC MOTOR SPEED CONTROLLER uses Ti494 IC + PR mosfet, efficient switching design: \$15...TWO MOTOR AUDIO LASER SCANNER KIT makes wild patterns:\$35

THIS IS JUST A SAMPLER OF THE PRODUCTS ON SALE AT WWW/World.net/~bossman

EPROM Emulator

Sockit Rockit

27C128 27064

The SR256 EPROM Emulator can emulate 8K x 8 to 32K x 8 120 ns EPROMs, with features that provide embedded code developers increased productivity. Advantages include: software selectable device size and target address; download verify; Hex, S-Record and binary file support; status LED; dual polarity reset outputs and single device bus loading.

INCLUDES

- PC Software and Quick Start Manual
- Table Assembler supporting common 8-bit micros
- PC Parallel Port Adapter and 7 ft. Interface Cable
- · Reset Jumper Wire

*Shipping and handling not included. VISA, MasterCard, Discover and AmEx accepted.

Wisch Communications

2550 Trinity Mills Road Suite 132B Carrollton, TX 75006

Ph: (972) 417-3533 Fax: (972) 417-3821 wischcom@cyberramp.net

Synthesized FM Stereo Transmitter



Microprocessor controlled for easy frequency programming using DIP switches, no drift, your signal is rock solid all the time - just like the commercial stations. Audio quality is excellent, connect to the line output of any CD player, tape deck or mike mixer and you're on-the-air. Foreign buyers will appreciate the high power output capability of the FM-25; many Caribbean folks use a single FM-25 to cover the whole island! New, improved, clean and hum-free runs on either 12 VDC or 120 VAC. Kit comes complete with case set, whip antenna, 120 VAC power adapter - easy one evening assembly.

FM-25, Synthesized FM Stereo Transmitter Kit.......\$129.95



Tunable FM Stereo Transmitter

A lower cost alternative to our high performance transmitters. Offers great value, tunable over the 88-108 MHz FM broadcast band, plenty of power and our manual goes into great detail outlining aspects of antennas, transmitting range and the FCC rules and regulations. Connects to any cassette deck, CD player or mixer and you're on-the-air, you'll be amazed at the exceptional audio quality! Runs on internal 9V battery or external power from 5 to 15 VDC, or optional 120 VAC adapter. Add our matching case and whilp antenna set for a nice finished look.

FM-10A, Tunable FM Stereo Transmitter Kit. \$34.95 CFM, Matching Case and Antenna Set \$14.95

RF Power Booster Amplifier



Add some serious muscle to your signal, boost power up to 1 watt over a frequency range of 100 KHz to over 1000 MHz! Use as a lab amp for signal generators, plus many foreign users employ the LPA-1 to boost the power of their FM Stereo transmitters, providing radio service through an entire town. Power required: 12 to 15 volts DC at 250mÅ, gain of 38dB at 10 MHz, 10 dB at 1000 MHz. For a neat, professionally finished look, add the optional matching case set.

 LPA-1, Power Booster Amplifier Kit.
 \$39.95

 CLPA, Matching Case Set for LPA-1 Kit.
 \$14.95

 LPA-1WT, Fully Wired LPA-1 with Case
 \$99.95



Micro FM Wireless Mike

Crystal Controlled Wireless Mike



Super stable, drift free, not affected by temperature, metal or your body! Frequency is set by a crystal in the 2 meter Ham band of 146,535 MHz, easily picked up on any scanner radio or 2 meter rig. Changing the crystal to put frequency anywhere in the 140 to 160 MHz range-crystals cost only five or six dollars. Sensitive electret condensor mike picks up whispers anywhere in a room and transmit up to 1/4 mile. Powered by 3 volt Lithium or pair of watch batteries which are included. Uses the latest in SMT surface mount parts and we even include a few extras in case you sneeze and loose a part!



Super Pro FM Stereo Radio Transmitter



A truly professional frequency synthesized FM Stereo transmitter station in one easy to use, handsome cabinet. Most radio stations require a whole equipment

rack to hold all the features we've packed into the FM-100. Set frequency easily with the Up/Down freq buttons and the big LED digital display. Plus there's input low pass filtering that gives great sound no matter what the source (no more squeals or swishing sounds from cheap CD player inputs!) Peak limiters for maximum 'punch' in your audio - without over modulation, LED bargraph meters for easy setting of audio levels and a built-in mixer with mike and line level inputs. Churches, drive-ins, schools and colleges find the FM-100 to be the answer to their transmitting needs, you will too. No one offers all these features at this price! Kit includes cabinet, whip antenna and 120 VAC supply. We also offer a high power export version of the FM-100 that's fully assembled with one watt of RF power, for miles of program coverage. The export version can only be shipped outside the USA, or within the US if accompanied by a signed statement that the unit will be exported.

FM-100, Professional FM Stereo Transmitter Kit \$299.95 FM-100WT, Fully Wired High Power FM-100. \$429.95

AM Band Radio Transmitter



Ramsey AM radio transmitters operate in the standard AM broadcast band and are easily set to any clear channel in your area. Our AM-25, 'pro' version, fully synthesized transmitter features easy frequency setting DIP switches for stable, no-drift frequency control, while being jumper setable for higher power output where regulations allow. The entry-level AM-1 uses a tunable transmit oscillator and runs the maximum 100 milliwatts of power. No FCC license is required, expected range is up to 1/4 mile depending upon antenna and conditions. Transmitters accept standard line-level inputs from tape decks. CD players or mike mixers, and run on 12 volts DC. The Pro AM-25 comes complete with AC power adapter, matching case set and bottom loaded wire antenna. Our entry-level AM-1 has an available matching case and knob set for a finished, professional look.

	Professional AM Transmitter Kit\$129.95
AM-1	Entry level AM Radio Transmitter Kit\$29.95
Cam	Matching Case Set for AM-1\$14.95
Outil	matering case set for the

Tone-Grabber Touch Tone Decoder / Reader



Reader
Dialed phone numbers, repeater codes, control codes, anywhere touchtones are used, your TG-1 will decode and store any number it

hears. A simple hook-up to any radio speaker or phone line is all that is required, and since the TG-1 uses a central office quality decoder and microprocessor, it will decode dejdist at virtually any speed! A 256 digit non-volatile memory stores numbers for 100 years - even with the power turned off, and an 8 digit LED display allows you to scroll through anywhere in memory. To make it easy to pick out numbers and codes, a dash is inserted between any group or set of numbers that were decoded more than 2 seconds apart. The TG-1 runs from any 7 to 15 volt DC power source and is both voltage regulated and crystal controlled for the ultimate in stability. For stand-alone use add our matching case set for a clean, professionally finished project. We have a TG-1 connected up here at the Ramsey factory on the FM radio. It's fun to see the phone numbers that are dialed on the morring radio show!

Although the TG-1 requires less than an evening to assemble (and is fun to build, tool), we ofter the TG-1 fully wired and tested in matching case for a special price.

TG-1, Tone Grabber Kit	. \$99.95
CTG, Matching Case Set for TG-1 Kit	. \$14.95
TG-1WT, Fully Wired Tone Grabber with Case	
AC12-5, 12 Volt DC Wall Plug Adapter	\$9.95

60

Perfect video transmission from a transmitter you can hide under a quarter and only as thick as a stack of four pennies- that's a nickel in the picture! Transmits color or B&W

The Cube World's Smallest TV Transmitter



up to 150' to any TV tuned to cable channel 59 with a solid 20 mW of power. Crystal controlled for no frequency drift with performance that equals law enforcement models that cost hundreds more! Deluxe model includes sound using a sensitive built-in mike that will hear a whis per 15 feet away! Units run on 9 volts and hook-up to most any CCD camera. Our cameras shown below have been tested to mate perfectly with The Cube and work great. Fully assembled.

C-2000 Video Transmitter Cube\$89.95
C-3000 Video and Audio Transmitter Cube\$149.95



CCD Video Cameras

If you're looking for a good quality CCD board camera, stop right here! Our cameras use top quality Japanese Class

'A' CCD arrays, not the off-spec arrays that are found on many other cameras. You see, the Japanese suppliers grade the CCDs at manufacture and some manufacturers end up with the off-grade chips due to either cost constraints or lack of buying 'clout'. These cameras have nice clean fields and excellent light sensitivity, you'll really see the difference, and if you want to see in the dark, these are super IR (Infra-Red) sensitive! Available with Wide-angle (80%) or super slim Pin-hole style lens. Both run on 9 VDC and produce standard 1 volt p-p video. Add one of cur transmitter units for wire-less transmission to any TV set, or add our Interface board (below) for Audio sound pick-up and direct wire connection to any Video monitor or TV video/audio input jacks. Fully assembled.

CCDWA-2 CCD Camera, wide-angle lens	99.95
CCDPH-2 CCD Camera, slim fit pin-hole lens	\$99.95
IR-1 IR Illuminator Kit	\$24.95



CCD Camera Interface Board

Here's a nifty little kit that eases hook-up of your CCD camera module to any video monitor, VCR or video input TV set. The board provides a voltage regulated and filtered source to power the camera (CCD Cameras require a stable source of power for best operation), sensitive electret condensor mike for great sound pick-up and RCA Phono jacks for both audio and video outputs. Runs on 11 - 20 VDC.

IB-1 Interface Board Kit.....\$14.95

Call for our Free Catalog!

793 Canning Parkway Victor, NY 14564

Order Toll-free: 1-800-446-2295
Sorry, no tech info or order status at this number

Technical Info, Order Status
Call Factory direct: (716) 924-4560
www.ramseyelectronics.com









ORDERING INFO: Satisfaction Guaranteed. Examine for 10 days, if not pleased, return in original form for refund. Add \$6.95 for shipping, handling and insurance. Orders under \$20, add \$3.00. NY residents add 7% sales tax. Sorry, no CODs. Foreign orders, add 20% for surface mail or use credit card and specify shipping method.

EARN MOR MONE



No costly school. No commuting to class. The Original Home-Study course prepares you for the "FCC Commercial Radiotelephone License." This valuable license is your professional "ticket" to thousands of exciting jobs in Communications, Radio-TV, Microwave, Maritime, Radar, Avionics and more...even start your own business! You don't need a college degree to qualify, but you do need an FCC License.

No Need to Quit Your Job or Go To School This proven course is easy, fast and low cost! GUARANTEED PASS-You get your FCC License or money refunded. Send for REE facts now. MAIL COUPON TODAY!

Or, Call 1-800-932-4268 Ext. 210

COMMAND PRODUCTIONS	C	OM	MAI	D	PR	OD	U	CT	NOI	9	
---------------------	---	----	-----	---	----	----	---	----	-----	---	--

FCC LICENSE TRAINING, Dept. 210 P.O. Box 2824, San Francisco, CA 94126 Please rush FREE details immediately!

NAME		
ADDRESS		
CITY	STATE	7IP

TEKTRONIX 465M SCOPE

AN/USM-425 militarized DC-100 MHz dualtrace oscilloscope with 8x10 CM display. Deflection 5 mv to 5 V/div in 10 calibrated steps, 1-2-5 sequence + vernier. Modes: TRIG View, 20 MHz BW, CH 1, ALT, Add, Chop, CH 2 or X-Y. Sweep 0.05 usec - 0.5 s/div in 22 steps +



vernier; delay 0.05 us - 50 ms/div. Also X10 magnifier, adjustable handle, cover & manual coy. 100-132/200-264 VAC 48-440 Hz; 7x1.7x21.5, 32 lbs. USED-CHECKED, \$475.00

O-135 VDC 15 A Supply



PP-1459A BATTERY CHARGER, used to charge storage batteries; produces unregulated 0-135 VDC 15 amp output from 115/230 VAC 50-60 Hz 15 amp input. Has 2.5" dia meters 0-150 VDC and 0-20 amps DC, Coarse & Fine 12-step controls, plus 115/ 230 V input selector. Input - Output each have circuit breaker; with power cord. 12x11x12, 60 lbs sh. Used. \$49.50

Lifting Body Balloon

Distress-orange inflatable "manta ray" shaped balloon measures about 8 feet nose-to-tall, wing-tip-to-wing-tip; 3 feet at thickest. Intended to be helium-filled to raise a wire antenna for air-sea rescue transmitter. Slight breeze lifts it



much easier than round balloon even when air-filled. Nice experimental; 3 lbs sh. #SEB-42-ALV, unused, \$25.00

ANTENNA TETHER WIRE



306 FOOT SPOOL of vinyl-covered braided #22-size antenna wire intended for use with above kite or with balloon; usable as long wire antenna also. On spool; 3 lbs sh. #SEB-400X3, unused, \$12.95

Prices F.O.B. Lima, Ohio. VISA, MASTERCARD Accepted. Allow for shipping charges. Write for latest Catalog. Address Dept. ES . Phone 419/227-6573 . Fax 419/227-1313 E-Mail: fairadio@wcoil.com Home Page: http://alpha.wcoil.com/~fairadio/

> FAIR RADIO SALES Box 1105 • LIMA, OHIO • 45802

AT GREAT PRICES

Complete Ruby Laser Assembly less than \$300 He-Ne Lasers, complete, for less than \$50 American 60X Argon Lasers from \$595 Laser Diode Modules from under \$40 X-Y Scanners from \$79

FREE CATALOG

- · Helium-Neon
- · Ruby Lasers
- Argon Lasers
- Scanners

- Diode Lasers
- · Lightshow Equipment
- · Holography · Books
- · Pointers · Optics

Email: mlp@nlenx.com

http://www.midwest-laser.com



Midwest Laser Products P.O. Box 262, Frankfort, IL 60423 VISA / MC Accepted Phone: (815) 464-0085 FAX: (815) 464-0767

ALFA ELECTRONICS, INC.

- HIGH QUALITY TEST EQUIPMENT PROVIDER

1-800-526-2532 (526-ALFA)

15 Days Money Back Guarantee!



DMM

DMM-89S (\$179.00): true rms, AC/DC (V,A), Q, bar graph, freq, capac., dBm, logic, diode DMM-88S (\$149.00): AC/DC (V,A), Ω, bar graph, freq, capac., logic, diode

DMM-20 (\$74.95): AC/DC (V, A), Freq, cont., Capac, Induct., Ω, hFE, diode, duty cycle DMM-22 (\$89.95): 4000counts, bar graph, Freq, AC/DC(V,A), Ω, Capacitance, diode, contin DMM-23T (\$99.95): 41/2 digit, true rms, high resol

(10μV, 10nA, 10mΩ), hFE, diode, contin. DMM-10 (\$19.95): 31/2 digit, DC/AC V, Ω, hFE, diode, signal output(+3V,-0.5Vsq.,50%duty)

DMM-113 (\$24.95): Pocket Size, DC/ACV, Ω, diode, Continuity beeper

DMM-120 (\$24.95): economy type, DCV, ACV, DCA, O, hFE, diode

DMM-122 (\$59.95): DC/AC(V,A), Ω, hFE, diode capacitance, freq, logic, continuity

DMM-123 (\$44.95): DMM + capacitance, DC/AC(V,A), Ω, hFE, diode, continuity DMM-124 (\$69.95): Electrical+Temp,DC/ACV, Ω, capacitance, freq, 3 phase, diode, contin. DMM-125C (\$54.95): Autorange + bar graph, DC/ACV, Cap,Ω, diode, continuity beeper



-W

0 0 0

0000

LCR METER

diode test. New Model.

LCR-814 /\$189 95: 0 luH-200H

0.1pF-20mF, $1m\Omega$ -20M Ω , Q Factor, dissipation, zero adjust

LCR-131D (\$229.95): autorange, 0.1μH-10kH, 0.1pF-10mF, 1mΩ-10MΩ, Q Factor, serial/parallel, 120Hz/1kHz testing mode.

FREO. COUNTER

FC-1200 (3729.95): 1.25GHz Handheld, 8 digits display, 10ppm accurary, sensitivity 5mV (130-350MHz), 30mV (440MHz), 2zmV (800MHz), batteries or 97 adapter. FC-2500 (\$179.95): 2.5GHz Handheld, 8 digits display, 4ppm accurary, sensitivity <50mV, batteries or 9V adapter. CAP-15 (\$49.95): 3½ digit, 0.1pF-20mF, 9 Ranges, 0.1pF resolution zero adjustment. LCR-24 (3139.95): 0.1μH-200H, 0.1pF-2000μF, 0.01Ω-20MΩ,

FC-5270A (\$149.95) 1.2 GHz bench type, 8 digit, 10 ppm, 35mV sensitivity, 10Vp-p max. input, power by 9V adapter.

FC-5700 (\$329.95) 1.3GHz bench type, 8 digit, 1 ppm accuracy, 20mV sensitivity, period 0.1µs to 100ms. Ideal for test & repair of



FLUKE DMM

HandHeld	Scope Meter			
12B \$ 84.95	92B-III \$1,445			
70-III \$ 85.00	96B-III \$1,695			
73-III \$115.00	99B-III \$2,095			
75-III \$139.00	105B \$2,495			
77-III \$154.00	123-III \$945			
79-III \$175.00	863E \$475			
\$289.00	867B \$650			
87-III \$309.00				

AUDIO/RF/FUNCT.

GENERATOR

SPECIALTY METERS

\$65554555555555555555555555555555	
• Sound meter \$169.95	
EMF Tester \$69.95	· High Voltgae Probe
· Conductivity \$169.95	\$59.95
• Thermometer	• pH Meter \$79.95
\$69.95-\$89.95	· Light Meter \$80-\$90
· Humid/Temp meter	
	 Anemometer \$179.95
Press. meter \$299.95	
Electr. scale \$89.95	(And More) \$89.95

OS CILLOS COPE

C 111

10 C C 10

0)1.0)

-000

Dual Trace, Component Test, 6" CRT, X-Y Operation, TV Sync, CH2 Output, Graticule Illum, 2 Probes(x1;x10)

PS-200 20 MHz Dual Trace PS-205 20 MHz Dual w/ Delay Sweep \$429.95 PS-400 40 MHz Dual Trace \$494.95
 PS-405 40 MHz Dual w/ Delay Sweep \$569.95 PS-605 60 MHz Dual w/ Delay Sweep \$769.95 · PS-1000 100MHz Dual Trace

Digital Scope:

DS-303 30MHz Digital, 20 Samples/sec \$849.95

DS-303P RS-232 interface, 30MHz \$1,049.95

Scope Probe: HP-9060 (60MHz) \$15, HP-9150 (150MHz) \$22,

80

• SG-4160 (\$124.95) 100kHz-150MHz sinewaves in 8 ranges, 100mV at 35MHz

• SG-4162 (\$229.95): same as SG-4160, plus 6 digits int/ext freq. counter (150MHz). Audio Generato

· AG-2601 (\$124.95)10Hz-1MHz, 0-8Vpp

sine, 0-10Vpp squarewave
• AG-2603 (\$229.95): same as AG-2601, plus 6 digits int/ext freq. counter (150MHz). **Function Generato**

• FG-2100A(\$169.95).2Hz-2MHz,5mV-20Vpp

• FG-2102AD (\$229.95) same as FG-2100A, plus int. counter and TTL, CMOS output. FG-2103 (\$329.95) Sweep 0.5Hz-5MHz, linear/log, VCG, GCV, 6 dig. int/ext count

POWER SUPPLIES

HP-9250 (250MHz)\$29, HP-9258 (250MHz,100:1)\$39 Single Output DC Power Supplies

- · Short Circuit and overload protected
- Constant current, constant voltage mode

Analog Meters Display PS-303 (\$159.00) 30V/3A PS-305 (\$219.95) 30V/5A

PS-8110 (\$289.95) 60V/3A PS-8112 (\$399.95) 60V/5A PS-1610 (\$289.00) 16V/10A PS-8107 (\$399.95) 30V/10A

 0.02%+2mV line regulation; 0.02%+2mV load regulate Digital Voltage, Analog Current PS-8200 (\$179.95) 30V/3A PS-8201 (\$239.95) 30V/5A

> Digital Volt & Current Display PS-8300 (\$199.95) 30V/3A PS-8301 (\$259.95) 30V/5A

Dual Tracking

- · Short Circuit & overload protected
- Constant current & voltage mode

Independent or Tracking Dual Tracking (Analog V & I Displays) PS-303D (\$314.95) 30V/3A/30V/3A

PS-305D (\$399.95) 30V/5A/30V/5A PS-8108 (\$549 95) 60V/3A/60V/3A PS-8109 (\$699.95) 60V/5A/60V/5A

Triple Output

· One fixed 5VDC, 3 Amp output · Parallel to double current output (PS-8102 & PS-8103 only)

Triple Output (Analog displays) PS-8102 (\$399.95) 30V/3A/30V/3A PS-8103 (\$489.95) 30V/5A/30V/5A Digital Displays
PS-8202 (\$499.95) 30V/3A/30V/3A

PS-8203 (\$549.95) 30V/5A/30V/5A

GW/INSTEK®

Test & Measuring Instrument

ISO 9002 Cert. #934163 (2 Years Warranty)

OSCILLOSCOPE

OS-658G \$849.95 OS-622G \$369.95

DC POWER SUPPLIES

Single Output Programmable

FUNCTION GENERATOR

BENCHTOP **DMM**



- Dual CH / Delay sweep
- Readout a Cursor meas
 Built-in delay line Z-axis input, CH1 output TV syn., trigger level lock
- 2 probes (x1, x10)

- Dual CH/X-Y operation · 1 mV/div sensitivity Z-axis input,CH1 output
- TV syn., trigger level lock 2 probes (x1, x10)

OS-305 (\$229.95) - 5 MHz One Channel OS-310 (\$324.95) - 10 MHz One Channel



Triple Output

- 2 variable out 0-30V.0-3A One fixed 5V.3A output
- · Auto track, serial, parallel · Const. volt, current mode 4 analog or 2 digital display

PC-3030 (\$499.95) PC-3030D (\$549.95)



- Const voltage, current mode
 Voltage regulation ≤0.01% · Current regulation ≤0.2%
- PS: 2 analog or 1 digital disp PR: 2 analog or 2 digital disp •

Analog Meters Display PS-1830 (\$209.95) 18V/3A PS-1850 (\$229.95) 18V/5A

PS-3030 (\$219.95) 30V/3A PS-6010 (\$209.95)60V/10A

PR-3060 (\$329.95)30V/6A PR-6030 (\$329.95)60V/3A PR-1810H(\$349.95)18V/10A Digital Meters Display PS-1830D(\$229.95)18V/3A

PS-1850D(\$254.95)18V/5A

PS-3030D(\$254.95)30V/3A

PR-6030D(\$399.95)60V/3A

High stability, low drift

One fixed 5V,3A output 100point program(PPS ser) 50point program(PPT ser.) Auto serial/parall (PPT ser) Auto track (PPT series), IEEE-488.2 and SCP1 compatible command set (optional)

PPS-1860G (\$1.149.95) PPS-3635G (\$1,149.95)

PPS-6020G (\$1,149.95) PPT-1830G (\$1,499.95) PPT-3615G (\$1,499.95)



FG-8015G(\$179.95)Sweep 0.02Hz-2MHz,no counter Sine/Squ/Tri/pulse/Ramp

FG-8016G (\$239.95) 0.02Hz-2MHz w/ counter Pulse, function generator FG-8017G(\$249.95)Swee Sine/Tri/Squ/TTL/CMOS 0.02Hz-2MHz, FM mod. FG-8019 (\$399.95) Sweep • 0.02Hz-2MHz w/counter

· INT/EXT AM/FM mod FG-8020G (\$209.95) • 0.02Hz-2MHz

FG-8050 (\$499.95) Sweep • 0.05Hz-5MHz w/counter • INT/EXT AM/FM mod FG-830G (\$1,799.95) 30MHz - 20mHz Freq. resolution Synthesized Function Gen. Output: sine, tin, square, sync out, arb. waveform - R5232; IEEE-488(option



DM-8034(\$179.95) 31/4 dgt • AC/DV(V,A),C,Ω,diode • 1000V, 20A, 0.5% accu. DM-8040(\$339.95) 334 dgt · ACV to 50kHz, true rms

DM-8055(\$649.95) 51/2 dgt 0.006% basic accuracy 1μV,1mΩ,1nA resolution dBm,auto,REL, min/max DM-8055G(\$889.95)GPIB • Same funct, as DM-8055

Intelligent Counters FC-8131 (\$469.95)1.3GHz FC-8270 (\$629.95)2.7GHz UC-2010G (\$294.95)



Auto-set Cursor Read-out Oscilloscope 100 Miz 05-6102 *NEW * \$1349.95

- Dual channels
- Auto-set for parameter selection
- Automatic Peak to Peak Memory for 10 user-defined settings
- RS-232 Remote control Triggering DC~250 MHz
- Alternate trigger Component tester



TEL: (800)526-ALFA(2532) / (609)897-1135 FAX: 609-897-0206 E-mail: alfa0168@aolcom





ONLY COOL-AMP **SILVERPLATES** ON THE JOB.

From a customer testimonial:

"Ok, your edge connectors don't connect. Or you want to plate your own PC creations, but you don't want to bother with electro-plate solutions. The plating on the socket...has worn off and no longer makes reliable contact...what are you going to do now?

"Give the people at Cool-Amp a call. They have a silver plating compound I have used for the past couple of years that solves all of the above problems and more. This white powder has an infinite shelf life...and is easy to use.

"It will actually put a permanent silver plate on copper. brass or bronze...There are no messy or dangerous chemicals. Application could not be easier. Use a clean rag and a little bit of water and just rub it on a clean surface. In minutes you can permanently silver plate a circuit board or replate a power amp tube or socket.

"It has saved me time, money and my sanity."

Cool amp has even outperformed electroplating in recent tests. It is time-proven since 1944.



AND CONDUCTO-LUBE. THE SILVER-BASED CONDUCTIVE LUBRICANT.

The upstart, since 1952. Developed for switches, uses continue to expand to all applications needing a conductive lubricant.



ORDER FACTORY DIRECT: 503-624-6426 or FAX 503-624-6436

http://www.thomasregister.com/cool-amp

WORLD'S SMALLEST

LIHF X-tal Locked Video Transmitters \$99.00

So small the transmitter, camera and battery will fit into a cigarette pack!!!

Used by hundreds in covert CCTV, R/C models, movie Special Effects, and Law Enforcement. "I've utilized your transmitters in covert video installations for about one year... previously, I used costly wireless units from Pelco, MVP, and Supercircuits. Nothing

approaches the VidLinks in terms of power, picture quality, size, and value. Thank you. R. Leslie, CCTV Installer, NY. "Incredible color, resolution... easy to use

convenient.Very cool. " P. Davis, "Props, C/ "... like having a TV station in your pocket." J. Ramsay, Electronic Horbbyist, FL.

ACTUAL SIZE!!!

VidLink 100: 100mW Power-upto 1/4 Mile \$199.00 New! High-Power!

VidLink 15: 15mW Power- upto 150 Feet \$99.00 New! Low Price- Same Size! Covert Camera: 1 1/4" sq. Pinhole Lens \$169.00 Pro Grade Japanese Quality! *** Audio Module Now Available. Call. ***

Check/MO, COD +\$5.00, S&H \$5.50

AEGIS

#671-1225 E. Sunset Dr. Bellingham, WA 98226-3529 USA

4EGIS

VidLink 100

UHF Micro Wireless Video Transmitter CATV 59

1-604-224-0416


Visit our virtual catalog on the INTERNET at: http://www.lynx.bc.ca/virtualspy

TURN YOUR PC INTO A DIGITAL STORAGE OSCILLOSCOPE!

The all new PC-MultiScope 2

10Mhz analog bandwidth!

At right: Actual scope screen as seen on your PC monitor



auto, and audio test & measurement

\$399 + S/H, Visa/MC/Check OK Add \$99 for source code option

FEATURES:

- 1. Dual channel; external triggered 2. Digital storage; Windows based
- 3. Connects to PC parallel port
- 20Megasamples/sec sampling; 10Mhz max, analog bandwidth
- 8 bit resolution/ 8K RAM buffer
- Prog. gain: 10v/div to 1mv/div
- Spectrum analyzer (fft) function
- Strip chart recorder function TTL output for control app's
- 10. Visual Basic source code avail.

The top choice of corporations, universities and scientists worldwide!

AMAZE ELECTRONICS CORPORATION amaze@hooked.net www.hooked.net/users/amaze Phone: 800-996-2008 Fax: 408-374-1737

MCM Electronics®

These pre-assembled circuit modules are ideal for repairing or refurbishing old equipment, prototype work or hobby applications. MCM stocks many modules not listed here. For complete information, contact your MCM Sales Representative.

Disc

Programmable LCD

One or two line x 16 character display is fully programmable and stores up to 14 alpha numeric messages. Backlit display allows

viewing in any light. Messages can be

individually displayed by closing specific

programming, similar to that of VCR or

many units. Requires 12VDC, 300mA.

Two line

Description

contacts on terminal strip mounted to the

camcorder text. Data can be sent between

board. Programming is easily done via a menu

multiple units to allow fast programming of a

Single line

The Source For All Of Your Electronics Needs To take advantage of special pricing on the items listed, please provide this code:

SOURCE CODE: ENS46

For over 20 years, MCM has been the leading supplier to the electronics service industry. Huge inventory, rapid delivery and competitive prices have made MCM the choice for:

- · Hobbyists
- · Service Technicians
- · Educators

\$115.00

140.00

· Installers

Discover the MCM difference, call today for your free catalog.

Prices Effective April 2 through May 29, 1998



One Watt Single Channel Audio Amplifier

Accepts line level input, 50mV, 100Kohm. Output impedance 4~80hm. Operates with supply voltage from 4~14VDC, 200mA. Optimum 12VDC. Board dimensions 50mm x 35mm x 20mm. Many larger amplifier modules are available.

Order #	(ea.)
28-4795	\$7,49



Microphone Preamp Module

28-4805

May be used any amplifier with line level input. Gain is adjustable via board mounted potentiometer. Input level 560ohm, 5mV. Output level 1Kohm, 300mV. Operates with supply voltage from 6~18VDC, 5mA. Board dimensions 50mm x 35mm x 20mm.

Order # (ea.)





FM Transmitter

Order #

28-4765

28-4766

Accepts line level input (300mV), and transmits audio to any standard FM radio. Output frequency can be adjusted anywhere in the 88~108MHz FM band. Requires 9~15VDC supply, 150mA. Board dimensions 50mm x 65mm x 20mm.

Order #	(ea.)
28-4851	\$24.95

Two Digit

Provides digital count from 0 to 99. Contact closure input provides one count up and

reset-to-zero function. Each digit is 0.5" high. Requires 12VDC, 100mA. Dimensions 70mm x 52mm x 46mm.

Order #	(ea.)
28-4785	\$14.95



Voice Activation (VOX) Relay

5A output relay is energized when audio signal level is detected. Input level 50mV, 10Kohm. Sensitivity is adjusted via a board mounted potentiometer. Requires 12VDC, 50mA. Board dimensions 75mm x 40mm x 30mm.

Order #	(ea.)
28-4825	\$17.95



On Delay Timer Module

Provides precision time delay for a variety of uses. Upon contact closure, the output relay remains open, until a predetermined amount of time passes, then closes. The relay remains closed for a predetermined amount of time, then opens again. Both predetermined times are independently adjustable by two board mounted potentiometers. Relay contacts 5A. Requires 12VDC, 500mA. Board dimensions 43mm x 75mm x 30mm.

Order #	Delay Time	(ea.)
28-4750	1~180 second	\$19.95
28-4751	2~45 minute	19.95



Need a convenient power supply?

This 13.5VDC, 1 amp AC adaptor is perfect for many hobby applications.

Order #	(ea.)
58-3330	\$3.99

1-800-543-4330

\$8.95

www.mcmelectronics.com

Hours: M~F 7 a.m.~9 p.m., Sat. 9 a.m.~6 p.m., EST.

Same Day Shipping!

In stock orders received by 5:00 p.m. (YOUR TIME), are shipped the same day.



MCM ELECTRONICS® 650 CONGRESS PARK DR. CENTERVILLE, OH 45459

A PREMIER FARNELL Company

SOURCE CODE: ENS46

C&S SALES EXCELLENCE IN SERVICE

LOOK FOR OTHER MONTHLY SPECIALS ON OUR WEBSITE

XK-700 Digital / Analog Trainer

Elenco's newest advanced designed Digital / Analog Trainer is specially designed for school projects. It is built on a single PC board for maximum reliability. It includes 5 builtin power supplies, a function generator with continuously sine, triangular and square waveforms and a 1560 tie point bredboard area. Tools and meter shown optional. (Mounted in a professional tool case made of reinforced metal).

Assembled and Tested 89 95

XK-700 - SEMI KIT w/ Fully Assembled PC Board

XK-700K - Kit



Made in the USA

Volt Alert™ By FLUKE

Volt Alert™ is the new pocket-sized AC line voltage detector from Fluke. Easy to use - just touch the tip to an outlet or cord. When it glows red, you know there's voltage in the line.

Electrician's, maintenance, service, and safety personel can quickly test for energized circuits and defective grounds on the factory floor, in the shop, or at home.

- · Fits in shirt pocket for convenience.
- All outer surfaces are unconductive for safety.

Detects voltage metallic contact. #1AC \$19.50

DIGITAL LCR METER Model LCR-1810



- Capacitance .1pF to 20μF
 Inductance 1μH to 20H Resistance .01Ω to 2000ΜΩ
- · Temperature -20°C to 750°C
- DC Volts 0 20V
- Frequency up to 15MHz
 Diode/Audible
- Continuity Test
- Signal Output Function
 3 1/2 Digit Display

20MHz Sweep / Function Generator with Freq Counter

B&K 4040

- 0.2Hz to 20MHz
- AM & FM modulation
- Burst Operation External Frequency
- counter to 30MHz

Linear and Log sweep

10MHz B&K 4017 \$309 5MHz B&K 4011 \$239





Model M-6100

The M-6100 is Elenco's most sophisticated meter with almost every possible feature available. The M-6100 even has a computer interface for viewing and storing data on a personal computer. It comes complete with software, RS-232 cable, test leads and manual.

\$125

Model XP-581

(O), (c)

4 Fully Regulated DC Power Supplies in One Unit 4 DC voltages: 3 fixed - +5V @ 3A, +12V @ 1A, -12V @ 1A 1 Variable - 2.5 - 20V @ 2A

95

0).(3)



SATELLITE FINDER

Model SF-100A

- · Aligns Satelite Dishes
 - Range 950-2050MHz
 - · Audio Tone
 - · Compact Size
 - · Self Power Check

Digital Multimeter

Model M-1700

11 functions including freq to 20MHz, cap to 20μF. Meets UL-1244 safety specs.



Technician Tool Kit TK-1500



28 tools plus a DMM contained in a large flexible tool case with handles ideal for everyone on the go.

Kit Corner

over 100 kits available

AK-700 \$14 95 Phone kit with training course.

RADIO CONTROL CAR KIT



95

 7 functions Remote control included

No Soldering Required

MODEL AK-870

Model AM/FM-108K **Transistor Radio Kit**

with training course



35mm Camera Kit AK-540



The New DMM900 Series Handheld Digital Multimeters For high-performance digital multimeters that are accurate, reliable, and rugged, the DMM900

Series extends the Tektronix line of already affordable DMMs. Twice the accuracy. Up to 10 times the resolution. And a full range of capability that spans voltage, current, digital multimeters features a dual numeric display, 3-year warranty, and autoranging capability. All backed by the reliability of the Tektronix brand

Features DMM912, DMM914, **DMM916**

- 40,000 Count Display 0.06% Basic DC Volts Accuracy • 0.06% Ba (DMM916) DC Voltage Ranges from 400mV to
- 1,0000 V AC Voltage Ranges from 4V to 750V
- (True RMS) AC and DC Current Ranges from 10.000uA to 10A
- Resistance Ranges from 400Ω to 40MΩ
 Capacitance Ranges from 4nF to 40μF
- Frequency Ranges from 400Hz to 2MHz
 Temperature Measurements from
 -50°C to +980°C (DMM916, DMM914)
- 3 Year Warranty CE Marking



\$189

DMM 912 DMM 914

-88888

言語語



DMM 916 \$235 \$275

GUARANTEED LOWEST PRICES ON TEK DMMs

WE WILL NOT BE UNDERSOLD

UPS SHIPPING: 48 STATES 5% OTHERS CALL FOR DETAILS IL Residents add 8.25% Sales Tax

150 W. CARPENTER AVENUE WHEELING, IL 60090 FAX: (847) 541-9904 (847) 541-0710



15 DAY MONEY BACK **GUARANTEE FULL FACTORY WARRANTY**

Electronics Now, May 1998

C & S SALES

Your one stop source for all your electronic needs! CALL OR WRITE FOR OUR **NEW FREE 64 PAGE** CATALOG!

(800) 445-3201

Quality Scopes by Elenco

Lowest Prices of the Year!



Includes Free Dust Cover and **Probes**



B & K PRECISION SCOPES

Fluke Scopemeters

123....NEW.....\$950

92B.....\$1445 96B.....\$1695

99B...NEW....\$2095

105B.....\$2495

ALL FLUKE

PRODUCTS ON SALE

100MHz THREE-TRACE

Model 2190A

11211

\$1295.00

60MHz DUAL-TRACE

- **Model 2160**

- 1mV/division sensitivity
 Sweeps to Sna/division
 Dual time base
 Signal delay line
 V mode-displays two signals unrelated in frequency,
 Component tester

\$895.00

40MHz DUAL-TRACE Model 1541C

- 1mV/division sensitivity
 Video sync separators
 Z-axis input
 Single Sweep
 V mode displays two signitated in frequency

60MHz, CURSORS & READOUTS, DUAL TIME BASE

Model 2260

- Cursors and readouts

 Cursors and readouts

 Im/Valfv sensitivity

 23 calibrated ranges main time base

 19 calibrated ranges main time base

 19 calibrated ranges desiyed time base

 Signal delay time

 V-mode displays 2 signals unrelated in frequency,

 Component tester

 Z-axis input

 Single saveep

 - - - \$1225

20MHz DUAL-TRACE Model 2120B - 2 Year Warranty Special \$375

Model 2125A with delayed sweep

Affordable Spectrum Analyzers by B&K

\$539.95

1.05GHz Series

odel 2625 - \$2395 Model 2630 w/ tracking



500MHz Series

odel 2615 - \$1595

Model 2620 w/ tracking

- 1mV/division sensitivity AUTO/NORM triggered sweep operation AC, TVH, TVV and line coupling Calibrated 19 step time-base with x10

60MHz

- DS-603 \$1350
- Analog / Digital Storage
- 20MS/s Sampling Rate

\$749 S-1360

Analog with Delayed Sweep

100MHz

S-1390 \$995

Analog

40MHz

\$569 S-1345

· Analog with Delayed Sweep

\$475 S-1340

· Analog

2 Year Warranty

MX-9300

Four Functions in One Instrument

25/30MHz

DS-303 30MHz \$1095

DS-203 20MHz \$725

· Analog / Digital Storage

S-1330

- 25MHz Analog
- Delayed Sweep

\$325 S-1325

25MHz Analog

SIMM MODULE TESTER B & K 898

- \$625
- Tests 72 and 30-pin SIMMs to 36 bits Stand alone and portable. No other equipment
- required.
 Automatically identifies width, depth and speed of SIMMS
- 10 built-in tests identify most memory defects.

 Preheat cycle prior to test.

PORTABLE SEMICONDUCTOR TESTER



· In or out-of-order circuit tests for transistor, FETs, SCRs and dar-

\$199.00

Fluke Multimeters

Model	70111	\$85	Model 83	\$235
Model	73111	\$115	Model 85	\$269
Model	75111	\$139	Model 87	\$289
Model	77111	\$154	Model 863E	\$475
Model	79111	\$175	Model 867BE	\$650

B&K Precision Multimeters

Model	391	\$143	Model	388A	\$99
Model	390	\$127	Model	2707	\$75
Model	389	\$109	Model	2860A	\$79
Model	5390	\$295	Model	5370	\$219
Model	5380	\$265	Model	5360	\$195

Features:

- One instrument with four test and measuring systems:
 - 1.3GHz Frequency Counter
 - 2MHz Sweep Function Generator
 - · Digital Multimeter
 - Digital Triple Power Supply
- 0-30V @ 3A, 15V @ 1A, 5V @2A



C&S SALES, INC. **GUARANTEED LOWEST PRICES**

UPS SHIPPING: 48 STATES 5% OTHERS CALL FOR DETAILS IL Residents add 8.25% Sales Tax

150 W. CARPENTER ÁVENUE WHEELING, IL 60090 FAX: (847) 541-9904 (847) 541-0710 http://www.elenco.com/cs_sales/



15 DAY MONEY BACK **GUARANTEE FULL FACTORY WARRANTY**

Small, Attractive, High End Quality, 2 Channel 318 MHz Transmitter 59,049 Settable Codes, 120'-300' Range, 1-1/4" x 2" x 9/16", Assembled

	Qty	1	5	10
	150' Range Transmitter	24.95	19.95	15.95
RF300XT	300' Range Transmitter	29.95	24.95	19.95



Small, High End Quality, 2 Channel Receiver for the RF300 Transmitters 1-1/4" x 3-3/4" x 9/16" PCB w/ .1" spaced pads for standard connectors Input: 8-24 vdc Output: Gated CMOS Momentary and Latching Lines

	Qty	1	5	10
RF300R	Receiver, Fully Assembled	24.95	20.95	16.95
RF300RK	Receiver, Complete Parts Kit	19.95	15.95	12.95
RF300PA	Pre-Amplifier, Doubles Range	14.95	11.95	9.95



Small, Economical, Single Channel Transmitter and Receiver Set Set Code, 60' Range, 1-7/8"x2-3/8"x7/16" (T), 2"x2-3/4"x9/16" (R) Receiver Input: 5 vdc Output: Gated TTL Momentary Line

	Qty	1	5	10
RF60	Transmitter and Receiver Set	24.95	19.95	14.95

Add \$ 4 shipping for first item + \$ 1 for each additional item. Ca. residents add 8.25% tax Visa, Mastercard, Money Orders Personal Checks and Cash C.O.D.s

Visitect Inc. P.O. Box 14156 Fremont, CA. 94539 (510) 651-1425 Fax (510) 651-8454

CIRCLE 317 ON FREE INFORMATION CARD

* ATTENTION CABLE VIEWERS *

CABLE VIEWERS. . . get back to your BASIC Cable Needs



Call 800-577-8775

For information regarding all of your BASIC cable needs.

- 5 GOOD REASONS TO BUY OUR FAR SUPERIOR PRODUCT
- **PRICE**
- *** EFFICIENT SALES AND SERVICE**
- *** WE SPECIALIZE IN 5, 10 LOT PRICING**
- * ALL FUNCTIONS (COMPATIBLE WITH ALL MAJOR BRANDS)
- * ANY SIZE ORDER FILLED WITH SAME DAY SHIPPING

We handle NEW equipment ONLY - Don't trust last year's OBSOLETE and UNSOLD stock! COMPETITIVE PRICING—DEALERS WELCOME

HOURS: Monday-Saturday 9-5 C.S.T.

It is not the intent of B.E.S.W. to defraud any pay television operator an we will not assist any company or individual in doring the s

CORPORATION

P.O. Box 8180 m Bartlett, IL 60103 m 800-577-8775

78



De Gorge ® The Ultimate Saving Source

LARGE VARIETY SAME DAY SHIPPING

Over 6,000 new items

SHIP UP TO 516s FOR ONLY





Audio/Video Service Parts Audio/Video Accessories Professional Audio

Security Products

Connectors

Technician Aids

Chemicals

Test Equipments

Soldering Equipment

Automotive Products

Automotive Installation Kits










«نادوادو ۱۱۰۱۱»

4225 NW 72ND AVE. MIAMI, FLORIDA 33166 TEL: (305) 716-1016 ---- FAX: (305) 594-6588 TO ORDER A CATALOG CALL "258"

1-800-325-2264

re-Owned Equipment





Model OS-9100P -- \$899.00 Full 100 MHz Bandwidth!

- Dual-Channel, High Sensitivity
- TV Synchronization Trigger
- Calibrated Delayed Sweep

Includes Two Probes, 2 Year Warranty Z

FREE SHIPPING! ON GOLDSTAR EQUIPMENT ANYWHERE IN THE U.S. Excluding AK & HI

BK PRECISION MAXTEC INTERNATIONAL CORP. Model 4040 \$499.00

20 MHz Sweep/Function Generator

- 0.2 Hz to 20 MHz, 5 digit LED Display
- AM & FM Internal or External Modulation
- Sine, Square, Triangle, TTL, CMOS Outputs
- **Burst Operation**
 - External 30 MHz Frequency Counter

Pre-Owned Oscilloscope Specials

B+K Precision 1476 10 MHz \$229.00 Great Starter Scope!

Tektronix 465 100 MHz \$599.00 Tektronix 465B 100 MHz \$699.00 Tektronix 475 \$799.00 200 MHz Tektronix 475A 250 MHz \$899.00

- The Industry Standard of Oscilloscopes
- · Dual Channel, Calibrated Delayed Sweep
- Professionally Refurbished
- Aligned & Calibrated to Original Specifications
- · 6 Month Warranty The Longest Available!

LOWEST PRICES EVER!

NEW FLUKE MULTIMETERS & TEKTRONIX OSCILLOSCOPES

The Industry Standard in Multimeters Fluke Model 87 .. \$285.00

TEKTRONIX TDS SERIES ON SALE!

See us on the Web! www.fotronic.com

P.O. BOX 708 Medford, MA 02155

(617) 665-1400 • FAX (617) 665-0780 email: afoti@fotronic.com

CIRCLE 328 ON FREE INFORMATION CARD



1-800-996-3837 C.O.D. TOLL FREE 1-800-99-METER

Are you interested in Microprocessors & Embedded

Control Systems? If not you should be! Look around, just about everything these days has an embedded microprocessor in it. T.Vs, cars, radios, traffic lights & even toys have embedded computers controlling their actions. The Primer Trainer is the tool that can not only teach you how these devices operate but give you the opportunity to program these types of systems yourself. Examples & exercises in the Self Instruction manual take you from writing simple programs to controlling motors. Start out in Machine language,

then move on to Assembler, & then continue on with optional C, Basic, or Forth Compilers. So don't be left behind; this is information you need to know!

- Measuring Temperature
- Using a Photocell to Detect Light Levels
- Making a Waveform Generator
- Examples Constructing a Capacitance Meter
- Motor Speed Control Using Back EMF Include:
 - Interfacing and Controlling Stepper Motors Scanning Keypads and Writing to LCD/LED Displays
 - Bus Interfacing an 8255 PPI
 - Using the Primer as an EPROM Programmer
 - DTMF Autodialer & Remote Controller (New!)

The PRIMER is only \$119.95 in kit form. The PRIMER Assembled & Tested is \$169.95. This trainer can be used stand alone via the keypad and display or connected to a PC with the optional upgrade (\$49.95). The Upgrade includes: an RS232 serial port & cable, 32K of battery backed RAM, & Assembler/Terminal software. Please add \$5.00 for shipping within the U.S. Picture shown with upgrade option and optional heavy-duty keypad (\$29.95) installed. Satisfaction guaranteed.

CARBONDALE,

IL 62901 BBS 529-5708

618-529-4525 Fax 457-0110 World Wide Web: http://www.emacinc.com 1985 - 1998 OVER YEARS

Are you interested in using the internet in ways you never dreamed possible? Want a war-dialer program or something to crack a password? Do you want to learn how the phone company gets ripped off, or learn how to build a red box, or modify a cellular phone? Want to see what the security holes in Windows NT are? Or how to compromise a Unix machine or a BBS? Want to learn how to use the system in ways you never imagined possible? This CD is the place to look! It contains all kinds of computer, telephone and general hacking information. Even a video of dutch hackers breaking into a classified US military computer! In all, over 600 megabytes of fascinating information that's hard to get anywhere else!

PC-COMPATIBLE CD \$29.95 SHIPPING \$3

Cryptography Unlimited CD-ROM

Cryptographic software will soon be outlawed by the US government. Get this important bundle of over 200 megabytes of cryptographic software while you still can! Nabody in the US will even dare to publish a CD like this anymore and we had to import it from Africa! Includes file encryptors, disk encryptors, PGP, steganography, code cracking PGP phone and lots more!

PC CD-ROM, \$3995 SHIPPING \$3

Call (800)719-4957 now! to order (Visa/MC/COD) or call or write for FREE CATALOG of hard-to-get information about computer viruses, computer hacking, security and cryptography!!

American Eagle Publications, Inc. P. O Box 1507, Dopt E Show Low. AZ 85901

CIRCLE 282 ON FREE INFORMATION CARD





Range: Resolution: Accuracy: 200 A 100nA 2000 A (1,2%rda+2dats) 10 A 20mA 200mA 100 A (1.2%rdg+2dgts) 10A 10mA

Overload Protection: mA Input. 2A/250V fuse.

CATNO

DESCRIPTION PRICE 9300G Rugged High Quality DMM with Rubber Boot \$19.00

200V

Meosures tronsistor hFE. Frequency Range: 45Hz-450Hz

100mV

Maximum Allowable Input: 750V rms

Response: Average Responding. Call-brated in rms of a Sine Wave.

AC Voltage (ACV)

5

\$2.75

Resolution: Accuracy.

(1.2%rdg+10dgts)

PRICE

\$99.00

20 AMP Switching Power Supply A very special Circuit Specialists offer. This 20 amp continuous switching power supply is available at

this fantastic low price! Specifications Specifications input Voltage: AC 110V +/- 15%, 50Hz/60Hz Output Voltage: DC9V 15V variable Polarity: Negative ground Current (13.8V): 25A peak, 20A continuous Overvoltage Protection

Cooling fan Inside chassis

DESCRIPTION CATNO 20 Amp Switching Power Supply SPS-1020G

> **Developer** This product is used as the developer on our positive photo-resist printed circuit boards. Includes Instructions. 50 gram package, mixes with water, makes 1 quart. PRICEEACH DESCRIPTION CATNO 1 10

POSDEV Positive Developer \$.95 \$.80 \$.50 Etching Chemicals/Ferric Chloride

dry concentrate that mixes with water to make 1 pint etchant, enough to etch 400 sq.

PRICE EACH Inches of loz board CATNO DESCRIPTION 1 \$3.50 ER-3 Makes 1 pint

CIRCUIT SPECIALISTS, INC. 1911 800-811-5203 602-464-2485

602-464-5824(FAX) WE ACCEPT:

Positive Photo Resist Pre-Sensitized
Printed Circuit Boards Winstan Care

These pre-sensitized printed circuit boards are ideal for small production runs. They provide high resolution and excellent line width control. High sensitive positive resist coated on loz. copper foll allows you to go direct from your computer plot or art work layout. No need to reverse art.

CAT NO DESCRIPTION 1 100 50 PP101 100mm x 150mm/3.91 x 5.91 \$2.55 \$1.90 \$1.0 PP114 114mm x 165mm/4.6' x 6.6' 2.98 2.45 1.9 PP152 150mm x 250mm/5.91 x 9.84' 5.40 3.98 3.98
PP114 114mm x 165mm/4.6° x 6.6° 2.98 2.45 1.9
The state of the s
DD150 150mm v 050mm/5 01" v 0.04" 5 40 2.00 2.4
PP152 150mm x 250mm/5.91" x 9.84" 5.40 3.98 3.6
PP153 150mm x 300mm/5.91" x 11.81" 6.15 4.48 4.
PP1212 305mm x 305mm/12" x 12" 12.78 10.65 8.8
Single-Sided, Toz. Copper Foil on Fiberglass Substrate PRICE EAC
CAT NO DESCRIPTION 1 10 50
G\$101 100mm x 150mm/3.91" x 5.91" \$ 3.90 \$2.98 \$2.6
GS114 114mm x 165mm/4.6" x 6.6" 4.80 3.49 3.3
GS152 150mm x 250mm/5.91" x 9.84" 8.69 5.98 5.1
GS153 150mm x 300mm/5.91" x 11.81" 10.20 7.20 6.4
GS1212 305mm x 305mm/12" x 12" 18.88 15.73 12.5
Double-Sided, 1oz. Copper Foil on Fibergiass Substrate PRICE EAC
CAT NO DESCRIPTION 1 10 50
GD101 100mm x 150mm/3.91" x 5.91" \$ 5.07 \$3.68 \$3.5
GD114 114mm x 165mm/4.6" x 6.6" 5.95 4.29 3.9
GD152 150mm x 250mm/5.91" x 9.84" 10.47 7.39 6.9
GD153 150mm x 300mm/5.91° x 11.81° 11.95 8.69 8.3
GD1212 305mm x 305mm/12" x 12" 22.09 18.35 14.0



Etching Tank This handy etching system will handle PC boards up to 8° x 9°, two at a time. Ideal for etching your PCB'sl System includes an air pump for etchant agitation, a thermostatically controlled heater for keeping etchant at optimum temperature and a tank that holds 1.35 gallons of etchant. A tight fitting lid is also supplied to prevent

evaporation when system is not being used. Typical etching time is reduced to 4 minutes on loz, copper board!

REDUCES CATNO DESCRIPTION PRICE ETCHING TIME! 12-700 Etch Tank System

1/3" CCD Board Cameras

Available with PINHOLE LENS with AUDIO; STANDARD LENS with AUDIO: and STANDARD LENS with INFRA-RED. These are the world's smallest commercially available CCD board camerasi

1/3° CCD area Sensor

2:1 Interlace

430 Lines 0.03 LUX

45DB

100mA

KHz x 60 HK

EIA=512(H) x 492(V) EIA=9.6UM (H) x 7.5UM (V)

4.3mm stondard, 5mm pinhole

8-12 VDC (9VDC stondord)

1.0 VP-P/750OHM composite signal

World's Smallest B&W Board Cameras **Specifications**

Image Pick-Up Device Picture Elements Pixel Pitch

Scanning System
Scanning Frequency

Resolution Minimum Illumination S/N Ratio Lens Mounting Video Output Power Requirement Power Consumption Operating Temperature -20C -+ 70 C RH 95% Max Storage Temperature -40C -= 85 C RH 95% Max Audio Pick-Up Sensitivity -60 DB (0DB = 1B/UBAR, 1KNZ)

Audio Frequency Range 20 Hz to 20KHz Audio S/N Rotio More than 35DB Audio Output Level **Dimensions**

WDS-2005 WDI-4000 CATNO

WDP-2000

WDP-2000 WDS-2005 WDI-4000

30mm (H) x 30mm (W) 30mm (H) x 30mm (W) 44mm (H) x 30mm (W)

DESCRIPTION 1/3" B&W Pinhole Lens with Audio 1/3" B&W Standard Lens with Audio 1/3° B&W Infra-RED (no audio) WDPH-55BW Plastic Housing Option for B&W Board Cameras (WDP-2000 & WDS-2005 ONLY)

1VP-P/600 OHM

EIA=525 lines, 60 fleid/sec (II) 15.750 WDP-2000

PRICE EACH \$89.00 89.00

\$77.00 77.00 89.00 77.00 13.00 12.00


RECEIVE OUR LATEST 132 PAGE CATALOG!

It's chock full of all types of electronic equipment and supplies. We've got I.C.'s. capacitors, resistors, pots, inductors, test equipment, breadboarding supplies, PC supplies, industrial computers, data acquisition products, personal computers and computer parts, plus much, much more. FAX your name and address or call 800-811-5203, ext. 5, to leave a message on our catalog request line.



WDS-2005

WDI-4000

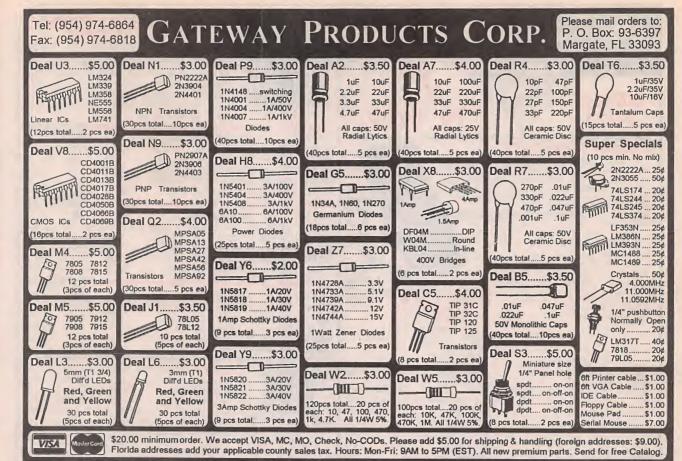

CIRCLE 334 ON FREE INFORMATION CARD



- PRODUCT ENGINEERING

• FIRMWARE DEVELOPMENT

Complete On Site Electrical Engineering Lab

- REVERSE ENGINEERING
- RF CIRCUIT DESIGN & MANUFACTURING

MICRO CONTROLLER & EPROM HARDWARE & SOFTWARE DEVELOPMENT

From Auto-Routing to CNC Routing to Electronic Assemblies. . . Capital Electronics is Your Best Route For Printed Circuit Boards.

DESIGN/LAYOUT

- CAD LAYOUT SERVICES
- COMPATIBLE WITH ALMOST ALL CAD SYSTEMS
- FROM SCHEMATICS OR SAMPLE PCB's
- PHOTOPLOTTING SERVICES
- 28,800 BAUDE MODEM

PRINTED CIRCUIT BOARDS

- SINGLE & DOUBLE SIDED
- MULTI-LAYER & FLEXIBLE PCB's
- From Quick Turn Protoypes TO SCHEDULED PRODUCTION RUNS
- · FINE LINES, SMT
- ELECTRICAL TESTING
- PRECIOUS METAL PLATING

ASSEMBLY SERVICES

- FAST TURN BOARD STUFFING
- WIRE HARNESSES
- WAVE SOLDERING
- Acquisition of Parts
- · FINAL TESTING
- TURNKEY SERVICES
- Custom Enclosures

For Quick & Competitive Pricing or More Information, Please Call Us Today!

303 Sherman Street • Ackley, Iowa 50601

(515) 847-3888

Fax (515) 847-3889 • Modem (515) 847-3890





Internet Access: For Automated Info Response: INFO@capital-elec.com E-Mail: Quote@capital-elec.com

Web Access: http://www.capital-elec.com

G

4 Way Speaker Switch

Control up to 4 pairs of speakers with this compact speaker selector switch. Features circuit protector, heavy duty rocker switches, spring loaded terminals, and silver plated switch connectors. Includes one pair of amplifier inputs. Load to amplifier is minimum 4 ohms (with 8 ohm speakers) or 220 ohms with all speakers switched off.

Net weight: 1 lh. Net weight:



#EN-309-030

\$1500 EACH \$2250 FACH

"The Sound Bridge" FM Stereo Wireless Transmitter

The Sound Bridge is a mini FM wireless transmitter that can be used to broadcast stereo sound from any audio source like portable CD players, TVs, electronic games, CD-ROM, even computer soundcards, to your home stereo receiver! Adjustable from 89 to 95.5 MHz.



Weller"

Weller Professional Irons

Perfect for a variety of electronic soldering work, this top quality iron features a long life, double coated tip and a quick change, plug-In heater element. Lightweight handle includes a comfortable cushloned grip. Net weight: 1/2 lb.

#EN-372-110 (25 Watt) \$30% (1-3) \$28⁵⁰ (4-UP)

Peak Instrument Co.

"The Woofer Tester"

"The Woofer Tester"

Peak Instrument Co. proudly Introduces "The Woofer Tester". Just ask any loudspeaker engineer, and they will tell that the only way to design enclosures of the correct size and tuning is to measure the Thiele-Small parameters for the actual drivers to be used. The reason? Manufacturers published specs can be off by as much as 55%! But until now, measuring the parameters yourself required expensive test equipment and tedious calculations, or super expensive measurement systems (\$1,200 to \$20,000). The Woofer Tester changes all that. Finally, a cost effective, yet extremely accurate way to derive Thiele-Small parameters, in only minutes! The Woofer Tester is a combination hardware and software system that will run on any IBM compatible computer that has EGA or better graphics capability and an RS232 serial port. The Woofer Tester will generate the following parameters. Raw driver data: Fs, Ous, Oes, Ors, Vas, BL, Re, Le, SPL @ 1W/1m, Mmd, Cm, and Rm. Sealed box data: Fsb and system Q. Vented box data: Fsb, ha, alpha, and Q loss. The Woofer Tester system includes hardware, test leads, serial cable, AC wall adaptor, detailed instructions, and software.

EN-390-800

#EN-390-800\$24900 EACH

900 MHz Wireless Speaker System

900 MHz technology sends signal up to 180 ft., through walls, lloors and ceilings.
 Ideal for use as rear surround speakers or for adding wireless sound to every room in the house!
 Full range, bass reflex design with built-in high power, low distortion amplifier.

amplifier. Weather resistant cabinet for

Weather resistant cabinet for outdoor use.

Selectable battery (six C size for each speaker) or AC operation, adaptor included. Built-in recharging circultry for ni-cad batteries. System includes: 900 MHz transmitter, wireless speaker pair, AC adaptors, and all cables necessary to hook up system. Limited availability. ♦ Net weight 9 lbs.

Frequency response: 20-18KHz.

#EN-319-030 \$169⁹⁵ EACH

Home Theatre In-Floor Subwoofer

Home Theatre In-Floor Subwoofer

To fully appreciate the potential of movie soundtracks, a dual voice coil subwoofer is a must! Many film special effects are extremely demanding in the low frequency range and require a subwoofer that can duplicate explosions, earth-quakes, even the footsteps of Tyrannosaurus Rex! This subwoofer fits the bill by featuring a 10° dual voice coil woofer for true stereo operation and high pass filters for your main speakers. The most unique feature of this subwoofer is the fact that it is designed to be mounted in between the floor joists in new and existing home constructions. Simply mount the in-floor sub to the joists and mount a heat register grill above opening in subwoofer front enclosure. The subwoofer is now totally out of view and ready to rumble! Includes detailed installation manual.

Specifications: 10° dual voice coil treated paper cone woofer with poly foam surround & Frequency response: 30-100 Hz & Mominal impedance: 8 ohms per coil & Power handling: 100 watts RMS channel/140 watts max & SPL: 89 dB 1W/1m & Dimensions: 27° D x 14-5/8° W x 9° T & Net weight: 28 lbs.

#EN-300-445

#EN-300-445 \$139⁹⁵





VISA





♦30 day money back guarantee ♦\$20.00 minimum order ♦We accept Mastercard, Visa, Discover, and company C.O.D. orders ♦24 hour shippling ♦Shipping charge = UPS chart rate + \$1.90 (\$5.00 minimum charge) ♦ Hours 8:00 am - 8:00 pm ET, Monday - Friday ♦9:00 am - 5:00 pm Saturday. Mail order customers, please call for shipping estimate on orders ex-ceeding 5 lbs. ♦Foreign destination customers please send \$5.00 U.S. funds for catalog. ♦Quantity pricing available.

340 E. First St., Dayton, OH 45402-1257 Phone: 937-222-0173 ♦ Fax: 937-222-4644 E-Mail: sales@parts-express.com

Network Service Tool Set

Popular installation and service tools for networks, modems and telephones. All hand tools are professional heavy duty type.

Use the compact tester on 10BASE-T (UTP & STP), thin Ethernet (BNC), 8-position Token Ring, AT&T 258A and EIA/TIA 568A/B. Automatically scans cables for continuity. wiring sequence and polarization. Tests STP cable ground. Testing installed cables is easy with Remote Terminator . and gender changers (UTP and BNC). 9V battery included.

- Coax Stripping Tool, RG-58 & RG-59
- BNC Crimping Tool, RG-58 & RG-59
- Modular Cutting/Stripping/Crimping Tool (4, 6 & 8-Position)
- Multi-Network Cable Tester
- AC Receptacle Tester
- Cable Cutter

Order No. 55625 \$197.00



PC Service Tool Set

Contains all tools needed to troubleshoot & service IBM-compatible PCs. Set includes:

- AMI Diagnostic Software
- POST Card
- Logic Probe
- Digital Multi-Meter
- AC Receptacle Tester
- Serial Adapter
- Serial & Parallel Loopback Connectors
- DIP IC Puller
- PLCC IC Puller
- Grounding Wrist Strap
- Key Top Puller

Order No. 55000 \$198.00



CALL TODAY





RELAYS . LIGHTS . MOTORS

TEMPERATURE · PRESSURE · LIGHT LEVELS · HUMIDITY

SWITCH POSITIONS • THERMOSTATS • LIQUID LEVELS





PC Diagnostic Tool Set

- AMI Diagnostic Software
- POST Card

Order No. 55555 \$89.00

Network Installation Tool Set

 Network Tool Set 55625 without the Multi-Network Cable Tester.

Order No. 55600 \$99.00

Call for your FREE Catalog


P.O. Box 2015 Tustin, CA 92781 http://www.labvolt.com

CIRCLE 329 ON FREE INFORMATION CARD

F Data Modules



- TXM-4XX-A... .. \$24.50 TXM-4XX-F..... \$25.80
- •ERP 0.25mW into 50Ω
- •3V(F), 5V(F) or 6-12V(A)
- •418 or 433.9Mhz FM
- ·simply add antenna, data, power
- •Range up to 200m
- · Analog or digital data i/p
- ·SAW controlled stability



SILRX-4XX-A

SILRX-4XX-F.....

- Only 21 x 47 x 5mm •13mA; 130uA on power save (100:1)
 - · Carrier detect o/p
- •418 or 433.9MHz FM Superhet
- ·SAW controlled stability
- · Analog or digital o/p
- Wide supply range 4,5-9V (A/F ver.)
- Fast enable time < 3ms



BIM-4XX-F..... \$87.36

ABACOM

TECHNOLOGIES

- Only 23 x 33 x 11mm
- Up to 40,000bps of balanced code
- •Up to 170m range.
- 5v operation
- •418 or 433MHz FM

•3 wire RS232 interface

- •Direct interface to 5V CMOS logic
- ·Fast 1ms enable from power saving
- R5232 •Up to 38400 bps •418 or 433MHz FM. 7.5-15Vdc
- •TX/RX LED indication CYPHERNET -RS232...... \$139.30

\$39.38

•Up to 150m range

Volume Discounts Free Catalog Available

Tel: 416-242-3120 Fax: 416-242-2697 FaxBack: 416-242-3082 MasterCard / Visa

67 Hamptonbrook Dr • Weston • ON • M9P 1A2 • Canada

MODEL 40 \$99

MODEL 30 \$79

MODEL 100 \$279

· PLUGS INTO PC BUS

· 24 LINES DIGITAL 1/0

. 8 CHANNEL-

S BIT A/D/ IN

- 12 BIT COUNTER

· UP TO 14K SMP/SEC

- 12 BIT 100 KHZ A/D

- 4 ANALOG OUTPUTS

. 3 TIMER COUNTERS

• 24 DIGITAL 1/0

- · RS-232 INTERFACE · 28 LINES DIGITAL I/O
- . 8 ANALOG INPUTS · PWM OUTPUT



MODEL 70 \$239

MODEL 45 \$189

MODEL 150-02 \$179

· RS-232 INTERFACE

. 8 ANALOG INPUTS

· 2 ANALOG OUTPUTS

. 7 COUNTERS. 24 RIY

· RS-232 INTERFACE

· TRMS, 20 AMPS

. OPTO-ISOLATED

· COMPLETE DMM

- 12 BIT A/D

· 8 DIGITAL I/O

- . 18 BIT A/D . S S DIGIT
- · UP TO 60 SMP/SEC

Prairie Digital, Inc.


PHONE 608-643-8599 • FAX 608-643-6754 846 SEVENTEENTH STREET • PRAIRIE DU SAC. WISCONSIN 53578

Electronics Now, May 1998

May 1998, Electronics Now

KENWOOD

...from the company you've been listening to for years...




2-Channel, 20-MHz

CS-4125

Regular \$595

Sale \$389



2-Channel, 40-MHz Oscilloscope

CS-4135

Regular \$855

Sale \$685

Hybrid IC Technology is the Key to the High Quality and High Reliability at Low Cost!

- FIX SYNCHRONIZATION detects the trigger level automatically for the acquisition of stationary waveforms without complicated sync level adjustments.
- VERT MODE TRIGGERING enables the acquisition of stationary waveforms for both CH1 and CH2 even when the input signals to the two channels have different frequencies.
- HIGH WITHSTAND INPUT voltage of 400V (800Vp-p).
- RELAY ATTENUATORS are provided for reliable logic switchover.
- SCALE ILLUMINATION (CS-4135 only)
- DIMENSIONS (WxHxD): 300(343) x 140(150) x 415(430)mm () including protrusion. WEIGHT: approx. 7.2kg (CS-4135) approx. 7kg (CS-4125)









Call for your free 84 page test instrument catalog today!!! 8931 Brookville Road * Silver Spring, Maryland * 20910

* Phone 800-638-2020 * Fax 800-545-0058 * email SMPRODINTL@AOL.com

ELLPHONE MODIF. GUIDE

How cellphones operate and are modified. Vulnerabilities to hack attack and countermeasures. Details on programming NAMs, ESNs, etc (cloning), control data formats, computing encoded MINs, ESNs, SIDHs, operating systems, PROM programming, forcing ACK, test mode and resets, cable diagrams, scanning, tracking, scanner restorations, freq allocations, roaming, Step-by-steps to keypad-reprogram 100+popular cellphones. More! \$49.

How Pagers work, different types and uses, freqs, advantages over and uses with cellphones, and tips and tricks. How Pagers are hacked/countermeasures. And plans for a <u>Personal Pocket Paging Sys-</u> tem (xmitter and receiver). *More!* \$29.

PHREAKING CALLER ID & ANI

How they work and dozens of ways of defeating Caller ID, ANI, *69, *57, Call Blocking, *67 etc. Describes ESS, SS7, CN/A, CAMA, DNR, Diverters, Centrex - more! \$19.

BEYOND VAN ECK PHREAKING

Eavesdropping on TV and computer video signals using an ordinary TV de-scribed in detail. Includes security industry reports. Range up to 1 KM. Plans include both the ours and the original Top Secret Van Eck designs! \$29.

HACKING THE INTERNET

The latest tricks and methods being used on the Net to pirate software (warez) and the newest hacking websites. Up-dated every two months. Includes examples, countermeasures, password and feats, UNIX, Sprintnet, brute force methods, lots of tips, and more! \$25.

COMPUTER PHREAKING

Describes in detail how computers penetrate each other, and how VIRUSES, TROJAN HORSES, WORMS are implemented. Dozania policy and process of the process of ens of computer crime and abuse methods and countermeasures. Includes disk filled with hacker text files and utilities, and the legendary FLUSHOT+ protection system . Internet advice, password defeats, glossary-much more! Manual + PC Disk! \$39.

Hacking Fax Machines - \$29 PBX Hacking - \$19 Voice Mail Hacking - \$29 Beyond Phone Color Boxes - \$29 Hacking Answer. Machines - \$19 The Hacker Files - 139 Internet Cons & Scams - \$19 Internet Tracking & Tracing - \$29 Hacking the Internet - \$25 Cookie Terminator - \$19 Beyond Van Eck Phreaking - \$29 Casino Hacking - \$25 Credit Card Scams - \$29 Cons & Scams - \$29 Polygraph Defeats - \$25 By an Order of the Magnitude - \$49 Ultimate Success Manual - 19 Stealth Technology - \$19 Cryptanalysis Techniques - \$29 Secret & Survival Radio - *19 Secret & Alternate IDs - *15 Rocket's Red Glare - \$29 High Voltage Devices - \$29 Mind Control - \$29 Under Attack! - \$29 Radionics Manual - \$29 Heal Thyself - \$19

SPECIAL PROJECTS

We will design & build just about anything! Ask for our free SP Application Form! Hardware now done as SPECIAL PROJECTS only

THE DIRTY-2 DOZEN! STOPPING
24+ Disks. See CATALOG! METERS

AND IS CHARLE

As reported on "60 MINUTES"!

All-new 6th Edition! Over 45 pages jampacked with how devices can slow down (even stop) watt-hour meters - while loads draw full power! Device plugs into one outlet and normal oads into other outlets. Describes meter creep, overload droop, etc. Plans only! \$29.

THE I.G. MANUAL: External magnetic ways (applied to meter) to slow down and stop power meters while drawing full loads. Plans \$25.

KW-HR METERS: How watt-hour meters work calibration, error modes (many), ANSI Standards, etc. Demand and Polyphase Meters. Experimental results to slow and stop meters by others. \$25.

All 3 (above), Only \$59! (Add \$20 for SPM Video)

MAIL \$3 FOR OUR LATEST CATALOG TO: (\$1 w/order)

P.O. Box 23097 ABQ, NM 87112 10% 01 1

P.O. Box 23097 ABQ, 1976 Orders Over Order Today! 505-237-2073 (9-6, M-F) 2 100!! Fax: 505-292-4078(all hours, orders only) Web Adventure: www.tsc-global.com

Established in 1971. Featured on CBS *60 Minutes,* Forbes, New York Times. Add \$5 total \$/H (US, Canada).

Sold for educational purposes only. Postal M.O. is fastest. VISA, MC OK. COD add \$7.

See Catalog for LIMITED WARRANTY, SPECIAL PROJECTS and all other Policies

POWER-METERS

Now its easier to learn about KW-HR Power Meters than ever before! This educational video shows you how they work and their anatomy. Demonstrates SPMEM device and external magnetic methods used to slow and stop meters! Hosted by a top expert in the field. From the novice to the pro, an excellent source of info on these exciting devices! Great in combo with our SPM related manuals!

Only \$49 for SPM video + SPM manual!!

CIRCLE 226 ON FREE INFORMATION CARD

eeder **Technologies**

Add \$4 Ship/Hand US & Canada

FREE CATALOG! VISA



850-863-5723

PO Box 2426, Ft. Walton Beach, FL 32549 Stackable RS-232 Kits

Digital I/O - 12 I/O pins individually configurable for input or output. DIP switch addressable; stack up to 16 modules on same port for 192 I/O points. Turn on/off relays. Sense switch transistions, button presses, 4x4 matrix decoding using auto-debounce and repeat.

Analog Input - 8 input pins. 12-bit plus sign self-calibrating ADC. Returns results in 1mV steps from 0 to 4095. Software programmable alarm trip-points for each input. DIP switch addressable; stack up to 18 modules on same port for 128 single-ended or 64 differential inputs.

Home Automation (X-10) - Connects between a TW523 and your serial port. Receive and transmit all X-10 commands with your home-brewed programs. Full collision detection and autore-transmission. \$38.50

Caller ID - Decodes the caller ID data and sends it to your serial port in a pre-formatted ascil character string. Example: *12/31 08:45 850-883-5723 Weeder, Terry < CR>*. Keep a log of all incoming calls. Block out unwanted callers to your BBS or other modem applications. *34.50

Touch-Tone Input - Decodes DTMF tones used to dial telephones and sends them to your serial port. Keep a log of all outgoing calls. Use with the Caller ID kit for a complete in/out logging system. Send commands to the Home Automation or Digital I/O kits using a remote telephone. \$33.50

Telephone Call Restrictors

Two modes of operation; either prevent receiving or placing telephone calls (or call prefixes) which have been entered into memory, or prevent those calls (or oprefixes) which have not been entered.

Block out selected outgoing calls. Bypa at any time using your password. \$35.00

Block out selected incoming calls. Calls Identified using Caller ID data. \$48.00

Phone Line Transponder

7 individual output pins are controlled with buttons 1-7 on your touch-tone phone. Automatically answers telephone and waits for commands. Monitor room noises with built in mic. 'Dial-Out' pin instructs unit to pick up phone and dial user entered number(s). Password protected. \$49.00

IR Remote Control Receiver

Learns and records the data patterns Learns and records the data patterns emitted by standard infrared remote controls used by TVs, VCRs, Stereos, etc. Lets you control all your electronic projects with your TV remote. 7 individual output pins can be assigned to any button on your remote, and can be configured for either "toggie" or "momentary" action. \$32.00

DTMF Decoder/Logger

Keep track of all numbers dialed or entered Keep track of all numbers dialed or entered from any phone on your line. Decodes all touch-tones and displays them on a 18 character LCD. Holds the last 240 digits in a non-volatile memory which can be scrolled through. Connect directly to radio receiver's speaker terminals for off-air decoding of repeater codes, or numbers dialed on a radio program. \$54.50

The model 220 is an 80-110 MHz RF amplifier that connects to mono or stereo FM transmitters and produces a powerful 2-15 watt signal which could broadcast up to 5 miles or more! Requires 50-150 mW drive. Step by step plans complete with part source \$14 PLUS \$2 S&H information and antenna designs... ONLY \$14 NO C.O.D.3

Progressive Concepts
BOX 586 STREAMWOOD, IL 60107
VISA
(630)736-9822 FAX:(630)736-0353



EAVESDROPPING is unbelievably widespraed! Electronic Devices with amazing capabilities can be monitoring your telephone and room conversations (RIGHT NOW! Are you sure you're safe? FREE CATALOG tells you feat! Includes Free Bonus details on enteratic opportunities now open in Counter-Surveillance field. Exciting, immensely interesting and EXTREMELY profitable (up to \$250 hr) full/part-time income. Call Now!

CABLE TV CONVERTERS

Equipment & Accessories Wholesalers Welcome

Call C&D ELECTRONICS 1-888-615-5757 M-F 10a-6p

Quality Reconditioned TESTER UNDMENT

Hewlett-Packard 3586B

Selective Level Meter, makes carrier measurements to 32.5 MHz, voice channel measure-ments from 50 Hz to 100 kHz.



\$850.00 Hewlett-Packard 8901B

Modulation Analyzer, frequency range 150 kHz to 1300 MHz, measures RF frequency and RF power, completely automatic, has RF rear panel connectors. Other options available.

\$5,200.00

Hewlett-Packard 8903B

Audio Analyzer, 20 Hz to 100 kHz, combines the functionability of a low-distortion audio source, frequency counter, high performance distortion analyzer, ac/dc voltmeter, and SINAD meter. Options available.

Special \$3,250.00

Hewlett-Packard 8657A Opt 002

Signal Generator, 100 kHz to 1040 MHz, 10 Hz resolution, +13 to - 143.5 dBm into 50Ω . Opt 002, RF connectors on rear panel.

\$4,500.00

Hewlett-Packard 8642A

Synthesized Signal Generator, 100 kHz to 2.115 GHz, <-134 dBc/Hz SSB phase noise at 20 kHz offset, -100 dBc nonharmonic spurious, +20 dBm maximum output level.



\$19,995.00

Hewlett-Packard 3335A

Synthesizer/ Level Generator, 200 Hz to 81 MHz, high spectral purity, precision amplitude control, 1 MHz resolution.

\$6,250.00

Hewlett-Packard 8662A

Signal Generator, 10 kHz to 1280 MHz, output from +13 to -139.9 dBm, offers versatile phase-locked AM/FM using either internal 400 Hz and 1 kHz rates or externally applied modulating signals, either ac/dc coupled.

\$28,700.00

Hewlett-Packard 8684B Opt 003

Signal Generator, 5.4 to 12.5 GHz, 10 MHz resolution with 3.5 digit LED display, +10 dBm to -130 dBm output power, AM, FM, and pulse modulation from internal or external source. Pulse modulation 10 Hz to 1 MHz.

\$2,450.00

Hewlett-Packard 8447E

Amplifier, 100 kHz to 1.3 GHz, high power with +15 dBm output.Gain of 22 dB, ±1.5 dB.

\$725.00

Tektronix 464

100 MHz Storage Oscilloscope, dual trace, 5 mV/div, variable persistence. Includes 2 probes.

\$475.00

Tektronix 465B

100 MHz Oscilloscope, 5mV/div sensitivity, 2 nS sweep rate, delayed sweep, trigger view and beam finder. Includes 2 probes.

\$675.00

Tektronix 466

100 MHz Storage Oscilloscope, dual trace, 5 mV/div, stored writing speed of 3000 div/µs variable persistence. Includes 2 probes.

\$575.00

Tektronix 485

350 MHz Oscilloscope, dual trace, 5 mV/ div sensitivity, 1 ns/ div sweep rate, 3.0 div/ ns writing speed, selectable input impedance. Includes 2 probes.

\$895.00

Tektronix 2336 Oscilloscope

Do to 100 MHz bw, 5 mV/div to 5 V/ div, 5 ns/ div sweep rate, delta time on the flip top cover. Includes 2 probes.

Special \$850.00



Hewlett-Packard 54111D

Digitizing Oscilloscope, 2-gigasamples/ second digitizing rate, 500 MHz bw, 8 kb memory per channel, up to 8 bits of vertical resolution, fully HP-IB programmable.

Special \$3,900.00

Hewlett-Packard 8640B

Signal Generator, 0:5 to 512 MHz, -149 to +19 dBm RF output, phase locking and counter.

Special \$1,250.00

EIP Microwave 545

Frequency Counter, 10 Hz to 18 GHz frequency range, 12 digit LED display, 15 mV sensitivity, 50Ω input.

Special \$995.00

EIP Microwave 545A

Frequency Counter, 10 Hz to 18 GHz frequency range(3 bands), 12 digit LED display, time base: 10 MHz, aging rate <3x10-7/month, 50 Ω input.

Special \$1,295.00

EIP Microwave 548

Microwave Frequency Counter, 10 Hz to 20.0 GHz, 12 digit LED display, source locking.

Special \$2,500.00



WANTED: USED TEST EQUIPMENT

87



NEW: RS-232 programmable 256x128 Graphic Display Module w/software controlled Backlight. Upload up to 128 BMP Image Files, animate at 960 frames/second, 16 level grayscale capability. Supports 32x16 Text overlayed with graphics. Documentation, Windows95 Setup Utility, and QBasic Example

Software included. Counts as 2 Devices on the NCD RS-232 Network. Combine up to 8 LCDAs on a Single Serial Line or mix with our relay drivers and other devices. Model described just \$299. Two other models available for \$199 and \$249.



8/16 Hobby Servo Controller. Futaba-J Compatible, Infrared Receiver Included with SV16 upgrade. Perfect in all animatronic applications.

SV8 Kit \$39 Asm \$54 SV16 Upgd Kit \$19 Asm \$29



8-Relay Driver (Quad Relay Driver Available) includes 8 LED Status Lights. 12V Operation. Infrared Receiver With Omron Mech Relays. R85 (5A) Kit \$89 Asm \$139 R810 (10A) Kit \$109 Asm \$159

Includes Drivers in QBasic. Mac & Amiga Software Also Supported.

National Control Devices Contact Ryan Sheldon Phone: (404) 244-2432 FAX: (417) 646-8302

Include \$5 Shipping. Visa/MC Accepted.

NCD, Box 384, Osceola, MO 64776

tern. .

High-Power Stepper Motor Controller for unipolar motors up to 12 volts 2 amps. Takes a step for every byte received. Control up to 16 steppers from 1 serial port. STP Kit \$24 Asm \$39

Combine 16 Devices



Audio/Video Switcher: 8 Inputs, 2 Outputs, Infrared reo inputs, 2 stereo outputs. Controllable, Routes Any Input to Any Output. 12-18 volt Controlled by infrared or RS-DC operation. For Low-Power 232 w/Windows95 software. (Line-Level) Signal Switching. AVS8 Kit \$89 Asm \$139



Audio Selector with 4 ste-Volume, Trebble, Bass, Fader. Fully NCD Networkable. NCD-ASP8X4 Asm \$79

Infrared Transceiver for Remote RS-232 Communication with 16 IR Controllable Devices. IRTR Kit \$24 Asm \$39 RSB Serial Booster Gives your RS-232 Port the Power It Needs to Drive 16 NCD Devices. RSB Kit \$12 Asm \$24

On-Line Catalog: http://members.aol.com/ncdcat/ E-mail: ncdryan@aol.com/

Show

Step Pat-

CIRCLE 316 ON FREE INFORMATION CARD

PCB Artwork Made Easy!

PRINTED CIRCUIT DESIGN SOFTWARE

For Windows and DOS

Layout - Autorouting - Schematic - Circuit Simulation

- * NEW 32 bit version available
- * Ripup and Retry Router in Advanced Pkg.
- * Copper Flooding for Building Ground Areas
- * Gerber and Excellon Output
- * Create Negative & Positive Printouts
- Create Single or Multi Layer Boards
- Create artwork from the Schematic
- Analog and Digital Simulation available
- Make boards up to 32" x 32"
- Parts Libraries Silk Layers Solder Mask
- Great for All Circuit Design Projects!
- For the Professional and Hobbyist!

Download Demos from BBS (205)933-2954

WindowstmVersion starts at \$149



PCBoards Layout for DOS

Call or Write for Full Product Line, Prices & Free Demo

PCBoards

2110 14th Ave. South Birmingham, AL 35205 (800)473-7227

Fax (205)933-2954 Phone (205)933-1122

WHITE-STAR ELECTRONICS

TEL: 405-631-5153 FAX: 405-631-4788

CONVERTERS: 20	50	100+
Regal CR-8345	39	35
Panasonic TZPC 17575	69	65
Centurion CF 300065	59	55
Regal CR-83 Volumm69	65	59

Call for FREE catalog. 405-631-5153



100000			
REMOTE CONTROL			
HAND UNITS:20	50	100+	
Jerrold Replaces: 400/450/5504.95	4.50	4.25	
Scientific Atlanta: 075/175/4754.95		4.25	
8600: On screen display7.50	7.00	6.50	
Pioneer: BR 81, 824.95	4.50	4.25	
Panasonic: Call for model #7.50	7.00	6.50	
Zenith: All4.95		4.25	
Tocom: 5503-VIP, 5503-A7.00	6.50	6.25	
Universal: 4 in 1 R/M7.50	7.00	6.50	

Call for Oak, Hamlin, Regal-83, Regency, Texscan, and all others.

Tamper-Bit tools: (10-lot) Jerrold compatible bits: 1/4" Stacom Bit ... Oval Round D..... Torx Bit: Tocom T-8 Zenith T-10,T-15 .\$8.00 \$20.00 Bit Driver Handle





We carry most remote hand units. If you don't find the one you're looking for, we can locate for you.

Specializing in large quantities.
HOURS: Monday thru Friday 9 am to 5 pm Central Time.

Call for FREE catalog. Email: wse405@aol.com

Electronics Now, May 1998

Earn up to \$45 an hour or more as a skilled Computer Programmer.

Cash in on the explosion of opportunities. Start your new career or even open a business of your own as a highly-paid computer programmer.

omputer programmers today can almost write their own ticket to financial well-being and job satisfaction. Only Foley-Belsaw's unique in-home training programs can give you the skills you need at a price you can afford.

You'll learn the three hot computer languages — QBasic, C and Visual Basic. You'll even work with the hot new C++. With this easy-to-learn knowledge, you'll write your first QBasic program by the end of the first SkillPak of lessons. Soon you'll be programming sound and graphics, and even learning how to program for the Windows environment the most popular application program today.

It's easy to cash in!


Look at some of the things professional computer programmers do. "Wrote a C program to clean up a WordPerfect file; edited the resulting file as data errors were found." This work would take a trained programmer less than five hours to complete, and they could make over \$200 for the work. That's money you could be making — and soon — with training from the Foley-Belsaw Institute of Computer Programming.

Everything is included!

We provide you with all the materials you'll need to become a professional computer programmer. You'll receive 37 lessons, designed for you by the Foley-Belsaw Professional Programmer Staff. Other valuable materials include a Programmer's Handbook, Programmer's Examples on two 3.5 inch disks, Programmer's Flowchart Template, and a booklet, Selecting the Right Computer.

Other schools force you to buy a complete computer package as part of their training program. At Foley-Belsaw we understand that your needs as a programmer may not fit into a "one size fits all" approach. Why should you pay hundreds of dollars for a computer system that you may not need?

We'll tell you what you need to know so that when you're ready to buy your own computer, you can get the machine that fits your needs at the lowest possible price. That's the Foley-Belsaw way.

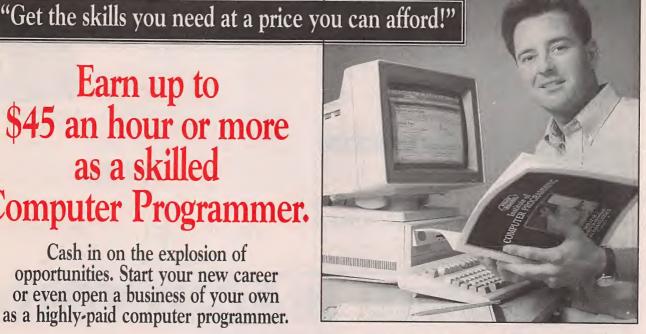

Get the free facts today.

Whether you want to change careers, have a profitable part-time job or start your own business, Foley-Belsaw Institute's new computer programming course is the first step. A profitable future in computer programming can be yours. Call or write today for a fact-filled information kit including a free copy of Computer Programming — A Profitable Career In Your Spare Time. See how easy it is to begin a money-making career as a sought-after computer programmer. Our free fullcolor information kit outlines the steps of the computer programming course and shows you everything you will receive as part of your training.

> Mail this coupon or call today Toll Free 1-800-487-2100!

Your free opportunity kit will be rushed to you!

If coupon is missing, write to: Foley-Belsaw Company, 6301 Equitable Road, Kansas City, MO 64120

Call or complete & return this coupon to: Foley-Belsaw Institute,6301 Equitable Road, Kansas City, MO 64120

YES! Rush me a free information kit on Computer Programming right away. Dept. 35509

- ☐ Locksmithing, Dept. 13095
- ☐ Small Engine Repair, Dept. 52967
- ☐ Saw & Tool Sharpening, Dept. 21902
- ☐ VCR Repair, Dept. 62791
- ☐ Computer Repair, Dept. 64693
- ☐ TV/Satellite Dish Repair, Dept. 31562
- ☐ Gunsmithing, Dept. 92598
- ☐ Woodworking, Dept. 43834
- ☐ Upholstery, Dept. 81504
- ☐ Vinyl Repair, Dept. 71438
- ☐ Electrician, 95371
- ☐ Computer Specialist, Dept. 38337

☐ Networking Specialist, Dept. 39324

Lindwestand that there is ABSOLUTELY NO OBLIGATION and NO SALESMAN WILL CALL Name Address State









Use Your PC to Monitor and Control Your Environment

PC Host Adapter



RS232 to 1-Wire™ protocol host adapter interface. Converts standard PC serial port to a 1-Wire™ network. All interface components are contained inside the DB9 shroud. The HA3

supports all Point Six Products.

No external power required.
Includes OneSix ™ DDE Server Software.

Connects to 9 pin RS232 port on the PC.

2000 `Network and 200 1-Wire™ devices.

Weight 0.5 lb.

supports all Point Six Products.

OneSixTM DDE Serve



A software server driver for Windows® 95, 3.1 and 3.11 that allows easy interface of 1-Wire™ devices and Point Six products to applications via DDE links. This eliminates the need for low level device comprising the products and applications. device communication programming.

device communication programming.

- Searches network, adds and auto configures all new devices found.

- Copy and paste links to Office® products like Excel®, Word® and many other ODE capable applications.

- Works with HMI interface software such as Wonderware®, LabView®, and TestPoint®.

- Includes complete help. - Includes an HA3 Host Adapter.

- Weight 0.5 lb. • One-year warranty.

1-Wire™ Probes



STP010

Our probe designs are based on 1-Wire™ protocol devices. All probes are multi-dropable and supported by OneSix™ DDE Server Software. Digital Data Output.

Built-in multi-drop controllers. • All Data is CRC16 error checked.
• Unique device addressing.
• Calibration data stored in internal ROM memory.

No external power required.
Standard Temperature Range -30 to +182°F.
Requires Host Adapter or existing network.

· Weight 1.0 lb. · One-year warranty.

Very Low Cost Per **Point Temperature** Monitoring

Description
Hotal Adaptor
Hota STP010

Two wire multi-drop network based on Dallas Semiconductor 1-Wire™ Protocol



http://www.pointsix.com

Example: 25 Digital Thermometer Chips, 1000ft Cat-5 Cable, HA3 Host Adapter, OneSix DE Server Software Driver, and Windows® Monitoring Application all for less than \$10 per point.

Electronic CAD for Windows

Professional Windows EDA tools at an affordable price with powerful features to make designing faster. WinBoard PCB layout delivers sophisticated interactive routing for complex designs, plus it has the tools needed for high-speed circuits, analog, RF and SMT designs.

WinDraft[®] Schematics


- Use True-Type fonts. Quickly copy and paste into other applications.
- Supports hierarchical designs, electrical rules checking, Annotation & Bill of Materials.
- Thousands of library parts and symbol editor included.

WinBoard[™] PCB layout

- Supports 16 layers, multiple copper pours, and advanced features for RF designs.
- SMD & through hole library with on-line graphical editor.
- CAM outputs include BOM, in-circuit test, NC Drill, Gerber, Pick & Place, & Advanced Design Rule Checking (DRC).

With our unique *pin capacity* versions you only pay for what you need. You choose the base configuration to suit your needs today, and expand that configuration to handle increased pin capacity as your design requirements change.

WinDraft 2.0 Available Now



\$ 250 WinDraft or WinBoard - P650 \$ 495 WinDraft or WinBoard - unlimited

\$ 895 WinBoard P650 with CCT Specctra® autorouter.

Thousands of satisfied customers are using this new generation of powerful and affordable Windows EDA tools from Ivex. Your satisfaction is guaranteed!

World Wide Web: http://www.ivex.com

Information and free evaluation version is available on the Ivex WW Web, FTP and BBS.

Tel: (503) 531-3555 Fax: (503) 629-4907 BBS: (503) 645-0576



Ivex Design International. 15232 NW Greenbrier Parkway. Beaverton, Oregon 97006. USA.

CIRCLE 319 ON FREE INFORMATION CARD

ADV2_1



meredith—* INSTRUMENTS

5420 W. Camelback Rd #4 Glendale, AZ 85301 (602) 934-9387



New Visible Laser Diodes \$10.00

New He-Ne tubes from \$10.00


Check out our complete line in our Free catalog on Lasers and Optics

http://www.mi-lasers.com



You could pay up to ten times more for many of the same features that you get with these innovative design tools.

\$29.95



Over 25,000 people use WinDraft Schematics and WinBoard PCB layout tools for Windows. Now, you can buy a special 200 pin version of these best selling Windows based tools for only \$29.95 each.

You get everything you need to complete your circuit designs at an affordable price and it's easy to expand as your designs grow.

For the name of your local NTE distributor, Call 1-800-683-6837, or browse the internet www.ivex.com/nte.html

DESIGN INTERNATIONAL

RPRO

A DEVICE PROGRAMMER FOR BENCH AND FIELD



FIRST GENERATION EPROMS (24 PIN) 2708, TMS2716*, 1702*, 25XX SECOND GENERATION EPROMS (24, 28, 32 PIN) 2716 - 27C080 (8 MEG) 16 BIT EPROMS* (40, 42 PIN) 27C1024 - 27C160 (16 MEG)

FLASH EPROMS (32 PIN) 28F, 29C, 29EE, 29F FAMILIES PLUS BOOT BLOCK EEPROMS/NVRAMS (24-32 PIN) 28C04 - 28C010, X2210/12, ER5901, 12XX SERIAL EEPROMS* (ALL 8 PIN PARTS) 17, 24, 25, 35, 59, 80011, 85, 93, ER1400 BIPOLAR PROMS* (16-24 PIN) 74SXXX AND 82SXXX FAMILIES

MICROCONTROLLERS* (ALL FAMILIES) 874X, 875X, 87C5XX, 87C75X, 89C5X 89CX051 68HC705, 68HC711, P1C12XXX - 16XXX, 17C4X PLUS FLASH AND 14000

- ◆ READ, PROGRAM, COPY COMPARE, FILE LOAD/SAVE (PLUS MORE!)
- ♦ FULL SCREEN EDITOR W/25 COMMANDS + BYTE & WORD MODES
- ◆ SOFTWARE RUNS UNDER DOS, WIN3.1/95 ON ANY SPEED MACHINE
- ♦ MADE IN THE USA 30 DAY MONEY BACK GUARANTEE **ADAPTER RECOURSED DIAGRAMS INCLUDED

SYSTEM INCLUDES: PROGRAMMING UNIT, SOFTWARE, PRINTER PORT CABLE, PRINTED MANUAL AND POWER PACK

ANDROMEDA RESEARCH P.O. BOX 222

MILFORD, OHIO 45150 (513) 831-9708 FAX (513) 831-7562

\$5.00 SHIPPING • \$5.00 C.O.D. VISA • MASTERCARD • AMEX

386 MINI-PC \$83

EVAL \$295



-5 Serial,3 Parallel (32bit max) -Up to 8 meg ROM (27C080) -32k RAM exp. to 64Mbyte -Battery backed RT Clock

-LCD and Keyboard ports -IRO x15, DMA x2, TIMER x4 -On-board LED display -Industry Standard PC Bus

Perfect when a full-size PC is too large, expensive, or power hungry. A fully functional single board computer, needs only program and power source. Runs DOS / WINDOWS. Use Turbo C, BASIC, MASM. All utilities to do this included.

A to D D to A

For PC or SBC 8,12,16 bit resolution up to 24 channels starting at \$21 OEM (1k) eval kit \$75

up to 8 meg (27C64-080). Adapters for micros, PLCC, etc. Parallel port version for notebook. FAST AND EASY TO USE.



LOW COST ... LOW POWER ...

LOWER COST, FASTER, EAS	IER TO PE		NGLE CE	IIP (UM	PUIEK
COMPARE:	16C54	MV1200	PIN	OUT:		
OEM (1K) PRICE	\$2.57	\$1.99				
RS232 PROGRAM DOWNLOA		YES	RESET	1	20	VCC
SINGLE CHIP OPERATION	NO	YES	PD0	2	19	PB7
BUILT-IN BASIC	NO	YES	PD1	3	18	PB6
EEPROM DATA MEMORY	NONE	64	XOUT	4	17	PB5
PROGRAM MEMORY	768 OTP	1K FLASH	XIN	5	16	P84
MATH REGISTERS	1	32	PD2/INT	6	15	PB3
MAX INSTRUCTIONS / SEC	5M	20M	PD3	7	14	PB2
MAX COUNTER BITS	16	18	PD4/TMR	8	13	PB1/AD1
INPUT / OUTPUT BITS	12	15	PD5	9	12	PB0/AD0
A TO D COMPARATOR	NO	YES	GND	10	-11	PD6
HARDWARE INTERRUPTS	NONE	3				
- LONG WORD INSTRUCTIO	N - FRIEN	DLY SYMM	ETRIC A	RCH	11112	CTURE -



PC SOLID

FLASH / RAM / EPROM 256K-16M PCMCIA/DIPS

No More Hangups... PC WATCHDOG!

Reboots PC OEM \$21 EVAL \$75



GA 640x480 controller for PC or SBC \$27 oem \$95 eval combo LCD/CRT version available



visit our web site: www.star.net/people/~mvs

MVS BOX 850 MERRIMACK,NH 03054 (508) 792-9507



5yr Limited Warranty Free Shipping Hrs: Mon-Fri 10-6 EST

CIRCLE 323 ON FREE INFORMATION CARD





The finished kit is a sturdy general purpose Geiger counter capable of detecting alpha, beta, gamma, and x-rays. Kit price \$160.00



S.E. International, Inc. P.O. Box 39

Summertown, TN 38483-0039

Tel: 800-293-5759 Fax:931-964-3564 E-mail: seiinc@usit.net Website: seintl.com

Learn MICROCONTROLLERS EMBEDDED SYSTEMS and PROGRAMMING.

...with the AES learning system/ embedded control system. Extensive manuals guide you through your development project. All programming and hardware details explained. Complete schematics. Learn to program the LCD, keypad digital, analog, and serial I/O. for your applications.

THREE MODELS AVAILABLE. Choose from an Intel 8051, Intel 8088, or Motorola 68HC11 based system. All models come with:

• 32K Byte ROM, 32K Byte RAM • 2 by 16 Liquid Crystal Display • 4 by 5 Keypad • Digital, Analog, and Serial I/O • Interrupts, timers, chipselects • 26 pin expansion connector • Built-in Logic Probe • Power Supply (can also be battery operated) • Powerful ROM MONITOR to help you program • Connects to your PC for programming or data logging (cable included) • Assembly, BASIC, and C programming (varies with model) • Program disks with Cross Assembler and many, well documented, program examples • User's Manuals: cover all details (over 500 pages) • Completely assembled and ready to use • Source code for all drivers and MONITOR • Optional Text Book

Everything you need. From \$279. Money Back Guarantee

Call for Free Info Pack, or see WEB at http://www.aesmicro.com 714-550-8094, FAX 714-550-9941




Call 1-800 -730-3232

AES 575 ANTON BLVD., SUITE 300, COSTA MESA, CA 92626, USA

Digital Oscilloscopes


100 MSa/s Parallel Port Based DSO



- · 2 Ch. Digital Oscilloscope
- 100 MSa/s Max Single-Shot Rate on Both Channels
- · 60MHz Input Bandwidth
- · 32K Samples Per Channel
- Optional FFT Spectrum Analyzer*, Advanced Math* and TV Line Trigger**
- IEEE Pulse Parameter Measurements

- One touch Auto-Setup
- Advanced Pulse Triggering*
- · Hands-Free Voice Control
- · Easy to use Windows and DOS Software Included
- · Parallel Port Interface to Laptop or Desktop PC
- · Small and Lightweight (9 oz and 6.3" x 3.75" x 1.25")
- · Free Demo Software on Web

For \$499 you get the model DSO-2102S Oscilloscope, Probes, Interface Cable, Power Adapter, and Windows and DOS Software. *DSO-2102M \$599 **TV-Line Module \$149



DSO w/Logic Analyzer (ISA based)



- 200 MSa/s Max Single-Shot
 10 Channels Simultaneously Sample Rate
- 2 Oscilloscope Channels

- · 125 MHz Single Shot Bandwidth
- Up to 128K Samples/Channel
- · 8 Logic Analyzer Channels · FFT Spectrum Analyzer included

DSO-28264 (10Ch, 200MSa/s, 64k) \$1999 DSO-28464 (20Ch, 200MSa/s, 64k) \$3799 All prices include Probes and Software



Link Instruments (973) 808-8990

369 Passaic Ave (Suite 100 (Fairfield, NJ 07004 www.LinkInstruments.com/en5 (Email: Sales@LinkInstruments.com CIRCLE 330 ON FREE INFORMATION CARD

Features


- · 20 kHz real-time bandwith
- Fast 32 bit executable
- Dual channel analysis
- High Resolution FFT
- Octave Analysis
- THD, THD+N, SNR measurements
- Signal Generation
- · Digital Filtering
- Triggering, Decimation
- Transfer Functions, Coherence
- Dynamic Data Exchange (DDE)
- · Time Series, Spectrum Phase, Spectrogram and 3-D Surface plots
- · Real-Time Recording and Post-Processing modes

Applications

- Distortion Analysis
- Frequency Response Testing
- Vibration Measurements
- Acoustic Research

System Requirements

- 486 CPU or greater
- 8 MB RAM minimum
- Win. 95, NT, or Win. 3.1 + Win.32s
- · Mouse and Math coprocessor
- · 16 bit sound card



Priced from \$299

(U.S. sales only - not for export/resale)

Professional Quality Sound Cards Available...Call

DOWNLOAD FREE 30 DAY TRIAL!

www.telebyte.com/pioneer

Spectra Plus 4.0

Affordable Signal Processing Software


Sales: (360) 697-3472

Pioneer Hill Software 24460 Mason Rd. N.W. Poulsbo, WA 98370

Fax: (360) 697-7717

e-mail: pioneer@telebyte.com

The Pocket Programmer Only \$129.95



The portable programmer that uses the printer port of your PC instead of a internal card. Easy to use software that programs Eprom, EEprom, Flash & Dallas Ram. 27(C) / 28(C) / 28F / 29F / 29C & 25XX series from 16K to 8 Megabit with a 32 pin socket. Adapters available for Pic, PLCC, 5-Gang, 874X, 875X MCU's, 40-Pin X 16 & Serial Eprom's, and Eprom Emulator to 32K X 8.

Same Name, Address & Phone # for 13 Years... Isn't it Amazing?

Intronics, Inc.

Box 13723 / 612 Newton St. Edwardsville, KS 66113 Add \$4.75 COD Tel. (913) 422-2094 Add \$4.00 Shipping

Fax (913) 441-1623 Visa / Master Charge

Filter Wiz v2.0

ACTIVE FILTER design software

for Windows. Provides mastery of lowpass, highpass, bandpass and bandstop filters. Enhance critical signal components while controlling noise and other interference.

Meets the needs of both novice and professional designer. Standard (LE) version \$89, PRO version \$199.

Download: http://www.schematica.com gales@schematica.com FAX:250-642-2644

POPTRONIX°

Edition

We're on the web FREE

http://www.poptronix.com

WE'RE WITH YOU EVERY DAY 24 HOURS A DAY! DROP IN! WE'D LOVE TO HAVE YOU VISIT!

FULL SPEED AHEAD.

1-800-USA-NAVY

ADVANTECH EETOOLS NEEDHAMS DATA VO ICE TECHNOLOGY HILO SYSTEM GENERAL CHROMA MODULAR CIRCUIT TECHNOLOGY XELTEK



CALL ADVANTECH LABTOOL 599 EETOOLS SIMMAX 629 ICE TECH MICROLV 795 CHROMA SIMM/SIP

650 EETOOLS ALLMAX + 409 EETOOLS MEGAMAX

509 EETOOLS MEGAMAX4 3AQ YELTEK SUPERPRO II 409 XELTEK SUPERPRO II P

249 XELTEX SUPERPRO L 165 XELTEK ROMMASTER II

479 MOD-MCT-EMUPA 739 STAG ORBIT-32

359 MOD-MCT-EMUPA/R 279 MOD-MCT-EMUP/R 49 EPROM 1G TO 512K 69 EPROM 1G TO 1MEG 99 EPROM 4G TO 1MEG 199 EPROM 16G TO 1 MEG

89 EPROM 1G TO 8MEG 129 EPROM 4G TO 8MEG 250 EPROM 8G TO 8MEG

LABTOOL48 MICROMASTER SUPERPRO ALLMAX PLUS ROMMASTERS

General Device Instruments Sales 916-393-1655 Fax 916-393-4949 BBS 983-1234

Web www.generaldevice.com E-Mail icdevice@best.com

FerretTronics at www.FerretTronics.com

FerretTronics 3801 N. Jupiter Rd, Suite 8B Richardson, TX. 75082

FT639 Servo Controller Chip

Designed for RC servos found at most hobby stores. Only an 8 pin count.

FT639 Independently control 5 servos. Controlled via a 2400 serial line

Two modes - 256 positions in approximately 90 or 180 degrees

FT629 Switch Feedback Chip

0 0 0 0 FT629

Receive feedback from 5 switches Feedback via 2400 baud line.

Build your own Robotic, animatronics, or research project. Controlled by a PC, Mac, HP48, or any device with serial port. Free software and Java Programing Kit available for download from website ONLY 19.95 For Both Chips.

Call 1-800-228-3404 for orders only

PLAYERS, ETC. TM-354..... \$8.00 EA

IEEE-1284 ELECTRONIC SWITCH

2-COMPUTERS TO

1- PARALLEL PRINTER -NO POWER REQUIRED--SIMPLE PUSH-BUTTON OPERATION-

-ALL PORTS DB-25 FEMALES-

THIS BOX FEATURES FILE TRANSFER CAPABILITY. SIMPLY PUSH A BUTTON AND LINK THE TWO COMPUTERS TO TRANSFER DATA!

DS-252-1284..... \$24.99 FA

COMPUTER POWER SUPPLIES

230 WATT MINI SIZE-UL/CSA PS-245...... \$20.50 FA

250 WATT MINI SIZE -UL/CSA PS-247 \$27.35 EA

CANNED AIR

12oz, CAN COMPRESSED AIR GREAT FOR CLEANING ELECTRONIC EQUIPMENTI TM-AIR..... \$6.50 EA

AUDIO ADAPTERS

S-VIDEO/ADB COUPLER F/F



AD-506...... \$3.95 EA 3.5MM COUPLER F/F-STEREO

AD-503..... \$1.50 FA 3.5MM JACK TO 2.5MM PLUG -STEREO

AD-507..... \$2.70 FA DUAL RCA F/F COUPLER- GOLD

AD-555..... \$3.95 FA

Roger's Systems Specialist

Specials! Microphone

Stick-on monitor or clip on or stick onshirt 6 ft. cord; condenser mic.



#TM-MIC-2 \$200 each

CD Jewel Case Replacement for original



#TM-CD1 \$.40 each

Parallel Port

DB25 Female to 26 pin socket



#CN-702 \$.50 each 100/\$.40

COLORFUL **MOUSE PADS**

MANY COLORS AND PATTERNS- HEAVY DUTY! #TM-PAD \$100 each

Special I-EEE 1284 **Printer Cable**

10' Bi-Directional DB25 Male to Mini Centronic 36 A.K.A. type "A" - "C" #CC-PR6-BIMIN \$.89 each



800-366-0579

"We Have Great Connections"

Computer - Communications Network - Audio - Video

www.rogerssystems.com

Order On-Line!

Call for a FREE catalog!

SCSI

SCSI 1 TO SCSI 1 CABLE 50 pin Centronics male to male 6 ft.

#CC-676 \$700 each

SCSI 2 TO SCSI 1 CABLE HD50 to Centronics 50 male to male

6 ft. #CC-686 \$1900 each

SCSI 3 TO SCSI 1 CABLE HD68 to 50 pin centronics male to male 6 ft. w/ thumbscrews

#CC-687-6TS \$3700 each

SCSI 3 TO SCSI 3 CABLE HD68 to HD68 male to male 6 ft. w/thumbscrews

#CC-693-6TS \$3900 each

SCSI 2 TO SCSI 2 CABLE HD50 to HD50 male to male 6 ft.

> #CC-678-6 \$3600 each

SCSI 2 TO SCSI 3 CABLE HD50 to HD68 male to male 6 ft. w/ thumb screws

> #CC-692-6TS \$3600 each

CABLES

DB25 TO SCSI 1 CABLE DB25 to 50 Centronics male to male 6 ft.

> #CC-670 \$400 each

DB25 TO SCSI 2 CABLE DB25 to HD50 male to male 6 ft.

> #CC-671-6 \$2000 each

DB25 TO SCSI 3 CABLE DB25 to HD68 male to male 6 ft.

#CC-697-6TS \$3900 each



TM-FAN-PENT2

FANS

FOR COOLING PENTIUM II **PROCESSORS** -BALL BEARING--PLUGS ONTO MOTHERBOARD-TM-FAN-PENT2

\$16.00 EA

HARD DISK DRIVE COOLER

-FITS IN FRONT OF HARDDRIVE, FITS IN 5 1/4" BAY-

TM-FAN-HDD

\$14.00 FA

MONITOR CABLES 6' HD15 TO DB13W3 MALE TO MALE

FOR SUN MONITORS

CC-VGA-DB13W3

\$39.00 EA 6' HD15 TO 5 BNC MALE TO MALE CC-VGA-5BNC

\$12.00 EA

All cables available in 3 ft. lengths!

Local 805-295-5577 Remember, We Have Great Connections...For You! FAX 805-295-8777



\$10.00 minimum order required • Add \$4.50 shipping for pre-paid orders California residents add 8.25% tax • eMail Sales@RogersSystems.com

Call for quantity discounts . No out of state checks accepted . Most orders shipped same day













24895 Avenue Rockefeller, Valencia, CA 91355

AISH OS ON THE MER Y	IWW	W.ABCIESI.COM	
TEK 7B15 1 GHZ DELAYING TIME BASE	\$250.00	TEK 2245 100 MHZ 4 CHANNEL O-SCOPE	\$800.00
TEK 1470 NTSC GENERATOR	\$500.00	TEK 7A19 600 MHZ SINGLE TRACE AMPLIFIER	\$150.00
TEK 7A26 200 MHZ DUAL TRACE AMPLIFIER	\$75.00	TEK 7B85 400 MHZ DELAYING TIME BASE	\$125.00
TEK 7904 500 MHZ MAIN FRAME	\$250.00	TEK 7S11 SAMPLING PLUG IN	\$200.00
TEK 7S12 GENERAL PURPOSE SAMPLER	\$350.00	FLUKE 95 SCOPE METER NO PROBES	\$600.00
TEK 453 50MHZ OSCILLOSCOPE	\$200.00	TEK 146 NTSC GENERATOR	\$500.00
DRANETZ 626 DISTURBANCE ANALYZER	\$1500.00	HP 8182A 50 MHZ PATTERN GENERATOR	00.008
GENRAD 1657 RLC BRIDGE	\$750.00	PHILLIPS PM3296 400 MHZ OSCILLOSCOPE	\$1000.00
TEK 7D20 PROGRAMMABLE DIGITIZER	\$500.00	EMI SCR 7.5-300 7.5V 300A POWER SUPPLY	\$500.00
TEK 465 100 MHZ OSCILLOSCOPE	\$400.00		\$1500.00
TEK 465B 100 MHZ OSCILLOSCOPE	\$450.00	WAVETEK 175 WAVE FORM GENERATOR	\$500.00
TEK 2335 100 MHZ OSCILLOSCOPE	\$800.00	WAVETEK 157 PROG. WAVE FORM SYNTH.	\$250.00
TEK 2215 60 MHZ OSCILLOSCOPE	\$350.00	RACAL DANA 1901 100 MHZ COUNTER	\$200.00
TEK 496P 1KHZ-1.8GHZ SPECTRUM ANALYZER	\$5000.00	VALHALLA 2790B SYSTEM INTERFACE	\$150.00
BRADLEY 132 SCOPE CALIBRATOR	\$700.00	GENRAD 1683 RLC BRIDGE	\$300.00
PHILLIPS PM3350A 60 MHZ DIG.STORAGE SCOPE	\$1000.00	HP 3455A MULTIMETER	\$300.00
HP 8601A 110 MHZ SWEEP/SIGNAL GENERATOR	\$400.00	HP 3456A MULTIMETER	\$450.00
FLUKE 5200A AC CALIBRATOR	\$1500.00	FLUKE 77 DMM "NEW"	\$120.00
HP 54100A 1GHZ DIGITIZING OSCILLOSCOPE	\$3000.00	TEK TM504 4 SLOT POWER FRAME	\$125.00
HP 8170A LOGIC PATTERN GENERATOR	\$150.00	HP 4955A PROTOCOL ANALYZER	\$500.00
SYSTRON DONNER DPSD 50	\$500.00	MAGTROL 4614 POLYPHASE POWER ANLZR.	
LEADER LSG215A 125 MHZ SIGNAL GENERATOR	\$700.00	TEK CT-5 HIGH CURRENT TRANSFORMER	\$500.00
TEK TM506 POWER MODULE	\$150.00	FLUKE 8502A 6.5 DIGIT DMM TRUE RMS	\$350.00
PHILLIP PM5785 PULSE GENERATOR	\$750.00	FLUKE 1952 80 MHZ COUNTER	\$200.00
WAVETEK CT235 AC/DC CURRENT PROBE	\$120.00	TEK 475 200MHZ SCOPE	\$500.00

No Calories. No Fat. No Cholesterol.

...NO KIDDING. Our free Consumer Information Catalog serves up over 200 free and low-cost government booklets you can really sink your teeth into. Perk up your appetite with subjects like saving money, buying a house, educating your children, getting federal benefits, eating right, staying healthy, and many more.

So come 'n get it! Whatever your taste, you can feast on the free Catalog. It's filled with plenty of satisfying booklets. Just call tollfree 1-888-8 PUEBLO.

Or get a bite on the Consumer Information Center website: www.pueblo.gsa.gov

U.S. General Services Administration



Do You Repair Electronics?

Repair Databases for TV, VCR, Monitor, UL Audio, FCC, and more,

- Over 76,000 records - Private user forums
- Live on-line chat rooms

CABLE TV CONVERTERS

Equipment & Accessories Wholesalers Welcome

Call C&D ELECTRONICS 1-888-615-5757 M-F 10a-6p



FREE > Product Catalog FR官員 ➤ 1 Year Warranty

100% MONEY BACK GUARANTEE





If you are not getting this catalog you are missing out on some of the best deals in

electronics today! We have thousands of items ranging from unique, hard-to-find parts to standard production components. Call, write, or fax today to start your free subscription to the most unique catalog in the industry, filled with super values on surplus electronic and hobbyist type items. If you have a friend who would like to receive our catalog, send us their name and address and we will gladly forward them a complementary 100 page catalog.

Why pay more? Call today.



340 East First Street Fax Order Line Dayton, Ohio 45402 1-800-344-6324

Order Toll-Free 1-800-344-4465

CIRCLE 251 ON FREE INFORMATION CARD

3 Axis Motion Control System Complete, ready to run \$ 255.50 + 12.00 S/H

Build or adapt CNC mills, CNC routers, Robots, Etc. Includes: 3 Stepping motors (70 oz/in 200 steps/rev). External board (connects to parallel port of a PC). Power supply. Cables, Manual and the MAXNC drive software, with linear, circular and helical interpolation, acceleration deceleration, full contouring, 'G' code programming, screen plot, code generation from CAD (CAM), and more.

For more information, phone or write to:

MAXNC 6730 West Chicago

Suites 2 & 3 Chandler, AZ 85226 Ph (602) 940-9414 Fax (602) 940-2384



COMPILER

\$49.00

for PIC microcontrollers

Supports PIC16C55x, 16C6x, 16C62x, 16C8x, 16C92x microcontroller families. Based on ANSI C standard. Supports arrays, unions, structures, pointers, strings, function calls, if, for, switch, while, interrupt vectors, in-line assembler code, 8 & 16 bit variables, etc. Outputs Intel Hex format and assembly code. Code optimizer included. Excellent development tool!

732-873-1519 fo: 732-873-1582 e: grichrc@aol.com Grich RC Inc. 120 Cedar Grove Ln, Ste 340, Somerset NJ 08873

Any waveform you want!



Telulex Inc. model SG-100

Starting at

Quantity 1

Money back quarantee


 Synthesized Signal Generator Clean sinewayes DC-20 MHz with .001% accuracy! .1 Hz steps. DC Offset. RS232 remote control.

 Arbitrary Waveform Generator 40 Megasamples/Second. 32,768 points. 12 bit DAC

 Function Generator Ramps, Triangles, Exponentials & more to 2 MHz!

 Pulse Generator Digital waveforms with adjustable duty cycle

DC to 20 MHz linear and log sweeps




Pulse Generator




Int/Ext AM, SSB, Dualtone Gen.




Noise




Int/Ext FM, PM, BPSK. Burst



Arbitrary Waveforms



Ramps, Triangles, Exponentials



Unlimited Possibilities!

Telulex Inc.

2455 Old Middlefield Way S Tel (650) 938-0240 http://www.Telulex.com

Fax (650) 938-0241 Email: sales@Telulex.com

Mountain View, CA 94043 CIRCLE 318 ON FREE INFORMATION CARD

PIC'n Books

LEARN ABOUT PIC16/17 MICROCONTROLLERS

EASY PIC'n

Beginner

- Programming techniques Instruction set Addressing modes Bit manipulation Subroutines Sequencing Lookup tables Interrupts
- Using a text editor source code
- Using an assembler · Timing and counting
- · Interfacing I/O conversion
- · Lots of examples
- \$29.95

PIC'n Up The Pace

Intermediate

- Serial communication PIC16 to peripheral chips PIC16 to PIC16
- Serial EEPROMS
- LCD interface
- Scanning keypads
- D/A conversion · Sensors - analog voltage
- output
- A/D conversion
- · Math routines Decimal interface
- PIC16F84 EEPROM data
- memory · Lots of circuits and code
- \$34.95

+ \$4 s/h in US for one book, \$5 both books VISA, MC, AMEX, MO, Check CA residents please add 7.25% CA sales tax PIC is a trademark of Microchip Technology Inc.





ELECTRONICS

P.O. Box 501, Kelseyville, CA 95451 Voice (707) 279-8881 FAX (707) 279-8883 Web Site: http://www.sq-1.com E-Mail sqone @pacific.net



µLink™ Infrared Remote Control System

- 4 Channel IR keychain Transmitter (pcb 1.1"x 1.2") IRTX4-A
- 4 Channel IR Receiver (pcb 1.1"x 1.9") IRRX4-A
- · Each receiver can LEARN up to 4 transmitters.
- Each transmitter can have a different access level.
- · User selectable receiver output modes.
- Up to 9m Range. Great for security and hobby applications.
- RX and TX IC's available.
 - Only \$39.95/pair + S&H, additional IRTX4-A units \$19.95

SURFACE MOUNT KITS:

- Pager Decoder Interface
- Garage Door Openers

ÆC

ÆC

ÆC

ÆC

Many IR and RF kits!

Wireless SMT RF kits:

- XTAL mics, 3 bands!
- Quality LC tuned FM mic
- Phone transmitters

Orders: 1-800-417-6689 Mon-Fri 9AM-6PM ET visa/mastercard/money orders

email: iecorp@i-e-c.com web: http://home.earthlink.net/~iecorp

IEC♦PO Box 52347♦Knoxville TN 37950

COPYRIGHT @1998 International Electronics Corp.



Remove 100's of good IC's per hour Won't damage IC's or circuit boards



8 Desoldering Tools (Remove 6 thru 40 pin IC's) 10 Desoldering Tools (Remove 6 thru 64 pin IC's) \$114.95

FRANKS ELECTRONICS

P. O. BOX 357 - GLEN, MISS. 38846 Orders By Mail Only. No COD's.

SC552ES CONTROLLER



APPLICATION

READY ONLY

- 80C552 @ 22MHz
- Enhanced BASIC Language
- . 6"x9" circuit board • 10 5A relay outputs
- 3 LED or logic outputs 16 opto-isolated inputs
- · 8 ch. 10 bit analog inputs • 2 ch. 8 bit analog outputs
- Real Time clock/calendar . 128K Static RAM
- 128K FLASH memory
- 256 byte serial EEPROM 3 serial ports (RS232/485)
- IIC bus expansion
- Plug-on I/O terminal blocks

· Single 12Vdc operation



519 Richard Street, Thunder Bay, Ontario, Canada P7A 1R2 Ph. 807-768-2487 Fax 807-767-0587 www.sylvacontrols.com info@sylvacontrols.com

Make your own circuit boards at home!!

Don't project-board your electronics circuits, Afford-A-Board them!! Our complete line of circuit board manufacturing equipment lets you create professional single or double-sided circuit boards in your own home. We manufacture affordable, developing, etching and stripping tanks. Afford-A-Board is your source for 2-sided photo-sensitive copperclad board.

12x12 FR4 1 oz. DS \$15.99

Call for our low, low pricing on film, chemicals and drill bits.

Afford-A-Board

P.O. Box 32613 Kansas City, MO 64171 Tel: (913) 385-1843 Fax: (913) 895-9330 (888) 454-1017

VIsa/AMEX/MC/Cash COD/MO

Printed Circuits in Minutes Direct From LaserPrint!



- 1. LoserPrint*
- 2. Press On**
- 3. Peel Off
- 4. Etch

Use Standard Copper Clad Board

20 Shts \$30/40 Shts \$50/100 Shts \$100

Visa/MC/PO/Ck/MO \$4 S&H Techniks Inc. P.O. Box 463 Ringoes NJ 08551 ph. 908.788.8249 fax 908.788.8837 http://chelsea.ios.com/~techniks Retail Dealer Inquires Invited

Microcontroller Tools

PIC In-Circuit Emulator for the PIC16Cxx from \$295 PIC Programmer \$155

80C552 (8051) Development Training System \$235

68HC11 SBC \$120

ROMY-16 EPROM Emulator from \$195

Universal Microprocessor Simulator/Debugger (including Assembler, and Disassembler) \$100 each CPU

J&M Microtek, Inc.

83 Seaman Rd, W Orange, NJ 07052 Tel:(973)325-1892 Fax:(973)736-4567 http://www.im-micro.com

68HC11 Modules for Solderless Breadboards

miniature 2.0" by 2.8" module readboard for easy development BOOT/RUN switch for easy programming via PC serial port all I/O lines on dual row connector Complete modular prototyping system! Expansion accessories available!



Epanón accesories avallabel

For just U574-95, our Starter Package (ADIISP) provides everything you need to get going fast! Now you can harness the power
of the popular 68HCI1 in your projects! Includes ADAFT-II with
68HCAHE2, providing 2K EFROM (re-programmable), 8 channe
8-bit Analog-to-Digital Converter (ADC), hardware timers, counters, Interrupts, Serial Peripheral Interface 65PJ), Serial Communications Interface (SCI), & more! On-board RS-221 interface (abiincluded), 5-volt regulator, 8MHz crystal, reset circuit, and convenient program/run switch. Comes with non-commercial versionient program/run switch. Comes with non-commercial versionHCII Assembler, BASIC, & C, as well as handy utilities & examvitle & program your software, a DC power supply, and a solderwrite & program your software, a DC power supply, and a solderleas breadloard (or protoboard) to build your application circuits
on (or use our modular accessories).

TECHNOLOGICAL ARTS

308 Aragona Blvd., Suite 102, Box 418, Va. Beach, VA. 23462 1644 Bayview Avenue, Box 1704, Toronto, ON M4G 3C2 voice/fax:[416] 963-8996 www.interlog.com/ ~ techart

Slot Machines

\$ 449.00



Slot Machine Demo Video \$ 5.99 40 - Minutes 33" High 20" Wide 14" Deep Brochure \$ 1.00

Magic Box **Test Chips** Filter Kits



Notch Filters www.nutnet.com Video Media

Margate, Fl. 33093 (954)-752-9202

P.O. Box 93/6025



FRIENDLY LITTLE MICRO CONTROLLER



...packs a **MEAN** punch a.k.a. "Steroid Stamp"

- 39 I/O + 8 A/D (10 bit) • I28K SRAM + I28K Flash •
- LCD/Keypad Interface • Fast 16 bit Motorola CPU · Affordable C Compiler ·
- · Comprehensive s/w Library ·

*Intec Automation Inc.

v: 250-721-5150 fx: 250-721-4191

THE COLLECTED WORKS OF **MOHAMMED ULLYSES FIPS**

#166-By Hugo Gernsback. Here is a collection of 21 April Fools Articles, reprinted from the pages of the magazines they appeared in, as a 74page, 81/2 × 11-inch book. The stories were written between 1933 and 1964. Some of the devices actually exist



today. Others are just around the corner. All are fun and almost possible. Stories include the Cordless Radio Iron, The Visi-Talkie, Electronic Razor, 30-Day LP Record, Teleyeglasses and even Electronic Brain Servicing. Get your copy today. Ask for book #166 and include \$16.00 (includes shipping and handling) in the US and Canada, and order from CLAGGK Inc., P.O. Box 4099, Farmingdale, NY 11735-0793. Payment in US funds by US bank check or International Money Order. Allow 6-8 weeks for delivery.

Lane Norman - Norman's Electronics Inc. Atlanta GA 404-451-5057 A cost effective solution to desoldering equipment at less than half the price of mastrounding. ce of most equipment. It's performance is

Mike Murphy - Service Center -Van Nuys CA 818-785-7805

The single best investment of repair equipment we've made. It outperforms all other desoldering tools we've used. Easier to use and least expensive.

uicker Vacuum

George McKinzie - MCK Electronics, Inc. - Nisswa MN - 218-963-4400 A marvelous instrument, a real time saver and has a tremendous vacuum for it's size. The size and portability is also a great advantage.

Dick Manning - Dicks Electronics - Hartland WI 414-367-8339 The case & speed of component removal greatly increases productive time. The SMD kit makes SMD removal a breeze, even for inexperienced Techs.

George Hefner - Hefner Electronics - Coleridge NE 402-283-4333 Being a one-men service center, I hesitated to spend the money on a desoldering tool, however all that changed when I nearly ruined a \$400 computer logic board. It has cut my desoldering time by 50%

Service Managers, Owners, CEO's, CFO's

My personal guarantee to you is that after 90 days of ownership, if you are not convinced that you have made a wise decision for your business with the purchase of the SC-70003 desoldering tools, your investment will be fully refunded with the return of the merchandise. Now you have no reason not to try it.

Gerry Howard. President.

- Totally Self Contained diaphragm vacuum pump and AC motor for high vacuum suction or reversible hot air blow for SMD removal.
- 100Watt Ceramic heater with zero-crossover switching heater control circuit which prevents spikes and leakage currents.
- Unique patented long lasting filter cartridge design. Solder builds up on easily cleaned baffle, while air flows around the outside of baffle.
- Totally ESD Safe. The housing contains carbon and the tip is at

FREE TRIAL Available on Request

Sale Price \$395.00

> Price includes stand worth \$25.00 one extra filter, and two tip cleaners.

Don Cressin - Certified Electronics Service - Ellicott City MD 301-461-

We have obtained excellent results with the SC7000Z including epairing high density U/V tuners. It is one of the best

purchases we have made.

Doug Pettit - LuRay Sectronics - LuRay VA 703-743-5400

We found that the SC7000Z not only saves money vs. wick, but saves valuable time in troubleshooting. It allows you to be more accurate in removing SMD's.

Randy Whitehead - Service West - Salt Lake City UT 801-262-4069 My Techs thought it would be a waste. I bought one anyway after a demo. My Techs then fought over it. Now we have three. It is the Bost desplaying tool we have ever Best desoldering tool we have ever

Check us out on the WEB http://www.heinc.com Order from web site for 5% discount

New Specifications

- AC100V,120V,230V,50/60Hz
- -120W ♦ Power Consumption-
- ♦ Pump-Diaphragm Type
- 12W **♦** Motor Output
- ♦ Vacuum Attained--650mmHg
- **♦** Temperature Range-300°C-500°C (572°F-932°F)
- Air Flow Rate--15 Liter/Minute (Open)
- Heater 100W (Ceramic)
- Feed Back Zero Cross-over Type Control System-
- Net Weight-420Grams
- Max.Temp. of Hot Blow--400°C
- ♦ The Most Cost Effective Desoldering Tool in the World.

Visa - M/C - Discover - American Express - Terms to Qualifying Companys 30 Day Money Back Total Satisfaction Guarantee - One Year Parts and Labor Warranty




Toll Free U.S. and Canada

Web Site www.heinc.com E-Mail sales@heinc.com International (316) 744-1993 or Fax (316) 744-1994

99





Visit our web site! www.mouser.com

FREE catalog is available on the internet, CD-ROM, or in paper!

- 70,000+ Products 145 Suppliers
- · Same Day Shipping · No Minimum Order

800-992-9943

817-483-6828 Fax: 817-483-0931

www.mouser.com

catalog@mouser.com

958 North Main St., Mansfield, TX 76063

CIRCLE 325 ON FREE INFORMATION CARD





YOUR MIDWEST PANASONIC CONVERTER WHOLESALER

PANASONIC

TZPC1453G2

"Top of the line converter" featuring sleep timer, parental lock, standard/HRC switchable, last channel recall, favorite channel memory, and 83 channel capable.

One of our best selling converters featuring sleep timer, parental lock, last channel recall, favorite channel memory, and 80 channel capability.

TZPC175DG2

Our "Top of the line" converter with volume control. Featuring sleep timer standard/HRC switchable, parental lock, last channel recall, favorite channel memory and 83 channel capable.

Phone (810) 739-2710 Fax (810) 739-3517

Crystal-Controlled UHF Micro Video Transmitter

Surface mount module transmits high-resolution COLOR or B&W video for over a quarter mile! WHY PAY MORE?



• 100mW RF output

• Operates on 9-12VDC

Transmits 2 days on 9V battery
 Receive on cable TV channel 60

• Auto bias, sync & polarity protection

• 30 DAY MONEYBACK GUARANTEE!

Includes schematic diagram and detailed information on how it works!

All orders shipped by UPS & include regular updates on NEW high-tech products, plans & kits!

VISA, M/C, CK, MO, COD. Add \$4.50 S&H. DECO, Box 607, Bedford Hills, NY 10507 ORDER 1-888-DECO-1998 24 HOURS TECH / INFO 914-243-0346 PHONE / FAX

The Electronic Experimenter's Journal

It's part catalog, part magazine and part data book with kits, parts, plans, articles, and application notes. Call for your FREE

copy today

Debco Electronics

4025 Edwards Rd. Cincinnati, OH 45209 1 800 423 - 4499

Cable T.V. Converters & Equipment

Prices Dealer 30-Day Money back

1-vear warranty MC, Visa, AE, COD



www.cable4you.com

-(800) 888-5585

SURVEILLANCE

The Latest High Tech Professional Electronic Devices

Our latest catalog offers a HUGE selection of surveillance, countersurveillance/privacy devices: hidden video equipment, pinhole cameras \$14900, telephone recording systems: 12-Hour \$13900 16-Hour \$19900 touch tone decoders, scanners,

bug/phone tap detectors, voice disguisers, telephone scramblers, locksmithing tools, and more. Catalog \$5.00

SPY OUTLET

P.O. Box 337, Buffalo, NY 14226 (716) 695-8660/(716) 691-3476

Make Life Easy!

Program these PICs in BASIC:

12C671, 12C672, 14000, 16C554, 16C556, 16C558, 16C620, 16C621, 16C622, 16C62, 16C63, 16C64, 16C65, 16C71, 16C72. 16C73, 16C74, 16C84, 16F83, 16F84, more.



BASIC makes it easy for you to program the fast and powerful Microchip PIC microcontrollers.

- Expanded BS1/2 compatible instruction set
- . True compiler provides faster program execution and longer programs than BASIC interpreters

new! PicBasic Pro Compiler - \$249.95 PicBasic Compiler - \$99.95 EPIC Pocket PIC Programmer - \$59.95 PICProto Boards - \$9.95 to \$17.95

micro Engineering Rabs, Onc. Box 7532 Colorado Springs CO 80933 (719) 520-5323 fax (719) 520-1867

http://www.melabs.com

QUALITY **PARTS**

FAST SHIPPING

DISCOUNT PRICING

CALL, WRITE, or E-MAIL For A Free 96 Page CATALOG.

Outside the U.S.A. send \$3.00 postage.

Stepper Motor Controller IC

E-Lab # EDE-1200

CAT# EDE-1200

Controller IC for unipolar stepper motors. Designed to interface a logic-level signal to a stepper motor. Also capable of running independently (self-clocking). Allows for halfstepping and directional control. TTL/CMOS compatible inputs. TTL-level outputs. 18 pin DIP package. 5 vdc operation. Works for most unipolar stepper motors. Includes specs and hook-up diagram. **7**50

PRICE REDUCTION! SL WABER"PowerMaster Surge/Noise Suppressor

Protect your computer, phone, VCR, TV and stereo equipment from damaging transient voltage surges. Just plug in, and you've got full 3-line protection. Visual indicator lets you know that the device is functioning. UL, CSA listed.

CAT # PW-103 Formerly \$3.75

S-VHS Tape (Used)



Super VHS tape users! Save a bundle on name-brand S-VHS, T-120 tapes. These tapes were used for a brief period, then bulk erased. The record-protect tabs

will have to cover the notch with a piece of tape, but they work great and cost a fraction of the "new" price. Try some, you'll be back for more. 00

CAT #S-VHS

10 for \$28.00 • 100 for \$250.00

Shielded Woofer

Designed for use in Infinity center channel video sound systems. These well constructed woofers have shielded magnets to prevent interference with

picture quality. 5 1/4" 6 OHM

1" voice coil. 8 oz. magnet. 50 watts max power. 3.125" deep.

CAT # SK-7346

000 each

12 for \$96.00

Miniature Temperature Sensor (THERMISTOR)

Keystone (Similar to #RL0503-17-56K-96-MS) 30K ohms @ 25 degree C. (77 degree F.) Negative temperature coefficient. 0.2" long X 0.09" diameter, epoxy insulated bead. 1.13" long teflon insulated AWG#30 wire leads. Prepped with 0.75" long metal tabs.

CAT# THR-19

box of 264 \$150.48 (57¢ each)

3 Volt Lithium Coin Cell

Panasonic # BR2330-1GU 3 volt, 255 mAh coin cell. Lithium batteries have a very long shelf life and are great for memory back-up protection. 0.9" diameter x 0.12" thick. 0.7" between positive and negative pc leads

CAT #LBAT-16

20 for \$12.00 100 for \$45.00 1K for \$300.00

Ferrite Bead

TDK # HF70RH 16X28X9 1.1" x 0.63" od x 0.35" id.

CAT # FB-24 \$1.00 each 10 for \$8.50 - 100 for \$70.00



RED Ultrabright LED


PAINFULLY BRIGHT RED LED

2500 to 4000 mcd @ 20 ma. These T 1 3/4 (5 mm diameter) red LEDs are significantly brighter than conventional LEDs. At close range, they are painful to look at. They are great for attention getting displays that can be seen from a distance. Water clear in off-state.

CAT # LED-42 2 for \$1 20

10 for \$5.00 100 for \$45.00 1000 for \$400.00

High Brightness FLASHER LEDS



CAT # LED-4 2 for 90¢ 100 for \$40.00 - 1000 for \$300.00

Stepper Motor



Unipolar, two-phase, 6 lead stepper motor. 500 ohm coil. 7.5 degrees per step. 1.4" dia. X 0.7" body. Oval mounting flange has holes on 1.65" ctrs. 0.08" (2mm) dia. shaft is 0.4" long and is fitted with a 0.31" dia. gear 100 with 18 teeth. 15" leads. each CAT # SMT-28

"HI-8" Video Cassette

SONY Hi-8 Top quality. metal particle 120 minute video cassettes. Used for a short time, then bulk-erased. Each cassette has its own plastic storage box.

CAT # VCU-8

10 for \$28.00 100 for \$250.00

ORDER TOLL FREE

-800-826-54

MAIL ORDERS TO: ALL ELECTRONICS CORP. P.O. BOX 567 VAN NUYS, CA 91408-0567

FAX (818) 781-2653 • INFO (818) 904-0524 INTERNET http://www.allcorp.com/ E-MAIL allcorp@allcorp.com



DISCOVER

NO MINIMUM ORDER • All Orders Can Be Charged to Visa, Mastercard, American Express or Discover • Checks and Money Orders Accepted by Mail • Orders Delivered in the State of California must include California State Sales Tax • NO C.O.D. • Shipping and Handling \$5.00 for the 48 Continental United States - ALL OTHERS including Alaska, Hawaii, P.R. and Canada Must Pay Full Shipping • Quantities Limited • Prices Subject to change without notice.

MANUFACTURERS - We Purchase EXCESS INVENTORIES... Call, Write, E-MAIL or Fax YOUR LIST.

USE ELECTRONICS NOW CLASSIFIEDS

READ BY ELECTRONIC BUYERS AND SELLERS AND TRADERS

INSTRUCTIONS FOR PLACING YOUR AD!

HOW TO WRITE YOUR AD TYPE or PRINT your classified ad copy CLEARLY (not in all capitals) using the form below. If you wish to place more than one ad, use a separate sheet for each additional one (a photo copy of this form will work as well). Place a category number in the space at the top of the order form (special categories are available). If you do not specify a category, we will place your ad under miscellaneous or whatever section we deem most appropriate.

We cannot bill for classified ads. PAYMENT IN FULL MUST ACCOMPANY YOUR ORDER. We do permit repeat ads or multiple ads in the same issue, but in all cases, full payment must accompany your order.

WHAT WE DO

The first word and company name of each ad are set in bold caps at no extra charge. No special positioning, centering, dots, extra space, etc. can be accommodated.

RATES

Our classified ad rate is \$2.50 per word. Minimum charge is \$37.50 per ad per insertion (15 words). Any words that you want set in bold are each .40 extra. Indicate bold words by underlining. Words normally written in all caps and accepted abbreviations are not charged anything additional. State abbreviations must be post office 2-letter abbreviations. A phone number is one word.

If you use a Box number you must include your permanent address and phone number for our files. ADS SUBMITTED WITHOUT THIS INFORMATION WILL NOT BE ACCEPTED.

For firms or individuals offering Commercial products or Services. Minimum 15 Words. 5% discount for same ad in 6 issues within one year; 10% discount for same ad in 12 issues. Boldface (not available as all caps), add .40 per word additional. Entire ad in boldface, add 20%. Tint screen behind entire ad, add 25%. Tint screen plus all boldface ad, add 45%. Expanded type ad, add \$4.00 per word.

General Information: A copy of your ad must be in our hands by the 13th of the fourth month preceding the date of issue (i.e. Sept issue copy must be received by May 13th). When normal closing date falls on Saturday, Sunday or Holiday, issue closes on preceding work day. Send for the classified brochure.

DEADLINES

Ads not received by our closing date will run in the next issue. For example, ads received by November 13 will appear in the March issue that is on sale January 17. ELECTRONICS NOW is published monthly. No cancellations permitted after the closing date. No copy changes can be made after we have typeset your ad. NO REFUNDS, advertising credit only. No phone orders.

CONTENT

All classified advertising in ELECTRONICS NOW is limited to electronics items only. All ads are subject to the publishers' approval. WE RESERVE THE RIGHT TO REJECT OR EDIT ALL ADS.

AD RATES: \$2.50 per word, Minimum \$37.50

Send you ad payments to:

ELECTRONICS NOW 500 Bi-County Blvd, Farmingdale, NY 11735-3931

CATEGORIES

100 - Antique Electronics	270 - Computer Equipment Wanted	450 - Ham Gear Wanted	630 - Repairs-Services
130 - Audio-Video Lasers	300 - Computer Hardware	480 - Miscellaneous Electronics For Sale	660 - Satellite Equipment
160 - Business Opportunities	330 - Computer Software	510 - Miscellaneous Electronics Wanted	690 - Security
190 - Cable TV	360 - Education	540 - Music & Accessories	710 - Telephone
210 - CB-Scanners	390 - FAX	570 Plans-Kits-Schematics	720 - Test Equipment
240 - Components	420 Ham Gear For Sale	600 - Publications	730 - Wanted

CLASSIFIED AD COPY ORDER FORM								
Place this ad in Category # Special Category \$30.00 Additional								
1 - \$37.50	2 - \$37.50	3 - \$37.50	4 - \$37.50	_	29 - \$72.50	30 - \$75.00	31 - \$77.50	32 - \$80.00
5 - \$37.50	6 - \$37.50	7 - \$37.50	8 - \$37.50	-	33 - \$82.50	34 - \$85.00	35 - \$87.50	36 - \$90.00
9 - \$37.50	10 - \$37.50	11 - \$37.50	12 - \$37.50		37 - \$92.50	38 - \$95.00	39 - \$97.50	40- \$100.00
13 - \$37.50	14 - \$37.50	15 - \$37.50	16 - \$40.00	_	Tota	al words	\$2.50 per v	vord = \$
17 - \$42.50	18 - \$45.00	19 - \$ 47.50	20 - \$50.00		Во	old Face	\$0.40 per v	vord = \$
21 - \$52.50	22 - \$55.00	23 - \$57.50	24 - \$60.00		Special l	Heading	\$30.00	= \$
25 - \$ 62.50	26 - \$65.00	27 - \$67.50	28 - \$70.00	_		Other	:	= \$
Total classified ad payment \$ enclosed						TOTA	AL COST OF A	D \$
[] Check	[] Mastercard	[] Visa [] Discover	Card #			Expiration Date	/
				Signature_				
Name_					Phone			

Electronics Now, May 1998

102

Address_ _City State Zip _



FLAT PANEL KEYPADS ASSEMBLE IN MINUTES WITH YOUR LEGEND

AVAILABLE IN 4, 12, 16, 24 & 40 KEY TYPES



\$9.89

DSK-12 \$14.29

INDUSTRIAL TYPES **AVAILABLE**

MORE THAN 30 LAYOUTS TO FIT MOST **APPLICATIONS**

> CALL FOR FREE BROCHURE

SIL-WALKER

880 CALLE PLANO, UNIT N CAMARILLO, CA 93012

PHONE: (805) 389-8100 FAX: (805) 484-3311

VISA / MASTERCARD

Cable TV Outlet

Factory

Direct!

Get the Clearest Coverage

of Sports, Movies, News,

-Unbeatable Wholesale Pricing-

-Converters/Descramblers-

-Filters and Accessories-

-Premium Channel Coverage-

-Full Satisfaction Guaranteed-

Open M-F 9a to 5p (CT)

1-800-249-3025

Visa, MC & C.O.D.'s Welcome

Main Events and Adult!



FCC License Preparation

Avionics, Marine, Radar exam-prep HOMESTUDY, fast, easy & inexpensive Manuels, Audio, Video, Disks *** GUARANTEE PASS*** FREE BROCHURE-1-800-800-7555 See on-wptpub@worldaccessnet.com WPT PUBLICATIONS



Get your copy of the



Go back to antiquity and build the radios that your grandfather built. Build the "Quaker Oats" type rig, wind coils that work and make it look like the 1920's! Only \$10.95 plus \$4.00 for shipping and handling. Claggk Inc., P.O. Box 4099, Farmingdale, NY 11735. USA Funds ONLY! USA and Canadano foreign orders. Allow 6-8 weeks


There's a life to be saved right now.

Please give blood.

Call 1-800 GIVE LIFE









The TV Pro is just the tool for your repair bench. It provides Video, S-Video, and RF outputs. It also

has the most important pattern, GRAY SCALE! You can't set up a color TV without it All with NTSC standards and COMPLEX sync. The RF output also includes an audio tone and STEREO signaling With colorbars, gray scale, crosshatch with dots you can set and test quickly.

Monitor Test Equipment

Checker 12e

Now you can repair and test Computer monitors

with ease. With sweep rates up to 64Khz., eight step gray scale, white screen, single color mode. Mac II, EGA, CGA support, you can run almost ANY PC monitor. And it is EASY to use. Color

front panel displays show just what you should see. Don't let its' small size fool you. It is

the most powerful handheld available, and it

supports ALL basic VGA modes (some don't). It is suitable for bench or field operations. Battery

Checker Jr.

Looking for a SMALL battery operated monitor

test pattern generator that will fit in your pocket?

The Checker Jr. is it. It displays a very useful 64 color pattern. You can evaluate size, focus.

linearity, color tracking, and balance. It operates

in the 640 480 mode (31.5Khz - 60Hz.). and is

Checker TV Pro

& TV Jr.

PRICE: \$99.95

very easy to use. Use it anywhere.

PRICE:\$295

or AC operation.

Checker TV Pro..PRICE: \$499.95

The TV Jr is a small NTSC video generator with colorbars crosshatch with dots, white red blue green, and black screens. Small enough to fit in your pocket, powerful enough to drive the largest projection TV!

Checker TV Jr....PRICE: \$129.00

🥯 Computer & Monitor 🚅 Maintenance, Inc. 1-800-466-4411 • 770-662-5633

http://www.computermonitor.com

103



Check Web!! --

www.m2l.com

Fast - Programs 27C010 in 23 seconds

Portable - Connects to PC Parallel Port Versatile - Programs 2716-080 plus EE and Flash (28F,29C) to 32 pins

Inexpensive - Best for less than \$200

- · Correct implementation of manufacturer algorithms for fast, reliable programming
- Easy to use menu based software has binary editor, read, verify, copy, etc. Free updates via bbs or web page.
- Full over current detection on all device power supplies protects against bad chips and reverse insertion.
- Broad support for additional devices using adapters listed below.

Available Adapters

EP-PIC (16C5x,61,62x,71,84) \$49.95 EP-PIC64 (62-5,72-4) \$39.95 EP-PIC17 (17C5x) \$39.95 EP-PIC17 (17C4x) \$49.95 EP-51(8751 C51) \$39.95 EP-11E (68HC11 EJA) \$39.95 EP-11D (68HC711D3) EP-16 (16bit 40pin EPROMS) EP-Z8(Z86E02,3,4,6,7,8) \$39.95 \$39.95 EP-5E2 (286E02,3,4,6,7,8) EP-SEE2 (93x,24x,25x,85x) EP-750 (87C750,1,2) EP-PEEL (ICT22V10,18V8) EP-1051 (89C1051,2051) EP-PLCC (PLCC EPROMs) EP-SOIC (SOIC EPROMs) \$39.95 \$59.95 \$59.95 \$39.95 \$49.95 \$49.95

Many Other Adapters Av M²L Electronics

310/837-7818 Fax/BBS: 310/841-6050 3526 Jasmine #4; Los Angeles, CA 90034 CA orders add 8.25% sales tax. http://www.m2l.com



COMPLETE INTEGRATED CAD/CAE SYSTEM Schematic, Simulation and Layout

EDWIN NC Delux 3

- Full integration of Schematic and Layout
- On-line help
- Library viewer with editing possibility
 Up to 100 schematics sheets
- Up to 32 layers
- Automatic DRC with user specified parameters
- Automatic component renaming

 Mixed-mode simulation (AC, DC and TD analysis) Optionals:
- Thermal Analysis for PCI: \$ 29.99
- ⇒ EDSpice Simulator (Spice): \$ 59,99
- EDCoMx (Spice model generator): \$29,99

* The "NC" version (Non-Commercial) is destinated <u>only for</u> students, hobbests and educational institutions. Companies must purchase the "Professional" version. However, there aren't any differences between "NC" and "Professional" version.







P.O. Box 55-8207 Miami, Florida 33255-8207

Phone: (305) 267-4005 Fax: (305) 267-0709 Web site: http://www.edashop.com



For Free Information Package and Pricing

www.south-bend.net/rcd





Quality Microwave TV Systems WIRELESS CABLE - ITFS - MMDS ATV - INTERNATIONAL - S-BAND Amplifiers - Antennas - Books - Components Filters - Systems - Video Products - RF Frequency 1990 - 2700 MHz - Cable Ready - VHF - UHF Outputs - SASE For FREET Catalog or Send \$1

PHILLIPS-TECH ELECTRONICS
PO Box 8533 • Scottsdale, AZ 85252

Your * BOOK Mailorder * PARTS * Source * VIDEOS For Robots! (REQUEST OUR FREE CATALOG) www.cobatstoce.com Or write to us: 4286 Redwood Hwy #226-137 San Rafael CA 94903 Phone 415-491-4600 • Fax 415-491-4696 Email info@mondo.com


MONDO · TRONICS'

Call 219-236-5776

Electronics Now, May 1998



Buy more than 1 book and take 15% off total order













Simplified Design of Switching Power Supplies by John D. Lenk

1996 · 225pp · pa · 0-7506-9821-7 • \$29.95

Simplified Design of IC Amplifiers by John D. Lenk

1996• 240рр • ра • 0-7506-9508-0 • \$29.95

Lenk Series

Simplified Design of Voltage-Frequency Converters by John D. Lenk NEW

September 1997 · 304pp · pa · 0-7506-9654-0 · \$29.95 Simplified Design of Data Converters NEW by John D. Lenk April 1997 • 242pp • pa • 0-7506-9509-9 • \$29.95

Simplified Design of Linear Power Supplies by John D. Lenk

1996 • 246pp • pa • 0-7506-9820-9 • \$29.95

Simplified Design of Micropower and **Battery Circuits** by John D. Lenk 1996 • 240pp • pa • 0-7506-9510-2 • \$29.95

Audio Power Amplifier Design Handbook





More Books from Newnes

PCB Design Using AutoCAD by Chris Schroeder

Aug 1997 • 336pp · pa · 0-7506-9834-9 • \$44.95

Audio Power Amplifier Design Handbook

by Douglas Self 1996 • 256pp • pa • 0-7506-2788-3 • \$34.95

Understand Electronic **Filters**

by Owen Bishop 1996 • 180pp • ha • 0-7506-2628-3 • \$26.95

High Performance Audio Power Amplifiers

by Ben Duncan 1996 • 288pp • ha • 0-7506-2629-1 • \$59.95



Digital Storage Oscilloscopes

by Ian Hickman 1996 • 208pp • pa • 0-7506-2856-1 • \$39.95





Please send me the book(s) listed below. (Buy more than one, and take 15% off the total order.)

\$52.95

toCAD

Write book number(s) here:

	: Butterworth-Heine wood Ave., Woburn,	
Name		
Address		
City	State	Zip
Phone	Fax _	
E-mail		
☐ Please send n	ne a free Newnes o	atalog, Item #645

Phone:	1-80	0-366	воок
	Y7	**	

Fax: 1-800-446-6520 E-mail your order to orders@repp.com

I have enclosed a check for \$ ☐ Please charge my:

Visa □ MasterCard □ American Express

Card no. __ Exp. date ___

Signature

U.S. Customers: Please add \$4.00 handling fee for the first item ordered, \$1.50 for each additional item, to all check and credit card orders. Billed orders will be charged additional shipping based on weight and destination. All U.S. orders must include your state sales tax. Prepayment or company purchase order is required for all orders. Prices subject to change without notice.

Canadian Customers: Please pay by credit card or in U.S. funds and include 7% GST on books and handling. European Customers: Add £2.00 UK and surface postage.

Check for Air

Mail: extra cost will be charged. A member of the Reed Elsevier plc group

TS232

Visit our web site: http://www.bh.com/newnes

105

The Only 100% Legal, FCC approved, DESCRAMBLER you can buy!

NAVIGATOR II...

NAVIGATOR II

The only legal way to own your converter!

- 250 Channel Capacity
- Subscribe to two different cable systems simultaneously
- Interactive On-Screen Display
- Watch one premium channel while recording another
- Electronic program guide shows all programming over next 7 days
- One Touch Recording

NO RENTAL FEES!
Advanced
Features!

Most advanced set-top you can buy!

Save Money!

FCC & UL Approved

DYNAMIC Technologies • Phone: 1-800-643-4258

Suite 541064 . Boystown, NE 68154

CIRCLE 312 ON FREE INFORMATION CARD



SEE WHAT TAKES SHAPE. EXERCISE.

American Heart Association



4 MAZING PRODUC

ELECTRONIC & SCIENTIFIC DE



BOUNCE SCIENCE PROJECTS

USES SCATTERED AND DIRECT REFLECTIONS

Remarkable concept allows user to hear sounds within a premise over a beam of laser light reflected from a window or similar surface. Experimental device provide window or similar surface. Experimental device provide hours of interesting and educational use. Utilizes a visible red laser that simplifies alignment and discourages illegal use. Usable range will vary-expect about 20 to 50 meters. Optional lens will increase range 200 to 400 meters. Further range requires expensive optics. Requires a sturdy video tripod (not incl.) Caution-check local law in your state if planning to use for accessing oral communication. REGUIRES OPTICAL ALIGNMENT

DANGER

System setup shown using scattered reflection method 展堂 LWB5 Plans......\$20.00 LWB5K KIT/PLANS.....\$149.50

LWB50 Ready to Use With Selected Laser Pointer.....\$249.50 LWB70 Above With High Performance Laser Gun Sight, Long Range

SELECTED FOR COHEREN

4+mw 0650nm visible r

BATTERY OPERATED 6 hr

ALL PARTS TO BUILD 6 EXCITING TRANSMITTER PROJECTS

Super Sensitive Ultra Clear 1Mile+ Voice Transmitter

1 Mile + Telephone Transmitter

Line Powered Telephone Transmitter Never Needs Batterlesit 3

Tracking/Homing Beacon "Beeping Transmitter"

Transmitter Rebroadcasts Video or Audio Outputs Short Range TV/FM Disrupter NEAT PRANKIII Discretion Advised

All 6 Above Kits Plus FREE Info Dala Pack on "HELPFUL HINTS" Building and Tuning" Wireless Dev

GRAVITY GENERATOR

levitation. Levitate an Object! GRA1 Plans and Book.....\$20.00

GRA1K Pwr Sup Kit/Plans...\$99.50 GRA10 Assbled Pwr Sup...\$149.50

ELECTRONIC HYPNOSIS

AND MIND CONTROL

Generates Highly Effective Audible and Visual Stimuli

With Bio-Feedback That

Will Bio-reedback That Can Induce Hypnotic as Well as ALPHA Relaxed States of the Mind, Place Subjects " Under" Your

Control, Enhances Hidden PSYCHIC Ability in Many

MIND2K Kit and Plans.....

MIND Plans...

COMBOX Parts and Plans for above!..\$59.50 COMBOP Plans for all the above!......\$10.00

Demonstrates a unique phenomena of electrical

demonstration of a

fascinating method of

reactions that produce the effect of "anti-gravity". You build and levitate a small

mock space ship from simple materials. Excellent scientific

Extender Lens and Cushioned Headsets.....\$299.50 **ULTRA BRIGHT LASERS**

4 to 7x brighter 650-630 nm Radiation

ALL METAL CONSTRUCTION 1 YEAR WARRANTEE

BATTERIES INCLUDED LAPN65 15mw equiv 2000 ft... ..\$29.95 OCUSABLE From a Sm Dot for Large Spi

LASER POINTERS

LAPN65F Focusable Above LAPN65...\$39.95 LAPN63F Focusable/4000' Range.....\$69.95

DB

Complex Output Devices Projects Visible Lines, Doshed Lines, and Geometric Shapes and Potterns. Great Construction Aids or Special Lighting Effects. ELEDE Produce a Small Light Show LASER PATTERN GENERATOR

5 Complex Light Designs Fits on Your Key Chain Includes 3 LR44 Batteries LAPN65PT 15 mw equiv@670nm...\$29.95

TRANSISTORIZED TESLA COIL

TURNS A LIGHT BULB INTO A SPECTACULAR PLASMA DISPLAY

Transmits Wireless Energy Noiseless Operation Pyrotechnic Effect 12 VDC/5 Amos or B VDC/5 Amps or Battery 115 VAC Optional Converter Adjustable Frequency Control For Effect



TCL5 Plans	\$8.00
TCL5K Kit/Plans	
TCL50 Ready to Use	
12DC/7 12VDC@7Amps	

HOVERBOARD PLANS

Kit Soon to be Available
28 Pages of 'how to' build a
magnello force field capable of
containing a column of lonized air
up to several pall Proven theory
may require additional experiment HOVER Plans.....\$25.00

3 MI FM BROADCAST TELEPHONE TRANSMITTER

Tunable On FM Broadcast. Excellent Telepho Project. Only Transmits When Phone is Used VWPM7K Kit/Plans\$39.50 BEEP1K Beeper Alert Kit..\$19.95

IGH POWER STUNGUNS

STUN 100 100KV StunGun...\$29.50 STUN 200 200KV StunGun...\$49.50 STUN300 300KV StunGun...\$69.50


ACOBS LADDER

Observe a pyrotechnical display of "traveling" fler plasma. Starts off as 1/2" and expands to over 3" before evaporating into space. This is an excellent attention getting display as well as a winning science project!! With arc control.

JACKI Plans	\$8.00
JACKIK Kit Minus Case	\$129.50
JACK10 Ready to Use	
12KVGEN20 Pwr Supply On 12KVGEN2K KIt of Pwr Supp	ly\$99.50
12KVGEN2K Kit of Pwr Supr	bly\$79.50

250KY TESLA COIL 10-14" of Explosive Bolts of Lightning

Transmit Wireless Energy Strange and Bizarre pyrotechnical effects. lon Motors Anti-Gravity Size 20" H x 8" Sq Weight - 25 Pounds 115 Volts/2 Amps AC



HIGH CRIME AREA SECURITY

INFINITY+ TRANSMITTER

MONITOR YOUR PREMISES ACCESS ON GOING CALLS

Longwinded teenogersti CONTROL 8 APPLIANCES

Remote control your homelil EXTRA ADDED FEATUREIII

TELCON3 Plans . \$10.00 TELCON3K Kit/Plans.....TELCON30 Ready to Use... Programmed With built in BEEPER ALERI

PHASOR BLAST WAVE <u>P</u>ISTOL

130 db of Directional Sonic Shock Waves Energy Handheld and Battery Operated PPP1 Plans..... ...\$8.00 .\$49.50 PPP10 Ready to Use \$79.50

ATTENTION!

Battery Powered Mini Sized Modules for research in: HOVERCRAFT, ION GUNS FORCE FIELDS, SHOCKERS etc MINIMAX4 4KV@10ma....



RNING LASER RAY GU BLASTS THRU THE HARDEST OF METALSL CHIVED CLASS 4

All Parts

LAGUN2 Plans.

A FUTURISTIC CONCEPTII\$20.00

BURNING CO2 BENCH LASER

HOTTER THAN MOST TORCHES!



LC7 Plans...

KINETIC ELECTRIC GUN BH VELOCITY PROJECTS. SANTED FOR THE SHE

PIONEER A FUTURISTIC WEAPONI HIGH



JOIN THE RESEARCHI Labeled A Danger

EGUN1 Plans with Parts List......\$20.00 All Parts are Individually Available

3Mi FM BC TRANSMITTER

Safety Product Allows Listening to Children or Invalids in Hazardous Areas, Pools, Ponds etc. Great Security Intrusion Alerti Uses FM Table Top Radio.



FMV1K Kit/Plans......\$39.50 ION RAY GUN PROJECTS ENERGYI Star Wars

Technology Demonstrates / **Weapons Potential!**

Chorage Contraction of the Contr IOG7K Kit/Plans......\$99.50

MIND20 Assembled... TELEPHONE TAPING SYSTEM EXTENDED X4 PLAY.

6

Topes Phone Conversation 20 Mags Input ZI Check Low

TAP30X Ready to Use...... BEEP10 Beeper Alert......

SHOCK FORCE FIELD/ VEHICLE

OBJECT ELECTRIFIER
Horid Shock Bolls,
Wands, Electrify
Objects, Great Payback
for Those Wisseuws

SHK1K Kit of Pwr Module \$19.50

CAUTION

\$84.50

\$15.00

\$89.50

ITTENTION!! RAILGUN EXPERIMENTERS HIGH ENERGY PULSER EXPERIMENTORS AND RESEARCHERS

RAIL GUN, COIL GUN, EXPLODING WATER, ANTIGRAVITY, MASS WARPING, LEVITATION, PLASMA PROPULSION, LATTICE SNAPPING, EMP etc.

Lossless Energy Charging
 Programmable Voltage to 2 KV and Energy Control to 3 KJ
 Triggered Spark Switch [IKJ]
 Universal 12 VDC or 115 VAC
 7.5 X 7.5 X 7" Light weight
 HERR Plans High Forces Pulse (



INFORMATION UNLIMITED DEPT EN 1098 BOX 716 AMHERST, N.H. 03031

24 Hr Toll FREE "Orders Only" Line 1-800-221-1705 Fax Your Order to 1-603-672-5406 9 to 5 pm EST Information Line 1-603-673-4730 See Our Web Site at http://www.amazing1.com We Accept MC, VISA, Cash, MO, Checks. Please add \$5.00 Shipping. COD Orders Add Additional \$4.75. FREE CATALOG ON REQUESTII



The Capacitor Wizard is an extremely FAST and RELIABLE device designed to measure ESR (Equivalent Series Resistance) on capacitors of luf and larger "IN CIRCUIT", eliminating the need to remove the capacitor for accurate tests. The Capacitor Wizard finds BAD caps IN CIRCUIT that even VERY EXPENSIVE cap checkers MISS ENTIRELY, even out of the circuit!! Standard capacitor meters cannot detect any change in ESR therefore they miss bad capacitors leading to time consuming "Tough Dog" repairs. Technicians say it is the most cost effective instrument on their workbench.



http://www.heinc.com Int. # 316-744-1993 Fax 316-744-1994

6222 N. Oliver, Kechi, KS 67067

30 day money back guarantee



CLASSIFIED

MISCELLANEOUS ELECTRONICS FOR SALE

PIECE parts for Delco OEM radios. Low pricing. Factory Original. No subs. Call today, 1 (800) 433-9657.

CHEAP device programmers \$59.95 & up. XU-MICRO, PO Box 14681 Houston, TX 77021. Add \$5.00 S&H

PLANS-KITS-SCHEMATICS

BIO-Stimulator featured in PE June issue. Tone muscles, relieve aches and pains with electronic acupuncture. Updated kit with enclosure \$40.00 plus \$2.50 S&H. RAH PROJECTS, PO Box 15904, N.B., California 92659

ELECTRONIC PROJECT KITS. 49 McMichael St. Kingston, ON., K7M 1M8. \$3.00 catalog. www.qkits.com. QUALITY KITS.

CABLE TV

NEW! Jerrold and Pioneer wireless test units \$125.00 each, also 75DB notch filters \$19.95 each, quantity pricing available. Please call KEN ERNY ELECTRONICS, 24 hour order and information hot line (516) 389-3536.

CABLE descramblers and converters 10 lot decoders \$38.00 ea. 10 lot converters \$57.00 ea. Visa and Mastercard accepted. (304) 337-8027.

CABLE TV Descramblers. One piece units. Ploneer, 6310's Scientific Atlanta 8580's Dpv 7's and others. Lowest prices. Money back guarantee. Precision Electronics Houston, TX. 1-888-691-4610

Free Cable Descrambler Plans. For Details Write: Sierra Publishing, 909 E. Yorba Linda Blvd., Suite H-181, Dept. ENQ, Placentia, CA 92870

Signal Eliminator can block severe TV interference or unwanted channels! Order by channel number - 0 thru 36 available. Only \$30.00 each plus \$4.00 S/H. Quantity discounts. Money back guarantee. Prepay, Visa or Mastercard. COD \$5.00 additional. Visit us on the web today at http://startcircuits.com/tvfilter. Star Circuits, PO Box 94917, Las Vegas, NV 89193. 1-800-433-6319.

CABLE TV major brands including ZENITH ST. 1600 \$249.00 New Zenith add-on \$99.00 Jerrold Model CFT 2014 \$299.00 add-on TVT \$70.00 WHOLESALERS WELCOME 1-800-822-8530

Descramble cable with simple circuit added to Radio Shack RF Modulator and using VCR tuner instructions \$10.00 TELECOM, Box 832-E1, Brushly, LA 70719

CABLE DESCRAMBLERS and converters, shop no more, best prices and tech support. Extreme Electronics 1-888-609-4910

NEW! Cellphone E.S.N. readers \$250 each, cell phone programmers \$175 each, cell phones \$25 each, CSS satelite dish card readers and programmers \$125 each, credit card readers \$250 each, Cable T.V. notch filters 50 cents each, convertor boxes \$50 each, magnetic strip card readers for ATM machines, bank cards, drivers license, and all types of data acquisitions all under \$200 each. You pay these super low prices when you deal directly with the manufacturers. When you order "Direct Connection" a 150 page directory published by Ed Treki Publications, you will receive the largest collection of names, addresses, and International manufacturers of these products never before available. Stop paying second, third and fourth hand prices and deal directly with the sourcel!! Order your copy of "Direct Connection" today for only \$99.95 plus \$5 shipping. All orders are sent C.O.D. Please call Ed Treki Publications 24 hour order hot line 914-544-2829.

CABLE BOXES - ALL MODELS - ALL CHAN-NELS Jerrold Impulse DP, DPV & DPBB's, Pioneer or Scientific Atlanta-Lowest Prices in U.S. -\$175.00 including remote, batteries and cable. Call for 10 lot pricing. Toll Free (888) 689-0779

BIG SALE!! NOTCH FILTERS \$18.00. EXTERNAL ACTIVATORS and DESCRAMBLERS FROM \$99.00. Test chips from \$5.00. BULLET/LD \$10.00. NAME BRAND CABLE DESCRAMBERS FROM \$135.00. LET US BEAT YOUR BEST PRICE. 1-800-449-9189 ANYTIME. SE HABLE ESPANOLE

CABLE "Bullet Terminator and I.D. Blocker." Electronically shields yourself and your box. Free Hackers Guide included. Lifetime guarantee. Wholesale prices. 1-800-820-9024.

CABLE Descrambler!! Anyone can build in seven steps with Radio Shack parts. Plans/Kit from \$5.00 plus Free Bonus!! 1-800-818-9103.

CABLE TV EQUIPMENT & ACCESSORIES. Wholesalers Welcome! 30 Day Moneyback Guaranteel Free Catalog! PROFORMANCE ELECTRONICS, INC. 1-800-815-1512

Cable descramblers including New T-2 Testers. Fully activates Jerrold DP-5-CFT22xx's. Multimode, Fiber optics. Descrambles everything permanently, guaranteed. Lowest single or lot prices available. Se habla en espanol. Call Cableking (203) 849-1759, 24 hours a day. Website address www.ntplx.net/-cablkingabl.htm.

Cable test modules/cubes. Pioneers, S/A, Tocoms, Jerrolds, Quantity discounts. Call DCR. Tel: (718) 624-8334, Fax: (718) 246-9731. No NY calls.

CABLE DESCRAMBLING, New secret manual. Build your own Descramblers for Cable and Subscription TV. Instructions, schematics for SSAVI, Gated Sync, Sinewave, \$12.95, \$2 postage. CABLETRONICS, Box 30502R, Bethesda, MD 20824

CABLE TV DESCRAMBLERS. ALL MAJOR BRANDS HAVE MAKE AND MODEL NUMBER OF CONVERTER USED IN YOUR AREA WHEN CALLING. QUANTITY DISCOUNTS. K.D. VIDEO, 1-800-327-3407.

SATELLITE EQUIPMENT

SKYVISION! Your Satellite Home Entertainment Source. Best values: DBS and C/Ku-band equipment, including 4DTV. Most complete selection: Parts-Tools-Upgrades-Accessories! Free Discount Buyer's Guide. Call 800-543-3025. International 218-739-5231. www.skyvision.com.

FREE DSS TEST CARD information package. Works on new system and turns on all channels including PPV, adult and sport channels. Write SIGNAL SOLUTIONS, 2711 Buford Rd., Suite 180, Richmond VA 23235.

DSS Hacking: How to construct and program smart cards, w/pic 16C84, software. Complete DSS system schematics, \$16.95. CABLETRON-ICS, Box 30502R, Bethesda, MD 20824.

VIDEOCYHER II descrambling manual. Schematics, video and audio. Explains DES, EPROM, CloneMaster, Pay-per-view \$16.95, \$2.00 postage. Schematics for Videocypher II Plus, \$20.00. Schematics for Videocypher II 032, \$15.00. Software to copy and alter EPROM codes, \$25.00. VCII Plus EPROM, binary and source code, \$30.00. CABLETRONICS, Box 30502R, Bethesda, MD 20824.

TEST EQUIPMENT

TEST Equipment pre-owned now at affordable prices. Signal generators from \$50.00, oscilloscopes from \$50.00. Other equipment including manuals available. Send \$2.00 US for catalog. Refunded on first order. J.B. Electronics, 3446 Dempster, Skokie, IL 60076. (847) 982-1973.

BUSINESS OPPORTUNITIES

ELECTRONICS BUSINESSES, Home based. Part/Full time. 250pg Comprehensive Guidebook, insider information. \$19.95 24hr recording (800) 326-4560 x 159

EASY WORK! EXCELLENT PAY! Assemble Products At Home. Call Toll Free 1-800-467-5566 EXT.

EDUCATION & INSTRUCTION

LEARN Electronics. Home study. Outstanding careers. Free literature. P.C.D.I., Atlanta, Georgia. 1 (800) 362-7070 Dept. ELF342.

CB-SCANNERS

CB Radio Modifications! Frequencies, kits, highperformance accessories, books, plans, repairs, amps, 10-Meter conversions. The best since 1976! Catalog \$3.00. CBCI, Box 31500EN, Phoenix, AZ 85046

COMPONENTS

SAVE \$\$\$ Reclaimed electro-mech/electronic components and assemblies. SASE for list. 800/334-1159, PMA Services, 22347 La Palma Ave. #106, Yorba Linda, CA 92887

MISC. ELECTRONICS WANTED

TUBES: "oldest". "latest". Parts and schematics. SASE for lists. Steinmetz Electronics, 7519 Maplewood Ave., Hammond, Indiana 46324.

WANTED

WANTED: USED TEST EQUIPMENT. TURN IDLE OR UNWANTED EQUIPMENT INTO CASH. AST GLOBAL ELCTRONICS: Voice 888-216-7159; Fax: 814-398-1176; e-mail:astmrk-te@usreet tesleit aget. tg@wrench.toolcity.net

SCRAMBLING NEWS

Best satellite TV news includes coverage of pira-Voice/Fax 716-283-6910. www.scramblingnews.com.

BEST BY

Rates: Write National, Box 5, Sarasota, FL 34230

HIGH SCHOOL DIPLOMA Fast, Accredited, Member Christian Schools International, 1-800-470-4723.

CASH NOW FOR FUTURE PAYMENTS! We buy payments from Insurance Settlements, Annuities, and Class Action Awards. We also buy Owner Financed Mortgage Notes. Call R&P Capital at 1-800-338-5815, Ext. 500.

TOP \$\$\$\$s FOR TD's, Contracts, Mortgage Notes: 1-888-544-

ELIMINATE HOUSEHOLD PESTS using the Ultrasonic Pestrepeller. Money-back guarantee. 1-888-430-7576 Ext.



A public service of this magazine

PC - Based Test Instruments For Automatic Testing at Bench-Top Prices

- Instrument-on-a-card to plug into PC slot, and turn PC into a test station for automatic testing.
- An operation program included with instrument card, no need for extra software.
- No IEEE488 or RS232 hassle.

100 MHz Dual Universal Counter · · · · · 6 MHz Function/Sweep Generator · · · · \$549 60 MHz Digital Storage Scope · · · · · · · · 100 MHz Digital Storage Scope · · · · · · ·

For spec and to download demo : www.tcinst.com



29 Chaparral Dr., Pomona, CA 91766, USA • Tel: (909) 622-2006 • Fax: (909) 622-7778

ATTENTION DEALERS: WHOLESALE ONLY!



BEST PRICES! FAST SERVICE SAME DAY SHIPPING



Wavemaster 99 Channel

• Sleep Timer • Std./HRC Switch • Parental Control

20 +10 +50 +45 52



516-246-5634

ADVERTISING INDEX

Electronics Now does not assume any responsibility for errors that may appear in the index below

ree I	nformation Number	Page	Free	Information Number	Pag
-	Abacom Technology	84	319	IVEX Design	
-	ABC Electronics	96	_	IVEX Design	9
-	Adeplex, Inc.	7	_	James Electronics	10
-	Aegis Research, Canada	74	330	Link Instruments	9
-	AES	93	_	Lynxmotion	
13	Alfa Electronics	73	_	M ² L Electronics	10
14	All Electronics	101	326	Mark V Electronics	6
-	Allison Technology	70	327	MCM Electronics	
-	Amaze Electronics	74	251	Mendelson Electronics Su	ırplus
82	American Eagle Publicati	ons80	_	Meredith Instruments	
_	Andromeda Research	92	323	Merrimack Valley System	ıs
	Arrow Technologies	96	133	MicroCode Engineering.	C
13	Basic Electrical Supply	78	_	microEngineering Labs	1/
_	Bossman Electronics		_	Midwest Laser Products.	
09	Butterworth-Heinemann.		_	Mo-Tech Distributors	
22	C&S Sales, Inc.		_	Modern Electronics	
20	Capital Electronics			Mondo-tronics Inc.	
32	Circuit Specialists		325	Mouser Electronics	
-	CLAGGK, Inc.		316	NCD Electronics	
	Cleveland Inst. of Electro			NRI Schools	
	Command Productions		_	NS International	
-			_	Orion	
26	Computer Monitor Maint		262		
26	Consumertronics		262	Parts Express Inc	
27	Cool Amp Conducto Lub		_	PC Boards	
-	CRC Press		_	Pioneer Hill Software	
15	Dalbani Electronics		_	Point Six	
35	Danbar Sales		_	Polaris Industries	
-	Deco Industries		324	Prairie Digital	
12	Dynamic Technology		264	Print (Pace)	
-	EDASHOP	104	_	QB Video	
-	EDE - Spy Outlet	100	266	Ramsey Electronics	
-	Electronic Tech. Today	9	311	Roger's Systems Speciali	
-	Emac Inc	80	_	SE International	
-	Fair Radio	72	_	Sil Walker	
-	FerretTronics	94	270	Skyvision Inc	
35	Foley-Belsaw	89	_	Square 1 Electronics	
28	Fotronic	80	321	Sun Equipment	C
34	Gateway Products	82	_	Tab Books	
_	General Device Instrume	nts94	_	TC Instruments	
22	Global Specialties	33	_	Tekview	
_	Grantham Col. of Engine	ering4	318	Telulex	
29	Graymark International	_	_	Test Equipment Sales	
_	Home Automation		275	Timeline	
31	Howard Electronics		_	U.S. Cyberlab	
	Howard Electronics		317	Visitect Inc	
_	IEC		_	Weeder Technologies	
	Information Unlimited		314	White Star Electronics	
	and marron Chilling Cu.,	······································	217	THE DESI DICTIONES	

ADVERTISING SALES OFFICES

Gernsback Publications, Inc. 500 Bi-County Blvd. Farmingdale, NY 11735-3931 1-(516) 293-3000 Fax 1-(516) 293-3115

Larry Steckler publisher (ext. 201) e-mail advertising@gernsback.com

Adria Coren vice-president (ext. 208)

Ken Coren

vice-president (ext. 267)

Christina Estrada
assistant to the publisher (ext. 209)

Arline Fishman advertising director (ext. 206)

Marie Falcon advertising assistant (ext. 211)

Adria Coren credit manager (ext. 208)

For Advertising ONLY

EAST/SOUTHEAST

Stanley Levitan
Eastern Advertising
1 Overlook Ave.
Great Neck, NY 11021-3750
1-516-487-9357
Fax 1-516-487-8402

Fax 1-516-487-8402 slevitan26@aol.com

MIDWEST/Texas/Arkansas/Okla.
Ralph Bergen

Midwest Advertising One Northfield Plaza, Suite 300 Northfield, IL 60093-1214 1-847-559-0555 Fax 1-847-559-0562

bergenrj@aol.com

PACIFIC COAST
Janice Woods

Pacific Advertising Hutch Looney & Associates, Inc. 6310 San Vicente Blvd., Suite 360 Los Angeles, CA 90048-5426 1-213-931-3444 (ext. 228)

Fax 1-213-931-7309 woodyowl@aol.com

Electronic Shopper Joe Shere

National Representative P.O. Box 169 Idyllwild, CA 92549-0169 1-909-659-9743

Fax 1-909-659-2469 Jshere@gernsback.com

Megan Mitchell
National Representative
9072 Lawton Pine Avenue
Las Vegas, NV 89129
Phone/Fax 702-838-6924
Lorri88@aol.com

Customer Service 1-800-999-7139 7:00 AM - 6:00 PM M-F MST

Reader Service Card

MAIL-FAX OR E-MAIL YOUR REQUEST

Now you have 3 ways to request free information on products and services featured in this issue

To insure a prompt reply, please furnish all requested information

To Receive Information on **Products** and Services in This Issue

Circle the numbers corresponding to the advertised products or editorial items that interest you. Mail Card or Fax To: (413) 637-4343 or E-Mail your request to: BERKCOMP@AOL.COM.

For E-Mail users, your subject is **Electronics Now 5/98** Format your message:

- · Name and Address information
- Telephone and Fax numbers
- Requested item numbers separated by commas
- · Responses to survey questions separated by dashes or slashes

NOTE: Submit all Free Information requests by EITHER Fax, mail, or E-Mail **DUPLICATE** REQUESTS WILL BE **DISCARDED**. Use for Free Information only. Address all editorial inquiries to Editor. Electronics Now. 500 Bi-County Blvd., Farmingdale, NY 11735-3931

BU	SINESS PR	OFESSIONAL FE	REE	INF	OF	RM	AT	10	N	CA	IR	D				
Floren		Ar	DAE6		31	60	89	110	147	176	205	224	262	202	221	350
Electr	MINITE	41	MEO		32	61	90			177						
LIGGII	VIIIG				33	62	91			178						
	NOW _®				34	63	92	121	150	179	208	237	266	295	324	350
					35	64	93	122	151	180	209	238	267	296	325	354
Name		Title			36	65	94	123	152	181	210	239	268	297	326	35
					37	66	95			182						
Company					38	67	96			183						
Dept. MS					39	68	97			184						
					40	69 70	98			185 186						
Daytime Business Price	one				41	71				187						
Company Address				14	43	72				188						
		Zip +4		15	44	73				189						
City	State	Zip +4		16	45	74	103	132	161	190	219	248	277	306	335	364
Unclear or incomplete n	nailing info will prever	it our processing this request.		17	46	75	104	133	162	191	220	249	278	307	336	365
2 Please send me 1	12 incurs (1 year) of El	ECTRONICS NOW for \$19.97	and	18	47	76	105	134	163	192	221	250	279	308	337	366
hill me (Canada)	\$27.79 — US Funds or	ly — Includes G.S.T.)	illa	19	48	77	106	135	164	193	222	251	280	309	338	367
				20	49	78				194						
4 Please send me 1	12 issues (1 year) of PO	PULAR ELECTRONICS for \$18	3.95	21	50	79				195						
and bill me. (Can	ada \$25.63 — US Fund	s only — Includes G.S.T.)		22	51	80				196						
				23	52	81				197						
Do you service ele	ctronic equipment	? 5 ☐ Yes 6 ☐ No		24 25	53	82				198						
What kind of electr				26	55	84				200						
7 Consumer Fle	ectronics 8 Con	nouters		27	56	85				201						
9 Communication	ns 10 🗆 Indi	istrial Electronics		28	57	86				202						
3 - Communicatio	713 TO ITIAC	1011.d. 2.001.011100		29	58	87	116	145	174	203	232	261	290	319	348	37
VOID after July 31, 19	998 Allow 6	-8 weeks for delivery of first i	ssue	30	59	88	117	146	175	204	233	262	291	320	349	37
-											66					

BUSINESS PROFESSIONAL FREE INFORMATION CARD

4DAE6

20

29 58 87

	NOW®		
Name		Title	
Daytime Business Ph	one		
Company Address			
City	State	Zip +4	
		t our processing this reque	
	12 issues (1 year) of EL \$27.79 — US Funds or	ECTRONICS NOW for \$19.9	7 and

- 4

 Please send me 12 issues (1 year) of POPULAR ELECTRONICS for \$18.95 and bill me. (Canada \$25.63 - US Funds only - Includes G.S.T.)

Do you service electronic equipment? 5 ☐ Yes 6 ☐ No

What kind of electronic equipment do you service?

7 ☐ Consumer Electronics 8 ☐ Computers

10 Industrial Electronics 9
Communications

Allow 6-8 weeks for delivery of first issue VOID after July 31, 1998

116 145 174 203 232 261 290 319 348 377

30 59 88 117 146 175 204 233 262 291 320 349 378

60 89 118 147 176 205 234 263 292 321 350

To Order a New Subscription or To Renew an Existing Subscription Call 1-800-999-7139

.20¢ POSTAGE REQUIRED IN U.S.A.



READER SERVICE MANAGEMENT DEPT. P.O. BOX 5192 PITTSFIELD, MA 01203-9989

> .20¢ POSTAGE REQUIRED IN U.S.A.



READER SERVICE MANAGEMENT DEPT. P.O. BOX 5192 PITTSFIELD, MA 01203-9989 Sun Equipment Corporation

P. O. Box 97903, Raleigh, NC 27624 E-mail: sunequipco@ipass.net To request FREE CATALOG, please call, fax, write, or e-mail us.

Quality Test Equipment for Cost-Minded People

LODESTAR Lodestar Electronics Corp. Since 1979

One Year Warranty. 15 Day Money Back Guarantee. 0EM WELCOME. School purchase order accepted. Bids accepted. VISA, Mastercard

SALES REP/DISTRIBUTORS/OEM WANTED. Discover, AmrExpr 1-800-870-1955 / (919)870-1955 Fax:(919)870-5720

DC POWER SUPPLY (CC/CV

All models: protection of short ckt, overload, reverse polarity, overvoltage; Constant Current & Voltage (CC/CV) are fully adjustable. Regulation: <.01%+3mV (line); <.01%+3mV (load); <1mV ripple. SINGLE OUTPUT



Analog Displays PS-303 \$159.00, 30V/3A PS-305 \$219.95, 30V/5A PS-1610S \$289.00, 16V/10A. PS-2243 \$139.00, 12V/24V select, 3A. PS-2245 \$159.00, 12V/24V select, 5A. 8107 \$399.95, 30V/10A. 8110 \$289.95 60V/3A 8112 \$399.95, 60V/5A

Digital Voltmeter & Analog Ammeter 8200(8201) \$179.95(\$239.95), 30V/3A(\$A) Digital Displays 8210/8300 \$199.95, 30V/3A

8211/8301 \$259.95, 30V/5A. **DUAL OUTPUTS** Independent/Tracking Analog Displays 8108 \$549.95, 60 V/3A. 8109 \$699.95, 60V/5A. PS-303D \$314.95, 30V/3A.

CPG-1366A \$159.95, VHF NTSC; Freq.: 45.75, 175.25, 187.25 MHz.

CPG-1367A \$159.95, VHF PAL

330 \$119.95, 1.8-520MHz. Spec. see 310.

RF Power: 0.5-10W, 0.5W-100W.

SWR-2P \$22.95, 1.7-30MHz; RF Power: 0.5-10W.

SWR-1P \$26.95 1 7-150MHz

RF Output: 10mV

Impedance: 75 Ohm:

Video Output: BNC, IV,



建设施数型排

WARREN .W.

310 \$89.95, 1.8-150MHz; RF Power:

Measurement .: 1.0--- 4W minimum.

320 \$89.95, 130-520MHz. Spec. 310.

0-4W/20W/200W 3 ranges; SWR

PS-305D \$399.95, 30V/5A TRIPLE OUTPUTS, a fixed 5V/3A output, Independ/Tracking Digital Displays 8202(8203) \$499.95(\$549.95), dual 30V/3A(5A). Analog Displays 8102(8103) \$399.95(\$489.95), dual 30V/3A(5A), with Parallel (30V/6A) and Series (60V/3A) Mode operation NTSC/PAL TV COLOR BAR GEN.

SWR/RF/mW POWER METER

SG-4160B \$124.95, 100KHz-150MHz DM-4061 \$89.95 1.5-250MHz, up to 450MHz on 3rd harmonics in 6 ranges; AM modulation; Accucy: ±5%. RF Output: 100mVrms to 35 MHz; Modulation: Int. 1KHz (AM) =30%; Ext. 50Hz-20KHz, at least 1V_{ma} input. Audio Output: 1KHz, 2Vm minimum

SG-4162AD (with Freq. Counter) \$229.95, Spec. see SG-4160B. COUNTER SECTION: 10Hz-150MHz, Max. Input: s3V effective Gate Time: .1, Isec. Input Sensitivity: 35mV, 10Hz-200MHz. Input Impedance: 1MQ(HF), 50Q(VHF). Display: 7-digit LEDs

RF SIGNAL GENERATOR

AM/FM STD SIGNAL GEN.

SG-4110A \$1799.00, Freq: 0.1-110MHz; Display: 6-digit LED; Resolution: 100Hz (0.1-34.999MHz); 1KHz (35MHz-110MHz). Accuracy. <±(5x105 ±1 count); Output: -19dBu-99dBu, 1dB steps. Impedance: 500 VSWR 1.2, 100 preset frequency & store function

AUDIO GENERATOR



AG-2601A \$124.95, 10Hz~1MHz in 5 10Hz-600MHz; 10-digit LEDs ranges; Output: sinewave 0-8V_{mas}; squ- FC-5700 \$299.95 10Hz-1.3GHz; 10-digit LEDs. Period measure are 10Vp.p. Output Imped: 600 Ohrn. Distortion: <0.05% 500Hz-50KHz: <0.5% 50KHz~500KHz. AG-2603AD \$229.95, with 6-digit,

Int/Ext. Freq Counter, 10Hz-150MHz, aput Control: 0/-20/-40dB & Fine adjuster. Spec. see AG-2601A

GRID DIP METER


6 bands; 6 plug-in coils. 2 transistor, and 1 diode Modulation: = 2KHz Sinewave. Crystal Oscillator: 1-15MHz. Wave absorption meter, 9VDC battery



FREQUENCY COUNTER



(HF)10Hz-20MHz, (VHF)10-200MHz. GateTime: .1, Isec. Max. Input: 10Vp.p. Input Sensitivity: 35mV/10Hz-200MHz Input Imped.: 1MO(HF), 50O(VHF). Display: 7-digit LEDs; 9V adapter (\$6)



SIGNAL TRACER/INJECTOR

SE-6100 \$134.95 (9VDC adapter, \$6.0) TRACER: Gain 60dB maximum. Attenuation: 0/20/40/60dB Input Imped: 100KQ; Meter: Vu 100µA Output Imped.: 6000; Speaker: 8 0.
INJECTOR: =1KHz Squarewaye:

ly variable 0 - 4.5V pp; 9V battery/adaptor LCR METERS

MIC-4070D \$179.95, Induct.: 0.1µ~200H, Capacit.: 0.1p~20mF,

FUNCTION GENERATOR



FG-2100A \$169.95, 0.2Hz-2MHz in ranges; sne, square, triangle, pulse & Ramp; Output: 5mVp. 20Vp. 1% distortion. VCF: 0-10V/freq. to 1000:1. FG-2102AD \$229.95 see FG-2100A; 4-digit counter display, TTL & CMOS outputs, 30ppm ±1 count accuracy.

FG-2020B \$159.00 0.5Hz-500KHz; Sine, Square, Triangle. FG-2103 \$329.95, Digital sweep generator, 0.5Hz-5MHz in 7 ranges. Operating Mode: sweep, AM, gated burst, VCG. Accuracy: 5%-10%; Insert Loss: .3dB Freq. Counter: Int. 0.5Hz-5MHz, Ext. 5HZ-10MHz. Input/Output Imp.: 500; SO-239 plug FG-513 \$769.95, 13 MHz, Microprocessor embedded dgital sweep; Sine, Square, Triangle, Pulse, Ramp, TTL & DC; ±(.01%+1dgt).

Free. Counter & TCXO: 5Hz-100MHz, 6.5 digits: x1/x20 attenuate



000

AC MILLIVOLT METER



MV-3100A \$159.95 wide band 5Hz~1MHz; 3 scales, mV, dB &dBm; 300μV~100V in 12 ranges, 10μV resolution; -70-40dB in 12 ranges, 0dB=1Vrms.0dBm=0.755V): ±3% accuracy; Input impedance 10MQ; Noise <2%. MV-3201B \$309.95 dual channels, simultaneous measurement

Resist.: 1m0-20MO, 20 range, Dissipation factor measurement, Zero adjust; Surface mount device (SMD) test probe: LT-06 \$21.95 DIGITAL MULTIMETER



DMM-120 \$24.95, 31/2 digit, 600 VDC, 2ADC 500VAC, 2MQ, hFE/diode/continuity test. DMM-123+Capacitance \$44.95, 31/4 digit, 600VDC/600VAC, 10ADC/AC, 2GO, 20µF, hFE/diode test, continuity beeper. DMM-124+Cap.+Temp.+Freq Cntr \$69.95, 31/4 dig, 600 VDC/500 VAC, -58~752° F, 2GO, 20mF, 200KHz, 3\phi phase/diode/continuity test. DMM-125 \$54.95, Autorange/Bargraph, 32MQ. 600VDC/AC, 10ADC/AC, diode/continuity test. MIC-35 \$59.95, Autorange, 31/4 digit LCD, 1000VDC/750VAC, 20MQ, 20ADC/AC,

diode/continuity check, data hold, free holster. MIC-39 \$129.95, Autorange/Bar Graph, True RMS, 31/4 digit, LCD, 40MΩ, 40μF, 1000VDC/750VAC, 20ADC/AC, 600KHz freq. cntr, data hold, drop-prove, sleep mode, memory, read functions, holster

±10% full scale; SWR <1.15; N-type connector, BNC type output **FM STEREO MODULATOR**

mW RF Power Meter 340 \$219.00, 1.8-500MHz, RF

Power: 20mW/200mW/2W 3 ranges; Imped.: 500; Accuracy:

AG-2011A \$549.00 RF SECTION: Carrier: 98MHz ±2MHz; Output: 10mV, 1mV & 0.1mV COMPOSITE SIGNALS: Pilot: 19KHz ±2Hz, 0.8Vrms INT. MODULATION: 400KHz.



1KHz ±1%, 1Vrms, distortion < .5%;L-R Separation: >50dB EXT. MODULATION: Freq.: 50Hz-15KHz L-R Separation: >45dB 100Hz-3KHz: >35dB 50Hz-15KHz TOOLKITS - ELECTRONIC/PC

with securers & bows, 3-prong part retriever, #0 phillips screwdriv-

er, 1/8" flat srewdriver, self-hold tweezers, metal tweezers, extra

parts tube, soldering iron, solder, crimping tool, long-nose plier,

T27/T30/T40/T45; Hex: 5/64*/3/32"/1/8"/5/32"/3/16"; Sockets:

cutting plier, zipper vinyl case. Bits include: Phillips: #0/#1/#2/#3, Flat: 1/8"/3/16"/1/4"/9/32"; PZ1/PZ2; T8/T9/T10/T15/T20/T25/

3/16" (5mm)/7/32" (5.5mm)/1/4" (6mm)/9/32" (7mm)/5/16" (8mm).

8G23 \$34.99 23-pcs Contents: IC inserter/extractor with securer &

bows, 3-prong part retriever, 3/16"/1/4" nutdriver, 3/16"/ 1/8" slot-

ed screwdriver, #0/#1 phillips, reversible T10/T15 bits, re-versible

#2 phillips/¼" slotted bits, tweezer, long-nose plier, cutter, 6" adj. wrench, soldering iron, solder, crimping tool, zipper case, manual.

Different packages available, call/write/e-mail/fax for detail.

STEREO/ALIGNMENT/SWEEMAR SCOPE

ALIGNMENT SCOPE OS-7001A \$369.00, 0-200KHz/1mV.

STEREO SCOPE OS-7505B \$369.00, 0-10MHz/20mV

OSCILLOSCOPES



OS-7305B \$249.00 DC-7MHz, 3° CRT; Horz: .25V/div; 10Hz-100KHz in 4 ranges; Vert: 10mV/div; Int. & Ext. Sync.; Input: 1MQ/35pF. OS-7010A \$299.95 10MHz, 5"CRT, Horz: .2V/div; Vert:10mV~10V /div. OS-622G \$389.95 20MHz, 2 CH/X-Y Alt trigger, trigger lock, hold OFF, TV

syn., 8x10 div., 1mV/div., Horz: .2µs-.5s/div, Vert: 1mV-5V/div. OS-653G \$699.95 50MHz, 2 CH/delay sweep, Alt trigger, TV syn. OS-6101G \$1499.95 100MHz, 4ch/8 traces, delay sweep, cursor readout. 2 years warranty for OS-622G, OS-653G, & OS-6101G.

UHF ATTENUATORS

RT-8815U (500) \$299.00 / RT-8817U (750) \$299.00, 950MHz, 81dB, 0.5W max.; Steps: 1/2/3/5/10/20/20/20, 8 switches. 085E-2 (500) \$399.00 / 087E-2 (750) \$399.00, 950MHz, 81dB, 0.5W max.: Steps: 10dB+7.1dBx10. Electronic adjustment knob

MICROPROCESSOR TRAINER



nt for school & individual who want to learn about ROM, RAM, I/O ports, programming. & run a 8088 Microprocessor. An easy to understand stepby-step manual guides you to achieve your goal. 56-key keyboard, LCD display, RS-232, UART

AUTO. CAPACITANCE METER

CM3300A \$139.00 10 ranges, 99.9pF ~ 99.9mF, fully automatic Resolution: 0.1pF lowest, 0.1% full scale. Accuracy: 0.5% of full scale ±1 digit to 99.9 µF. 1% of full scale ±1 digit to 99.9 µF. Display: 3 digit LED. Unit: pF, nF, uF, mF, Overrange indicators

AUTO DISTORTION METER

DM-3104A \$799.95 DISTORTION MEASURE Range: 0.01% to 30% 0.1/0.3/1/3/10/30% 6 ranges. Freq: 400Hz±10%, 1KHz±10%(HPF). Input: 3mV-100V; Ratio measure 20dB. Auto, Freq. Switching Ranges: Fundamental Freq. = (fo)±10%;

Fund. Rejection: >-80dB at (fo)±5%; >-70dB at (fo)±10%. Harmonic Accuracy: ±0.5dB, 1.8(fo)-20KHz. LEVEL MEASURE Range: 0 to 100V in .03/.1/.3/1/3/10/30/100V

BGC-8088 \$699.00, learn Freq Response: ±0.5dB/20~50kHz; ±1dB/20~100kHz. computer theory. Excelle- DM-3204 \$1,599.00 dual channels; Spec see DM-3104A

WOW-FLUTTER METER



WF-3103A \$699.95 Freq. Range: 3KHz±10% JIS/CCIR; 3.15KHz±10% DIN. Measuremt: 03/1/3/1/3% full scale Accuracy: ±5% of full scall. WF-3105A \$799.95, digital display; Function: LIN/WOW/Flutter/WTD. Freq Counter: 10Hz-9.99MHz. Indication; CCIR/DIN/JIS.

......

11.4MHz; Accuracy: ± 0.1%; Marker

SWEEMAR SM-6225B/C \$1999.95 Freq Range: (AM)490KHz; (FM)10-(AM)455KHz, ±5KHz, ±10KHz; (FM)10.7MHz, ±7.5KHz, ±150KHz

Better Designs - Faster

With the Personal Design Solution

The Design Solution Includes: Electronics Workbench Personal Edition + EWB Layout



Electronics Workbench Layout Personal Edition

Power-packed PCB layout with

autorouting and real-time DRC!

producing high-quality, multi-layer printed circuit boards.

program, you can incorporate board layout and design


and quickly bring well-designed boards to production.

EWB Layout is a powerful board layout package for

Offering tight integration with our schematic capture

Full-featured schematic capture and SPICE 3F circuit simulation!

The world's best selling circuit design software. With analog, digital and mixed A/D SPICE simulation, a full suite of analyses and over 4000 devices. Imports netlists. Seamlessly integrated with EWB Layout or exports to other popular PCB programs. Still the standard for power and ease of use. Still the same effective price.



\$299 Version 5

CHANGE OF THE PARTY OF THE PART

\$299 Version 5

HIGH-END FEATURES

TRUE MIXED ANALOG/DIGITAL
FULLY INTERACTIVE SIMULATION
PRO SCHEMATIC EDITOR
HIERARCHICAL CIRCUITS
VIRTUAL INSTRUMENTS
ON-SCREEN GRAPHS
ANALOG AND DIGITAL MODELS
FREE TECHNICAL SUPPORT
DC OPERATING POINT
AC FREQUENCY
TRANSIENT
FOURIER
NOISE
DISTORTION

YES	
YES	
OVER	4,00
YES	

POWER-PACKED FEATURES

LOAFIL I WOILED I TWICKED	
AUTOROUTING	YES
REROUTE WHILE MOVE	YES
LAYERS	32 ROUTING LAYERS
BOARD SIZE	50" X 50"
LIBRARY SHAPES	OVER 3,500
BLIND AND BURIED VIAS	YES
EXTENSIVE OUTPUT	YES
SELECTIVE NET HIGHLIGHTING	YES
USER DEFINED PADS	YES
REAL TIME DESIGN RULE CHECK	YES
DENSITY HISTOGRAMS	YES
FREE TECHNICAL SUPPORT	YES

Join over 85,000 customers and find out why more circuit designers buy Electronics Workbench than any other circuit design tool.

CALL FOR INFORMATION AND PRICING ON OUR PROFESSIONAL EDITION.

30-DAY MONEY-BACK GUARANTEE

EWB LAYOUT Personal Edition

ELECTRONICS WORKBENCH Personal Edition \$299.00

\$299.00

BUY BOTH AND SAVE

PERSONAL DESIGN SOLUTION

\$598.00

CALL 800-263-5552

For a free demo, visit our website at http://www.interactiv.com

INTERACTIVE IMAGE TECHNOLOGIES LTD., 908 Niagara Falls Boulevard, #068, North Tonawanda, New York 14120-2060 / Telephone 416-977-5550.
TRADEMARKS ARE PROPERTY OF THEIR RESPECTIVE HOLDERS. OFFER IS IN U.S. DOLLARS AND VALID ONLY IN THE UNITED STATES AND CANADA. ALL ORDERS SUBJECT TO \$15 SHIPPING AND HANDLING CHARGE.

Fax: 416-977-1818 E-mail:ewb@interactiv.com CompuServe: 71333,3435 / BBS:416-977-3540

